# DOREX®

**G2**

c **UL** us LISTED

3H

5 YEAR

| | |
|---|---|
| **Type** | • Cylindrical lock |
| **Certifications** | • Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2 <br> • cULus listed, 3hr fire-rating <br> • UL 10C Positive Pressure Rating <br> • 5 Year limited warranty |
| **Door Thickness** | • 1⅜–1¾" (35–44.5 mm) |
| **Handing** | • Non handed |
| **Backset** | • 2¾" (70 mm) <br> • 2⅜" (60 mm) – available <br> • 3¾" (95 mm) – available <br> • 5" (127 mm) – available |
| **Spring Latch** | • Stainless steel, ½" (12.7 mm) throw |
| **Faceplate** | • Mortise type, square corners <br> • 1⅛ x 2¼" (28.5 x 57 mm) <br> • 2⅜" (60 mm) backset: 1 x 2¼" (25.4 x 57mm) |
| **Strike** | • ASA Strike |
| **Trim** | • Brass or stainless steel knob* <br> • Brass or stainless steel rose* <br> • Rose diameter: 3" (76 mm) <br> *(*) Material dependant on finish.* |

| | |
|---|---|
| **Chassis** | • Concealed mounting plate and screws |
| **Preparation** | • Cross bore: 2⅛" (54 mm) <br> • Edge bore: 1" (25.4 mm) |
| **Cylinder** | • Solid brass, 6-pin <br> • Schlage "C" keyway, 2 keys <br> • Removable, rekeyable <br> *Other keyways and keying options available, including CX5 high security* |

**Functions**

| | | | |
|---|---|---|---|
| **10** | Passage | **60** | Store |
| **15** | Exit | **70** | Classroom |
| **17** | Dummy, single | **79** | Institution exit |
| **32** | Patio | **80** | Storeroom* |
| **42** | Privacy | **82** | Institution/utility |
| **53** | Entry* | | |

*(*) Available without core cylinder (LC)*

| | |
|---|---|
| **Finish** | **C3**–Polished brass, **C32D**–Stainless steel <br> *Other finishes available by special order* |

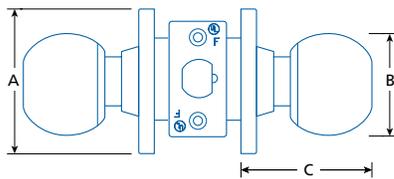| TL | 53 | B | C32D | 238 |
|---|---|---|---|---|
| SERIES | FUNCTION | STYLE | FINISH | OPTION¹ |

(1) OPTION: **238** 2-3/8IN (60MM) BACKSET   **LC**–LESS CORE (53 & 80)

## SELECTION GUIDE

| SERIES | FUNCTION [1] | | STYLE | FINISH [1] | / CASE |
|--------|--------|------|-------|------------|--------|
| TL | 10 | Passage | B | C3, C32D | 20 |
| TL | 15 | Exit | B | C3, C32D | 20 |
| TL | 17 | Dummy, single | B | C3, C32D | 40 |
| TL | 32 | Patio (includes full-lip D-Strike) | B | C32D | 20 |
| TL | 42 | Privacy | B | C3, C32D | 20 |
| TL | 53 | Entry ☞ | B | C3, C32D | 20 |
| TL | 53 LC | Entry, housing only (less core) ☞ | B | C32D | 20 |
| TL | 60 | Store ☞ | B | C32D | 20 |
| TL | 70 | Classroom ☞ | B | C3, C32D | 20 |
| TL | 79 | Institution / exit ☞ | B | C32D | 20 |
| TL | 80 | Storeroom ☞ | B | C3, C32D | 20 |
| TL | 80 LC | Storeroom, housing only (less core) ☞ | B | C32D | 20 |
| TL | 82 | Institution / utility ☞ | B | C32D | 20 |

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED
☞ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE



| | A | B | C |
|---|---|---|---|
| **TL B** | 3 (76) | 2⅛ (57) | 2⅝ (67) |

IN (MM)

## PARTS & ACCESSORIES

**9102**
Full lip D-Strike, adjustable tab; square corners:
1¾ x 2¼" (44.5 x 57 mm)

**9106**
T-Strike, square corners:
1⅛ x 2¾" (28.5 x 70 mm)

**9106NH**
T-Strike, no hole; square corners:
1⅛ x 2¾" (28.5 x 70 mm)

**ASA-T**
ASA strike, adjustable tab; square corners

**ASANH**
ASA strike, no hole; square corners

**TL020**
Plastic spacer for latches with 1 x 2¼"
(25.4 x 57 mm) faceplate to fit preparations
for 1⅛ x 2¼" (28.5 x 57 mm) faceplates

**TL013**
Backset extension to 3¾" (95 mm);
Use with 2⅜" (60 mm) backset latch

**TL014**
Backset extension to 5" (127 mm);
Use with 2¾" (70 mm) backset latch Use with
2¾" (70 mm) backset latch

**TL001**
Passage latch: 2⅜" (60 mm) backset,
1 x 2¼" (25.4 x 57 mm) faceplate

**TL003**
Passage latch: 2¾" (70 mm) backset,
1⅛ x 2¼" (28.5 x 57 mm) faceplate

**TL010**
Privacy latch: 2⅜" (60 mm) backset,
1 x 2¼" (25.4 x 57 mm) faceplate

**TL002**
Privacy latch: 2¾" (70 mm) backset,
1⅛ x 2¼" (28.5 x 57 mm) faceplate

**TL005**
Deadlatch 2⅜" (60 mm) backset
1 x 2¼" (25.4 x 57 mm) faceplate

**TL004**
Deadlatch: 2¾" (70 mm) backset,
1⅛ x 2¼" (28.5 x 57 mm) faceplate

**TL006**
Deadlatch: 5" (127 mm) backset,
1⅛ x 2¼" (28.5 x 57 mm) faceplate

**TL011** (for function 32 or 94)
Deadlatch: 2⅜" (60 mm) backset,
1 x 2¼" (25.4 x 57 mm) faceplate

**TL012** (for function 32 or 94)
Deadlatch: 2¾" (70 mm) backset,
1⅛ x 2¼" (28.5 x 57 mm) faceplate