



- Certifications**
- Conforms to ANSI/BHMA A156.36, Grade 1
  - cULus listed, 3hr fire-rating
  - 10 Year limited warranty
- Door Thickness**
- 1 $\frac{1}{16}$ –2" (40–51 mm)
  - Kit for 2 $\frac{1}{4}$ " (57 mm) – available
- Handing**
- Non handed
- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
  - 2 $\frac{3}{8}$ " (60 mm) – available
- Deadbolt**
- Solid brass with hardened steel security pin
  - 1" (25.4 mm) throw
- Faceplate**
- Mortise type, square corners
  - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (29x57 mm)
- Strikes**
- Wood & steel frame strikes; square corners
  - 1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (29x70 mm)
  - Plastic dust-box
- Other strikes available*
- Chassis**
- Free-spinning cylinder collar
  - Steel cylinder housing
  - Concealed mounting screws

- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
  - Edge bore: 1" (25.4 mm)
- Cylinder**
- Solid brass, 6-pin
  - Schlage "C" keyway, 2 keys
  - Removable, rekeyable
  - Small format interchangeable core (SFIC) model – available\*
- Other keyways and keying options available, including CX5 high security. (\*) BEST® and CX5® cores sold separately.*
- Functions**
- 51 Single cylinder, thumb-turn
  - 60 Double cylinder
  - 70 Single cylinder, thumb-turn (Classroom)
- Less Core (LC) available – see selection guide*
- Finish**
- C15–Satin nickel, C15A–Antique nickel, C26D–Satin chrome, C3–Polished brass, V3–Polished brass (Endurance)
- Other finishes available by special order*

GX1A	51	C26D	LC
SERIES	FUNCTION	FINISH	OPTION <sup>(1)</sup>


(1) OPTIONS: 238-2 3/8IN (60MM) BACKSET LC-LESS CORE (51 ONLY) WEI-WEISER KEYWAY

## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
GX1A	51 Single cylinder, thumb-turn ↔	C15, C15A, C26D, C3, C5, V3	12
GX1A	51 LC Single cylinder, thumb-turn, less core ↔	C26D	12
GX1A	51 WEI Single cylinder, thumb-turn, 5-pin Weiser keyway ↔	C26D, C3, C5	12
GX1A	51 IC Single cylinder SFIC, thumb-turn, 7-pin BEST® F core included ↔	C15, C26D	12
GX1A	60 Double cylinder ↔	C26D	12
GX1A	60IC Double cylinder SFIC, 7-pin BEST® F core included ↔	C26D	12
GX1A	70 Single cylinder, thumb-turn (Classroom) ↔	C26D	12
GX1A	70IC Single cylinder SFIC, thumb-turn, 7-pin BEST® F core included (Classroom) ↔	C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

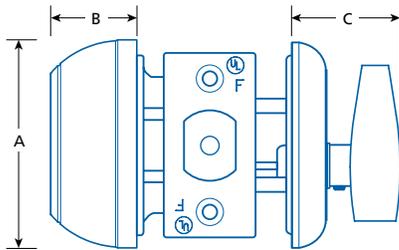


	A	B	C
GX1A	2 <sup>15</sup> / <sub>32</sub> (63)	1 <sup>1</sup> / <sub>16</sub> (27)	1 <sup>9</sup> / <sub>32</sub> (32.3)

IN (MM)

## PARTS & ACCESSORIES



**9111**  
Steel frame strike; square.  
1<sup>1</sup>/<sub>8</sub>x2<sup>3</sup>/<sub>4</sub>" (29x70mm)



**LM9111**  
Steel (square) and wood (round) frame security strikes.  
1<sup>1</sup>/<sub>8</sub>x2<sup>3</sup>/<sub>4</sub>" (29x70mm)



**9118**  
Wood frame strike; square.  
1<sup>1</sup>/<sub>8</sub>x2<sup>3</sup>/<sub>4</sub>" (29x70mm)

**9118R**  
Wood frame strike; round.  
1<sup>1</sup>/<sub>8</sub>x2<sup>3</sup>/<sub>4</sub>" (29x70mm)



**9807**  
CX5 high security SFIC core, 7 pin, 0 bitted

**CBI-BF6KD-26D**  
BEST® F type SFIC core, 6 pin, 0 bitted

**CBI-BF7KD-26D**  
BEST® F type SFIC core, 7 pin, 0 bitted



**TL007**  
Deadbolt: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1 x 2<sup>1</sup>/<sub>4</sub>" (25.4x57 mm) faceplate

**TL008**  
Deadbolt: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**TLA85052**  
Longer spindle and screw kit for 2<sup>1</sup>/<sub>4</sub>" (57 mm)  
thick door. For GX1A51 or GX1A70.

**TLA93110**  
Longer spindle and screw kit for 2<sup>1</sup>/<sub>4</sub>" (57 mm)  
thick door. For GX1A60.

