



- Certifications**
- Conforms to ANSI/BHMA A156.36, Grade 2
 - cULus listed, 3hr fire-rating
 - 5 Year limited warranty

- Door Thickness**
- 1 $\frac{3}{8}$ –2" (35–51 mm)

- Handing**
- Non handed

- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available

- Spring Latch**
- Solid brass deadlatch
 - $\frac{5}{8}$ " (15.9mm) throw

- Faceplate**
- Mortise type, square corners
 - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (29x57 mm)
 - Self-adjustable for bevelled doors

- Strikes**
- T-type strike, 1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (29x70 mm)
 - Wood frame security plate with 3" (76 mm) wood screws
 - Plastic dust-box

- Chassis**
- Die-cast trim ring
 - Free-spinning solid brass cylinder collar
 - High-strength steel cylinder housing
 - Through bolt mounted
 - Exposed mounting screws

- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)

- Cylinder**
- Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () Special order.*

- Functions** 51 Single cylinder, thumb-turn

- Finish** 26D–Satin chrome


Other finishes available by special order

DG2	AN	51	–	26D
SERIES		FUNCTION		FINISH

SELECTION GUIDE

SERIES	FUNCTION ¹	FINISH ¹	/CASE
DG2	51 Single cylinder, thumb-turn	26D	20

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED
 • KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

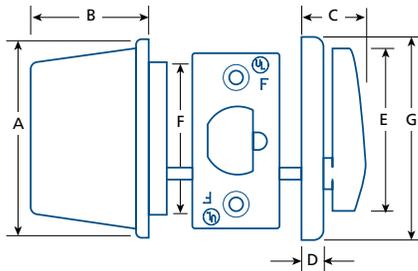

	A	B	C	D	E	F	G
DG2	2 ⁵ / ₈ (67)	1 ⁹ / ₃₂ (32.5)	1 ⁵ / ₁₆ (24)	9 ³ / ₃₂ (7)	1 ³ / ₄ (44.5)	2 (51)	2 ⁵ / ₈ (67)

IN (MM)

PARTS & ACCESSORIES



DGPL238
 Deadlatch: 2³/₈" (60 mm) backset,
 1¹/₈ x 2¹/₄" (28.5 x 57 mm) faceplate

