



- Certifications**
- Certified ANSI/BHMA A156.3, Grade 1
 - cULus listed, Panic Exit
 - cULus listed, up to 3hr Fire Exit
 - Meets ADA/ANSI A117.1 for accessible operation
 - Meets California Building Code Sec. 11B-309.4
 - 10 Year limited warranty

- Rail Assembly**
- Steel rail assembly
 - Stainless steel assembly (32D finish)
 - Field sizable
 - Panic model convertible to Less Bottom Rod

- Handing**
- Handed, field reversible

- Door Size**
- 30–38x84" (762–965x2134 mm)
 - 36–48x96" (914–1219x2438 mm) – option
- See Selection Guide for details.*

- Door Thickness**
- 1 3/4" (45.5 mm)
 - 2 1/4" (57 mm) – option*
- (*) Requires #9500KB363, see Parts & Accessories*

- Stile Width**
- 4 1/2" (114 mm) minimum
- Measured from door edge*

- Projection**
- 2 1/2" (64 mm) from door surface

- Vertical Rods**
- for 84" (2134 mm) door
 - for 96" (2438 mm) door – option
 - for 126" (3200 mm) panic door – available

- Latches**
- Top: stainless steel, deadlocking
 - Bottom: stainless steel

- Strikes**
- 9500PV Top: steel, standard type #9500AS227
 - 9500PV Bottom: steel, standard type #9500AS221
 - 9500FV/FL Top: steel, standard type #9500AS245
 - 9500FV Bottom: steel, standard type #9500AS233
- Other strikes available*

- Dogging**
- For Panic Exit models only
 - Hex key dogging
 - Cylinder dogging¹ – available
- (1) See 9500 Trims & Accessories*

- Mounting Hardware**
- Machine and wood screws
 - Sex nut & thru-bolts¹ – available
 - Glass bead shim kit – available
- (1) Required for non-reinforced hollow metal doors. Included with Fire Exit models*

- Electrical Options**
- Electric latch retraction – option
 - Alarm kit – available*
 - Request to exit – available*
- (*) Sold separately, see 9500 Trims & Accessories*

- Fire Latch**
- Auxiliary Fire Latch available, #9500AVFL
 - Included with 9500FL (Less Bottom Rod)

- Trims**
- Lever, knob, pull, plate, escutcheon and handleset trims available
- Sold separately, see 9500 Trims & Accessories*

- Finish**
- 19–Matte black, painted; 28–Aluminum, painted; 32D–Satin Stainless Steel
- Other finishes available by special order*


9500PV	37	LHR	–	28
MODEL ¹	SIZE ¹	HAND ²		FINISH

(1) SEE SELECTION GUIDE (2) LHR–LEFT HAND REVERSED, RHR – RIGHT HAND REVERSED

SELECTION GUIDE

MODEL		SIZE	DOOR SIZE ¹	DOGGING	FINISH	/ CASE
9500PV	Panic Exit Hardware	37	30–38x84 (965–914x2134)	●	19, 28, 32D	4
	Surface Vertical Rod	48	36–48x96 (914–1219x2438)	●	28, 32D	4
9500FV	Fire Exit Hardware ²	37	30–38x84 (965–914x2134)	—	19, 28, 32D	4
	Surface Vertical Rod	48	36–48x96 (914–1219x2438)	—	28, 32D	4
9500FL	Fire Exit Hardware ²	37	30–38x84 (965–914x2134)	—	19, 28, 32D	4
	Less Bottom Rod	48	36–48x96 (914–1219x2438)	—	28, 32D	4

(1) RECOMMENDED DOOR SIZE, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT. (2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE EXIT LABELLED DOORS.

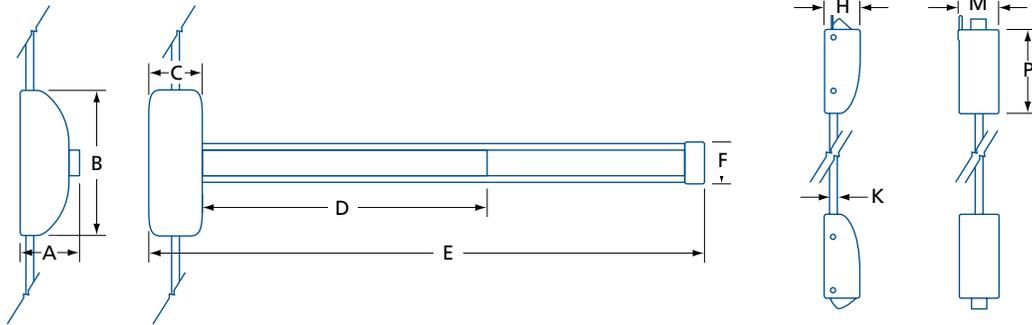

MODEL	A	B	C	D	E ²	F	H	K	M	P
9500PV 37	2 1/2	7 11/16	2 11/16	21 13/16	32 1/2	2 1/8	2	∅ 1/2	2 1/8 (54)	3 15/16
9500FV / FL ¹ 37	(64)	(196)	(68)	(554)	(825)	(54)	(51)	(12.7)	2 5/8 (67)	100
9500PV 48	2 1/2	7 11/16	2 11/16	27 1/2	44 1/2	2 1/8	2	∅ 1/2	2 1/8 (54)	3 15/16
9500FV / FL ¹ 48	(64)	(196)	(68)	(699)	(1130)	(54)	(51)	(12.7)	2 5/8 (67)	100

IN(MM) (1) 9500FL MODEL DOES NOT INCLUDE BOTTOM ROD AND BOTTOM LATCH (2) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

PARTS & COMPONENTS

See 9500 Trims & Accessories for additional items.



9500ACPV
Main chassis cover for 9500PV.



9500ACFV
Main chassis cover for 9500FV / FL.

9500AVFB
Bottom latch case for 9500FV.

9500AVFT
Top latch case for 9500FV / FL

9500AVPB
Bottom latch case for 9500PV.

9500AVPT
Top latch case for 9500PV.



9500AT96
Top rod for 84 to 96" (2134-2438mm) tall door.

9500AT126
Top rod for non-fire 96 to 126" (2438-3200mm) tall door.

9500ABR
Replacement bottom rod.

9500AG
Replacement vertical rod guide.



9500KG406
Glass bead shim kit for 9500PV exit device.

9500KG412
Glass bead shim kit for 9500FV / FL exit device.



9500AS221
Bottom strike for 9500PV exit device.



9500AS227
Top strike for 9500PV exit device.



9500AS233
Bottom strike for 9500FV. Includes mounting hardware. Included with 9500FV.



9500AS245
Top strike for 9500FV / FL. Includes shim and mounting hardware.



9500AVFL
Auxiliary fire latch. Includes mounting hardware. Included with 9500FL.



9500KB369
Sex nut thru-bolt kit (14) for 1 3/4" (45.5mm) thick doors. Included with 9500FV / FL.

9500KB375
Sex nut thru-bolt kit (14) for 2 1/4" (57mm) thick doors.

