



- Certifications**
- Certified ANSI/BHMA A156.3, Grade 1
  - cULus listed, up to 3hr Fire Exit<sup>1</sup>
  - Meets ADA/ANSI A117.1 for accessible operation
  - Meets California Building Code Sec. 11B-309.4
  - 10 Year limited warranty

(1) Panic Hardware model available by special order

- Rail Assembly**
- Stainless steel rail assembly
  - Field sizable

- Handing**
- Handed, field reversible

- Door Size**
- 30–38x84" (762–965x2134 mm)
  - 36–48x96" (914–1219 x2438 mm) – option

- Door Thickness**
- 1 3/4" (45 mm)

- Stile Width**
- 4 1/2" (114 mm) minimum
- Measured from door edge*

- Projection**
- 2 9/16" (65 mm) from door surface

- Vertical Rods**
- For 7' (2134 mm) tall doors

- Latchbolts**
- Top: stainless steel, hook type
  - Bottom: stainless steel, pullman type, with 1 9/32" (15 mm) throw<sup>1</sup>

(1) Adjustable for recessed or roller strike

- Strikes**
- Top: recessed, stainless steel
  - Bottom: recessed, stainless steel
  - Optional bottom roller strike (stainless steel) included

- Dogging**
- Not available on FIRE EXIT hardware, only available on PANIC EXIT hardware

- Hardware**
- Machine and anchor bolts

- Electrical Options**
- Electric latch retraction – option
  - Alarm kit – available\*
  - Request to exit kit – available\*

(\* Sold separately, see 9500 Trims & Accessories

- Trims**
- Escutcheon trim – available
- Sold separately, see 9500TECU*

- Finish**
- 32D–Satin Stainless Steel
  - 19–Matte Black

*Other finishes available by special order*


9500FCU	37	LHR	-	32D
MODEL	SIZE <sup>1</sup>	HAND <sup>2</sup>		FINISH

(1) SEE SELECTION GUIDE (2) LHR–LEFT HAND REVERSED, RHR – RIGHT HAND REVERSED

## SELECTION GUIDE

MODEL	SIZE	DOOR SIZE <sup>1</sup>	DOGGING	FINISH	/CASE
9500FCU Fire Exit Hardware <sup>2</sup> Concealed Vertical Rod	37	30-38x84 (762-965x2134)	—	19, 32D	4
	48*	36-48x96 (914-1219x2438)	—	19, 32D	4

(1) RECOMMENDED DOOR SIZE, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT. (2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE EXIT LABELLED DOORS.  
(\*) SPECIAL ORDER—PLEASE CONTACT

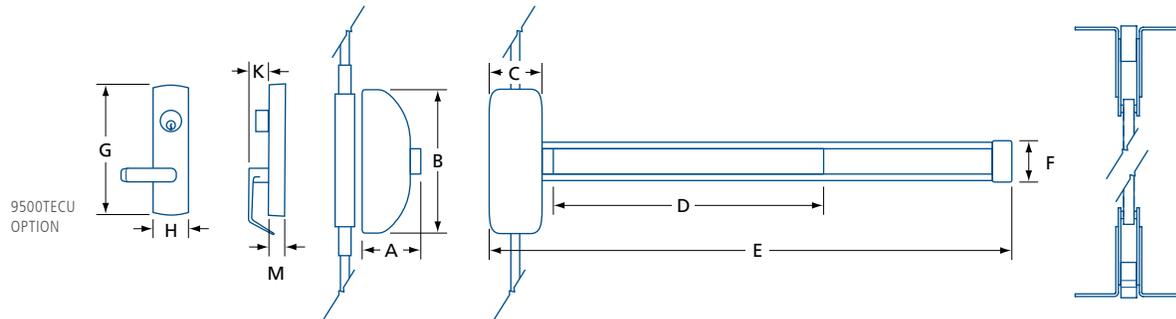

MODEL	A	B	C	D	E <sup>1</sup>	F	G	H	K	M
9500FCU 37	2 <sup>9</sup> / <sub>16</sub> (65)	8 <sup>11</sup> / <sub>16</sub> (220)	2 <sup>5</sup> / <sub>8</sub> (67)	21 <sup>1</sup> / <sub>4</sub> (540)	32 <sup>11</sup> / <sub>16</sub> (830)	2 <sup>3</sup> / <sub>8</sub> (59)	10 <sup>7</sup> / <sub>16</sub> (265)	2 <sup>11</sup> / <sub>16</sub> (68.2)	2 <sup>3</sup> / <sub>8</sub> (60)	3 <sup>3</sup> / <sub>4</sub> (19.5)
9500FCU 48				27 <sup>1</sup> / <sub>2</sub> (698)	44 <sup>11</sup> / <sub>16</sub> (1135)					

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

## 9500TECU ESCUTCHEON TRIM



Trim	9500TECU 70	9500TECU 80
Function	Classroom ↔	Storeroom ↔
Finish	26D	19*, 26D
Lever	Standard return	Standard return
Cylinder <sup>1</sup>	Mortise	Mortise
Door Thickness	1 <sup>3</sup> / <sub>4</sub> (44.5)	1 <sup>3</sup> / <sub>4</sub> (44.5)
Warranty	1 Year limited	1 Year limited

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, 1-1/4IN (32MM), SCHLAGE "C", 2 KEYS INCLUDED – KEYING SERVICES AVAILABLE (\*) SPECIAL ORDER – PLEASE CONTACT.

## PARTS & COMPONENTS

See 9500 Trims & Accessories for additional items.

