



- Certifications**
- Conforms to ANSI/BHMA A156.3, Grade 2
 - cULus listed, Panic Exit
 - cULus listed, up to 90 min. Fire Exit
 - 1 Year limited warranty

- Rail Assembly**
- Steel rail assembly
 - Stainless steel assembly (C32D finish)
 - Field sizable

- Handing**
- Non-handed

- Door Width**
- 30–38" (762–965 mm)
 - 36–48" (914–1219 mm) – option
- See Selection Guide for details*

- Door Height**
- up to 96" (2438 mm)
 - 8500F maximum: 84" (2134 mm)
- See Selection Guide for details*

- Door Thickness**
- 1 3/4" (45.5 mm)

- Stile Width**
- 4" (106.1 mm) minimum
- Measured from door edge*

- Projection**
- 2 9/16" (65 mm) from door surface

- Latchbolt**
- Stainless steel, 3/4" (19 mm) throw
 - Deadlatch

- Strike**
- Cast iron, standard type #8000S
- Other strikes available*

- Dogging**
- For Panic Exit models only
 - Hex key dogging

- Hardware**
- Machine and wood screws
 - Sex nuts & thru-bolts¹ – available
- (1) Required for non-reinforced hollow metal doors, included with Fire Exit models*

Electrical Options

- Trims**
- Lever, knob, pull, and handleset trims available
- Sold separately, see 8500 Trims & Accessories*

- Finish**
- C19–Matte black; C28–Aluminum, painted; C3–Polished brass; C32D–Satin stainless steel
- Other finishes available by special order*


8500	C32D	–	48
MODEL ¹	FINISH		OPTION ²

(1) SEE SELECTION GUIDE (2) 48: FOR NON-FIRE DOORS 36-48 IN (914-1219MM) WIDE

SELECTION GUIDE

MODEL		DOOR WIDTH	DOOR HEIGHT	DOGGING	FINISH	/CASE
8500	Panic Exit Hardware, Rim device	30–38 ¹ (762–965)	96 ¹ (2438)	•	C19, C28, C3, C32D	4
8500 -48		36–48 ¹ (914–1219)	96 ¹ (2438)	•	C19, C28, C32D	4
8500F	Fire Exit Hardware ² Rim device	30–36 ^{MAX} (762–914)	84 ^{MAX} (2134)	—	C19, C28, C3, C32D	4

IN (MM) (1) RECOMMENDED DOOR SIZE FOR PANIC INSTALLATIONS, UP TO 8FT (244 CM) TALL.
(2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE EXIT LABELLED DOORS NO MORE THAN 7FT (213CM) TALL AND 36IN (914MM) WIDE.

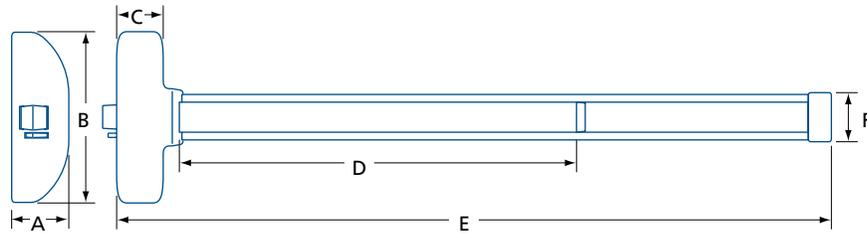

MODEL	A	B	C	D	E ¹	F
8500 / 8500F	2 ⁹ / ₁₆ (65)	7 ¹¹ / ₁₆ (195)	2 (50.8)	20 ¹ / ₄ (514)	33 ¹ / ₄ (845)	1 ¹⁵ / ₁₆ (50)
8500 -48				30 (762)	45 ⁵ / ₁₆ (1150)	

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

PARTS & COMPONENTS

See 8500 Trims & Accessories for additional items.



8000S
Regular ¹²/₃₂" (16.5 mm) cast iron strike for panic and fire rim device.

8000S-L
Low-profile ¹⁵/₃₂" (12 mm) cast iron strike for panic rim device. Includes ⁵/₆₄" (2 mm) shims.



8000DDS
Overlapping cast iron strike for double doors and paired panic exit devices only.

