



- Certifications**
- cULus listed, 3hr fire-rating
 - ADA compliant, barrier free
 - 5 Year limited warranty

- Power Size**
- Adjustable size 1–5 (preset 3)
- See selection guide for details*

- Body Material**
- Cast aluminum body, painted finish

- Mechanism**
- Hydraulic rack and pinion operation

- Fluid**
- Non-gumming, non-freezing hydraulic fluid
 - Operating range of -39° to 49°C (-38° to 120°F)

- Adjustments**
- Sweep speed adjustment valve
 - Latching speed adjustment valve
 - Cushioning backcheck adjustment valve

- Cover**
- Plastic pinion cap, painted finish

- Handing**
- Non-handed

- Opening**
- 180° maximum

- Mounting**
- Tri-Pack: regular¹, top jamb¹, parallel arm²
 - Maximum reveal: 2½" (64.5 mm)

*(1) Arm shoe allows ±7.5% power adjustment
(2) May reduce spring power efficiency by 25%*

- Hardware**
- Wood screws & self-tapping machine screws
 - Sex-nut & thru-bolts

- Available Arms**
- Regular arm

- Finish**
- AL–Aluminum, painted; DU–Dark bronze, painted

Other finishes available by special order


1761 – AL
MODEL FINISH

SEE SELECTION GUIDE FOR DETAILS

SELECTION GUIDE

MODEL		POWER SIZE	WEIGHT CAPACITY ¹	MAX. DOOR WIDTH ²		BACKCHECK	DELAYED ACTION	FINISH	/CASE
				INTERIOR	EXTERIOR				
1761		1-5	265 (120)	48 (1219)	42 (1067)	•	—	AL, DU	10

CAUTION: ANY DOOR CLOSER INSTALLED AND ADJUSTED BASED ON ADA REDUCED FORCE REQUIREMENTS MAY NOT RELIABLY CLOSE AND LATCH DOOR.
 (1) WEIGHT CAPACITY RANGE IN POUNDS (KILOGRAMS) (2) MAXIMUM DOOR WIDTH IN INCHES (MILLIMETRES)

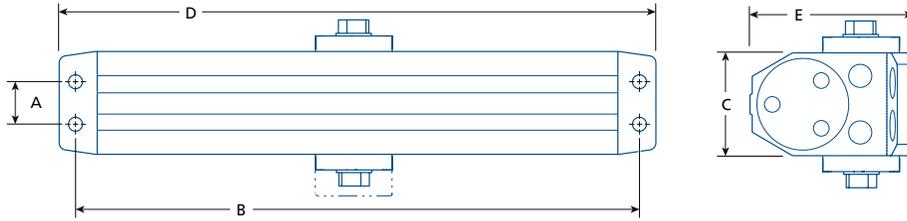

MODEL	A	B	C	D	E
1761	$\frac{3}{4}$ (19)	$9\frac{1}{16}$ (230)	$1\frac{13}{16}$ (46)	$9\frac{9}{16}$ (244.6)	$2\frac{13}{16}$ (71)

IN (MM)

