

- Standard weight, full mortise
- 3 knuckle, 2 anti-friction nylon bearings
- Steel with steel components
- ANSI/BHMA A156.7 template hole pattern
- cULus listed *

- Non-handed
- Adjustable spring tension (tool included)
- Wood and/or undercut machine screws included

OPTIONS

3311: Radius corners: 1/4" (6.4 mm)

NOTE: For best results, use with DOREX PRO ball bearing hinges of the same size.

(*) Minimum of two (2) 3310 hinges per fire-rated door




3310	C15	454
MODEL	FINISH	SIZE

SIZE	INCHES	MM	GAUGE	HOLES	SCREWS INCLUDED MACHINE	WOOD	QTY ¹
3535	3 1/2 x 3 1/2	88.9 x 88.9	0.125	6	—	#9 x 3/4	2 / 40
44	4 x 4	101.6 x 101.6	0.125	8	—	#9 x 3/4	2 / 40
44	4 x 4 (RC)	101.6 x 101.6 (RC)	0.125	8	—	#10 x 3/4	2 / 40
454	4 1/2 x 4	114.3 x 101.6	0.134	8	#12-24 x 1/2	#12 x 1 1/4	2 / 40

(1) 2/40 : QUANTITY PER BOX / QUANTITY PER CASE. HINGES NOT SOLD INDIVIDUALLY. (RC) RADIUS CORNERS

C15	C26D	C3	C3M	C5
SATIN NICKEL	SATIN CHROME	POLISHED BRASS	MIRROR POLISH BRASS	ANTIQUE BRASS

OTHER FINISHES AVAILABLE, MAY REQUIRE SPECIAL ORDER AND/OR ADDITIONAL LEAD TIME.

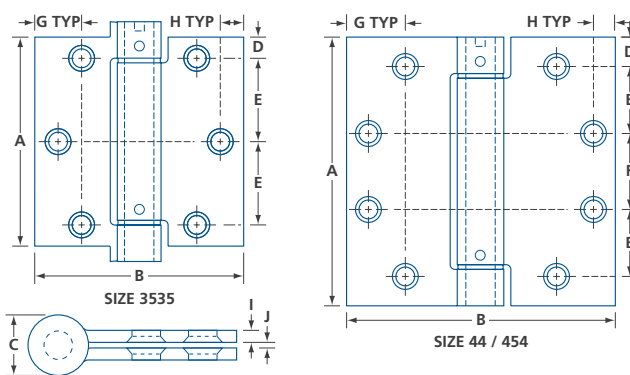

SIZE	MAXIMUM DOOR WT. ¹	SPRING HINGES	BUTT HINGES ²
3535	50 (22.7 kg)	1	2
	70 (31.8 kg)	2	1
	90 (40.9)	3	—
44	60 (27.2)	1	2
	85 (38.6)	2	1
	100 (45.5)	3	—
454	70 (31.8)	1	2
	90 (40.9)	2	1
	120 (54.5)	3	—

(1) LB(KG) MAXIMUM SIZE: 48 X 90" (1219 X 2286 MM).
MAX. FIRE DOOR SIZE: 36 X 84" (914 X 2134 MM).

(2) FOR BEST RESULTS, USE DOREX PRO 179 HINGES.

MODEL	A	B	C	D	E	F	G	H	K
3310 3535	3 1/2 (88.9)	3 1/2 (88.9)	1/2 (12.7)	23/64 (9.1)	1 25/64 (35.4)	—	11/16 (17.5)	23/64 (9.1)	1/16 (1.6)
3310/11 44	4 (101.6)	4 (101.6)	9/16 (14)	1/2 (12.7)	1 (25.5)	31/32 (24.6)	3/4 (19.1)	3/8 (9.5)	1/16 (1.6)
3310 454	4 1/2 (114.3)	4 (101.6)	19/32 (15.2)	1/2 (12.7)	1 1/8 (28.6)	1 15/64 (31)	1 (25.4)	3/8 (9.5)	1/16 (1.6)

DIMENSIONS IN INCHES (MILLIMETRES) AS PER ANSI A156.7