


CONTINUOUS GEARED HINGES

FULL SURFACE

ABH FULL SURFACE ALUMINUM GEARED HINGES (SWING CLEAR)

ABH-A210HD

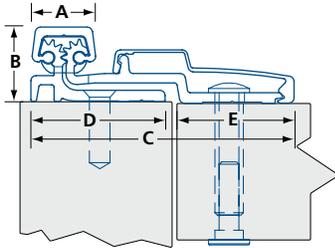

- Certified ANSI/BHMA A156.26, Grade 1
- cULus fire rated, 90/60 min.*
- Full surface, heavy duty
- Swing clear application
- No door inset, flush mount
- 48" (1219mm) door width maximum
- 450 lbs (204 kg) door weight maximum
- Undercut Tek screws and sex-nut bolts included

STANDARD LENGTHS

Inch: 79 / 83 / 85 / 95 / 120
MM: 2006 / 2108 / 2159 / 2413 / 3048

FINISHES

B–Black anodized
C–Clear anodized
D–Dark bronze anodized

*Metal door / wood door

Available in a variety of finishes, models, options, and lengths. Please contact us to order. Visit www.abhmfg.com for product or warranty details (coverage may vary by country).


ABH-A210	HD	C	083
MODEL	TYPE	FINISH	LENGTH

MODEL	A	B	C	D	E	CAPACITY ¹
ABH-A210HD	$\frac{25}{32}$ (19.8)	$\frac{29}{32}$ (23)	$3 \frac{5}{32}$ (80.6)	$1 \frac{5}{8}$ (41.3)	$1 \frac{35}{64}$ (39.3)	450 (204)

(1) LBS (KG) OTHER HIGH CAPACITY MODELS AVAILABLE

ABH FULL SURFACE ALUMINUM GEARED HINGES - CENTER PIVOT

ABH-A570HD

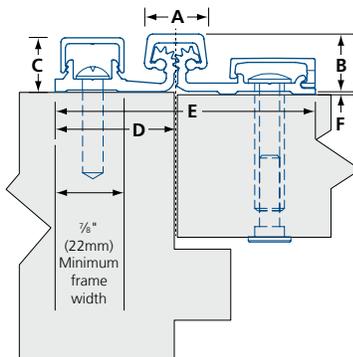

- Certified ANSI/BHMA A156.26, Grade 1
- cULus fire rated, 90/60 min.*
- Full surface, heavy duty
- For narrow-faced frames, $\frac{7}{8}$ " (22mm) minimum frame width
- $\frac{1}{16}$ " (1.6 mm) door inset
- 48" (1219 mm) door width maximum
- 450 lbs (204 kg) door weight maximum
- Undercut Tek screws and sex-nut bolts included

STANDARD LENGTHS

Inch: 79 / 83 / 85 / 95 / 120
MM: 2006 / 2108 / 2159 / 2413 / 3048

FINISHES

B–Black anodized
C–Clear anodized
D–Dark bronze anodized

*Metal door / wood door

Available in a variety of finishes, models, options, and lengths. Please contact us to order. Visit www.abhmfg.com for product or warranty details (coverage may vary by country).

ABH-A570	HD	C	083
MODEL	TYPE	FINISH	LENGTH

MODEL	A	B	C	D	E ¹	F	CAPACITY ²
ABH-A570HD	$\frac{23}{32}$ (18.3)	$\frac{23}{32}$ (18.3)	$2 \frac{1}{32}$ (16.7)	$1 \frac{15}{32}$ (37.3)	$3 \frac{3}{16}$ (81)	$\frac{1}{16}$ (1.6)	450 (204)

IN(MM) (1) DOOR INSET (2) LBS (KG)

