

DOOR PULLS

GENERAL HARDWARE

DOREX 19R-E SERIES

LADDER PULLS, ROUND, 1 1/4" DIAMETER



1 1/4"
32 mm
Diameter (E)



Single pulls are thru-bolt mounted with round end-caps

APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16–1/2" (8–13 mm) thick

FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Matching washers for different finishes included
- Packaged in an eco-friendly, fully recyclable, box



630
SATIN STAINLESS
STEEL




19
MATTE BLACK

SELECTION GUIDE

SERIES	LENGTH [†]	DIAMETER	TYPE	FINISH	DESCRIPTION
19R	24	E	B	630	Ladder Pull, 1 1/4" (32 mm) Round, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	12, 24, 36 48, 60, 72	E 1-1/4 (32)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), (†) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.

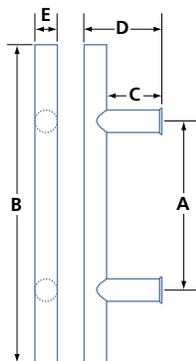

DIMENSIONS

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
19R12	12 (305)	24 (610)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
19R24	24 (610)	36 (915)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
19R36	36 (915)	48 (1220)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
19R48	48 (1220)	60 (1524)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
19R60	60 (1524)	72 (1829)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)
19R72	72 (1829)	84 (2134)	2 7/16 (62)	3 11/16 (94)	1 1/4 (32)

IN (MM)