

DOOR PULLS

GENERAL HARDWARE

DOREX 19R-E45 SERIES

LADDER PULLS, ROUND, 1 1/4" DIAMETER, OFFSET POSTS



APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16–1/2" (8–13 mm) thick

FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Pull is offset for better functionality and aesthetics
- Simplified Stock Management: Convert back-to-back pairs to singles, and vice-versa (kit sold separately)
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Matching washers for different finishes included
- Offset clearance 2 25/32" (70.6 mm)



SELECTION GUIDE

SERIES	LENGTH†	DIAMETER	TYPE	OPTION	FINISH	DESCRIPTION
19R	24	E	B	45	630	Ladder Pull, 1 1/4" (32 mm) Round, 24" Center-to-Center, Back-to-Back, 45°, Satin Stainless Steel
	12, 24, 36 48, 60, 72	E 1-1/4 (32)	B Back-to-Back S Single	45 45 Degree	630 Satin Stainless Steel 19 Matte black	

IN (MM), †) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.




Single pulls are thru-bolt mounted with round end-caps

ACCESSORIES

19R45-B2B2SING-KIT-630	Kit to Reconfigure 1x 19R45-B2B PAIR to 2x 19R45-SINGLE-630
19R45-B2B2SING-KIT-19	Kit to Reconfigure 1x 19R45-B2B PAIR to 2x 19R45-SINGLE-19
19R45-2SING2B2B-KIT-630	Kit to Reconfigure 2x 19R45-SINGLE to 1x 19R45-B2B PAIR-630
19R45-2SING2B2B-KIT-19	Kit to Reconfigure 2x 19R45-SINGLE to 1x 19R45-B2B PAIR-19

DIMENSIONS

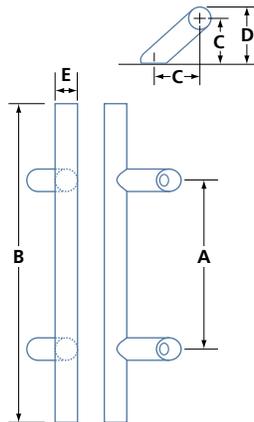

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E DIAMETER
19R12	12 (305)	24 (610)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
19R24	24 (610)	36 (915)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
19R36	36 (915)	48 (1220)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
19R48	48 (1220)	60 (1524)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
19R60	60 (1524)	72 (1829)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)
19R72	72 (1829)	84 (2134)	2 25/32 (70.6)	3 13/32 (86.6)	1 1/4 (32)

IN (MM)

