

DOOR PULLS

GENERAL HARDWARE

DOREX 20T-E SERIES

OFFSET RECTANGULAR D-PULLS, MITERED, 1 1/4" x 3/4" DIAMETER



APPLICATIONS

- For wood or metal doors 1 3/8–2 1/4" (35–57 mm) thick
- For glass doors 5/16–1/2" (8–13 mm) thick

FEATURES

- 304 Stainless steel
- Available in paired or single pulls
- Single pulls are thru-bolt mounted with round end-caps
- All necessary mounting hardware included
- Can be installed on 2" (51 mm) aluminum doors and frame with 1/2" (12.7 mm) door stop
- Packaged in an eco-friendly, fully recyclable, box



Single pulls are thru-bolt mounted with round end-caps


SELECTION GUIDE

SERIES	LENGTH†	DIMENSION	TYPE	FINISH	DESCRIPTION
20T	24	E	B	630	Offset Rectangular D-Pull, 1 1/4 x 3/4" (32 x 19 mm) Mitered, 24" Center-to-Center, Back-to-Back, Satin Stainless Steel
	10, 24, 36 48, 60	E 1-1/4 x 3/4 (32 x 19)	B Back-to-Back S Single	630 Satin Stainless Steel 19 Matte black	

IN (MM), (†) CENTER-TO-CENTER.

NOT ALL COMBINATIONS OF STANDARD LENGTHS, TYPES & FINISHES ARE STOCKED. PLEASE REFER TO PRICE LIST OR CONTACT CANAROPA SALES AND SERVICE FOR DETAILS.

DIMENSIONS

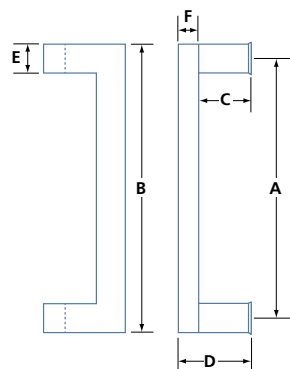

MODEL	A CENTER-TO-CENTER	B TOTAL LENGTH	C POSTS	D PROJECTION	E GRIP WIDTH	F GRIP HEIGHT
20T10	10 (254)	11 1/4 (286)	2 1/16 (68)	3 7/16 (87)	1 1/4 (32)	3/4 (19)
20T24	24 (609.6)	25 1/4 (641)	2 1/16 (68)	3 7/16 (87)	1 1/4 (32)	3/4 (19)
20T36	36 (914.4)	37 1/4 (946)	2 1/16 (68)	3 7/16 (87)	1 1/4 (32)	3/4 (19)
20T48	48 (1219.2)	49 1/4 (1251)	2 1/16 (68)	3 7/16 (87)	1 1/4 (32)	3/4 (19)
20T60	60 (1524)	61 1/4 (1556)	2 1/16 (68)	3 7/16 (87)	1 1/4 (32)	3/4 (19)

IN (MM)