

# DOOR ASTRAGAL


GENERAL HARDWARE

DOREX T-ASTRAGAL

DGS-AA158



- cULus listed (UL10C)
  - » Metal fire door: 3 hrs
- Surface mounted on the beveled door edge of the active door of paired doors
- Provides a general-purpose weather seal
- Extruded aluminum profile
- Eco-friendly, bio-based gasket
- Can be cut to required length
- Includes screws for wood and metal door frames
- Door coordinator may be required when using two active doors
- Temperature range -5 to 60°C (-23 to 140°F)

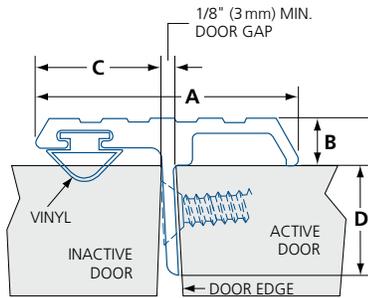

MODEL	FINISH	A	B	C	D	LENGTH
DGS-AA158V-7	Mill Aluminum	1 <sup>3</sup> / <sub>8</sub> (35)	1/4 (6.4)	2 <sup>1</sup> / <sub>32</sub> (16.8)	9/16 (14.5)	84 (2134)

IN(MM)