


20-4030-REV1 BY-PASS HARDWARE - INSTALLATION INSTRUCTIONS



- 2 hangers per panel
- Load capacity: Maximum 30kg (66lbs) per door panel
- Adjustment for height and leveling of panel of up to 3/16"


- Tracks must be installed on a level surface or ceiling
- Tracks are pre-drilled approximately every 300 mm (12")

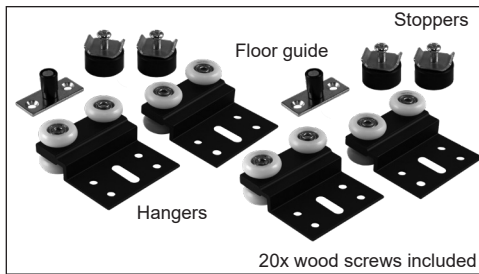


- Tracks must be installed and secured onto wood stud or header suitable for door weight.

- Use appropriate mounting screws for track installation.
- Door must be properly prepared.


A Verify opening and panel sizes




B Cut track to required length. Insert hangers and stoppers as shown (do not tighten stoppers) and install track (Track sold separately. Track must be leveled within 1/8")

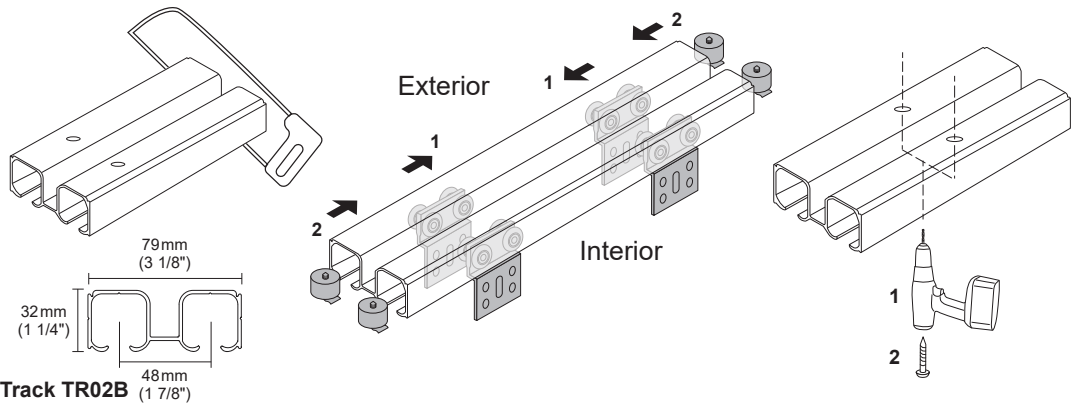

C Installation and adjustment of panels

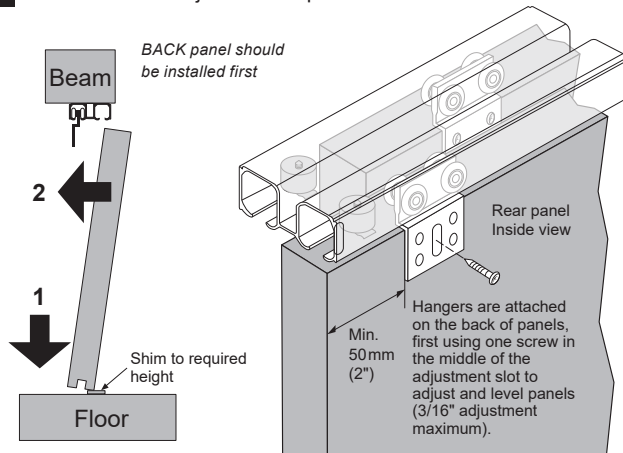


D Installation of panel

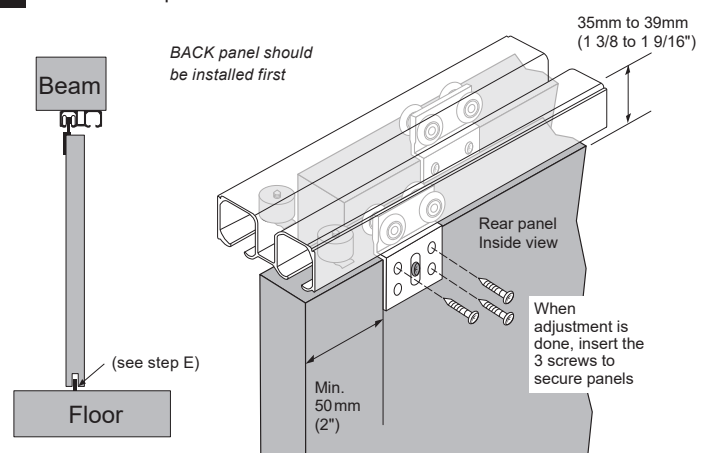


E Position and install floor guide


(First remove the shim, ensure floor guide remains engaged with door when sliding open and closed)

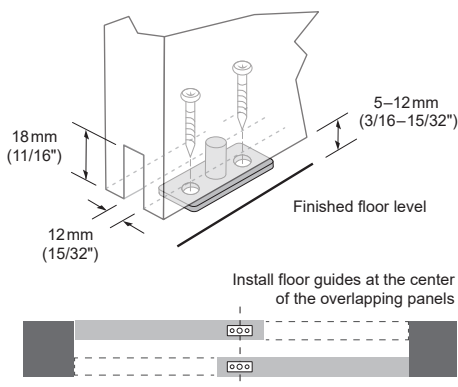


When using 21-1025-FG Floor guide, shim doors to min. 7mm high (Not included with kit 20-4030-REV1)

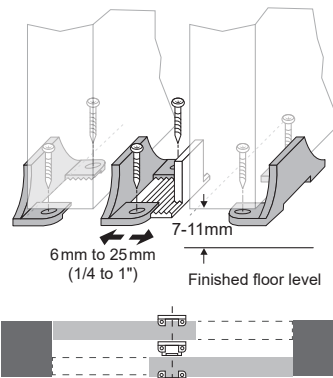

F Position the stoppers and secure stoppers in place.

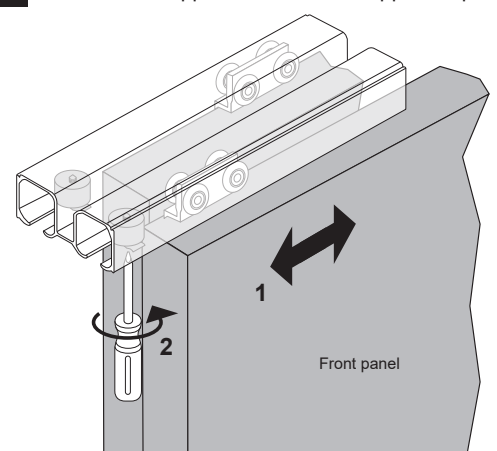

20-4030-REV1 SYSTÈME DOUBLE PASSAGE - INSTRUCTIONS D'INSTALLATION

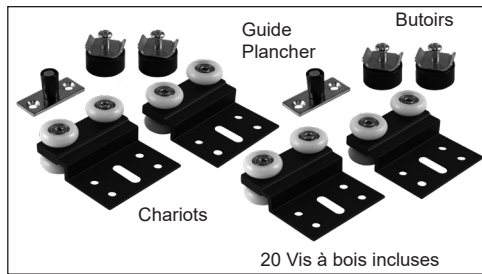


- 2 chariots par panneau
- Capacité: Maximum 30kg (66lbs) par panneau
- Réglage de la hauteur et de la mise à niveau du panneau jusqu'à 3/16"
- Les rails doivent être installés sur un mur ou plafond de niveau
- Les rails sont pré-perçés environ à tous les 300 mm (12")




- Les rails doivent être fixés et sécurisés à la charpente de bois et convenir au poids de la porte.
- Utilisez les vis appropriées pour le type d'installation.
- Les portes doivent être correctement préparées.


A Vérifiez la taille de l'ouverture et de les panneaux.




B Coupez le rail à la longueur désiré, insérez chariots et butoirs comme illustré (ne pas serrer) et installez le rail (Rail fournis séparément. Le rail doit être nivelée à 1/8" près.)

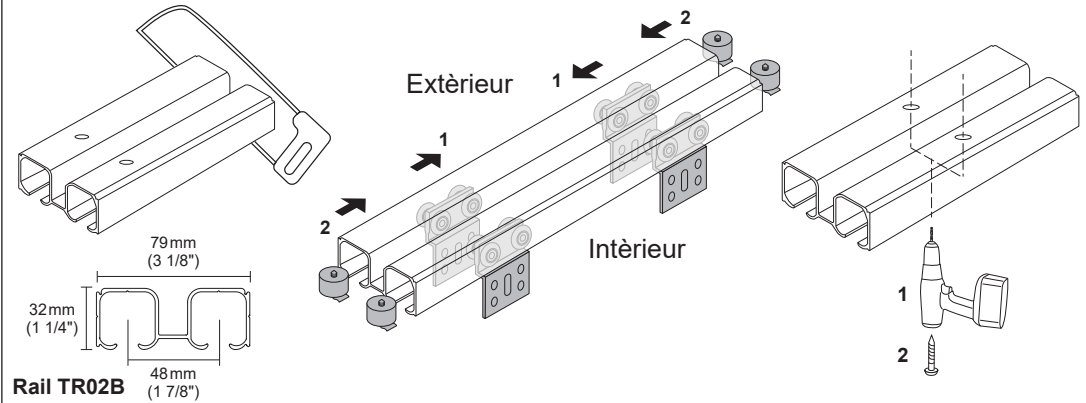

C Installation et ajustement des panneaux

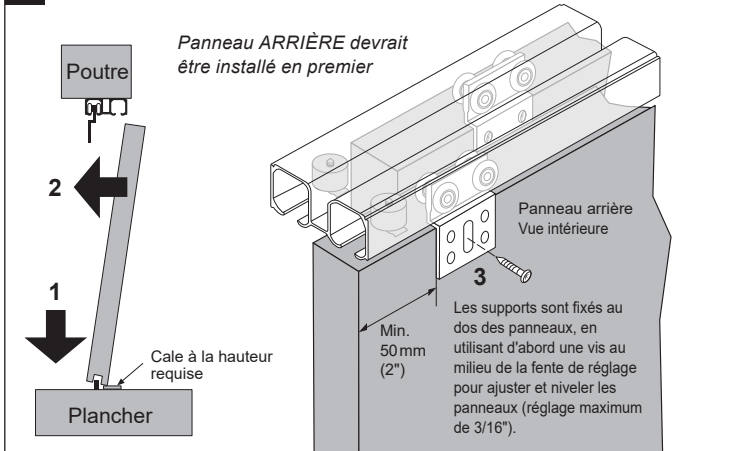


D Installation des panneaux

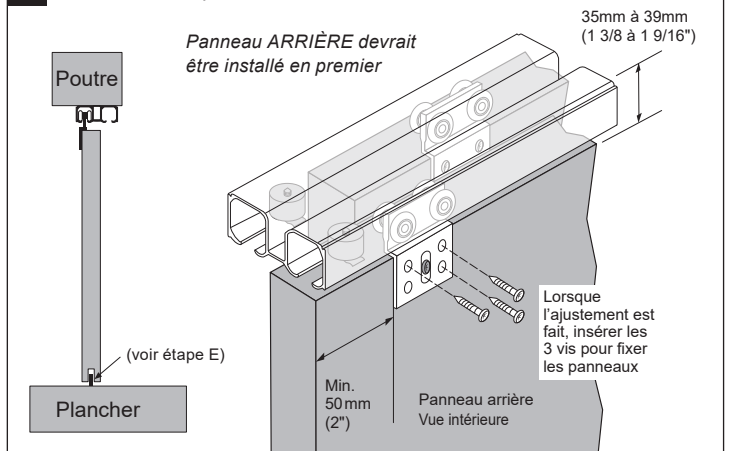


E Positionnez et fixez le guide de porte

(Tout d'abord retirer la cale ensuite assurez-vous que le guide de porte s'engage à la porte en position ouverte et fermée)

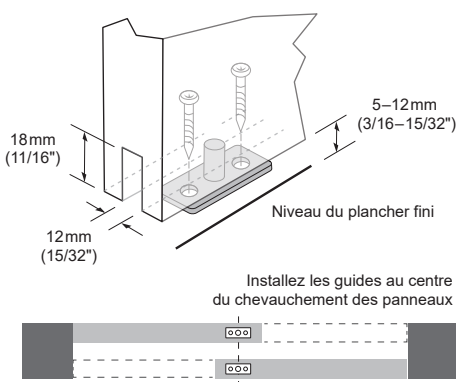

En cas d'utilisation du guide de plancher 21-1025-FG, insérer un cale sous la portes à une hauteur minimale de 7 mm. (Non inclus dans le kit 20-4030-REV1)

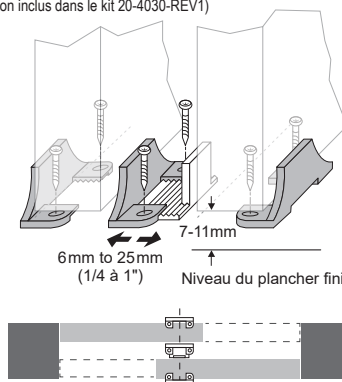

F Positionnez les butoirs et fixez en place.

