



LEFT HAND REVERSE MODEL SHOWN

- Certifications**
- Conforms to ANSI/BHMA A156.3, Grade 2
 - cUL listed, Panic Exit
 - 1 Year limited warranty

Handing • Handed, reversible

Door Thickness • 1 3/4" (45.5 mm)

Stile Width • 4 3/4" (121 mm) minimum
Measured from door edge

Projection • 4 3/4" (121 mm) from door surface

Latchbolt • Solid brass, 3/4" (19 mm)

Crossbar

- Field sizable
- 38" (965 mm) steel tube
- 48" (1219 mm) steel tube – available

Strike • Steel, standard type (NHT10)

Dogging • Hex key dogging

Hardware • Wood and machine screws

Functions

- 1 Exit only, no trim
- 3 Passage with pull trim
- 4 Night latch with pull trim*
- 5 Entrance with thumbpiece trim*

(*) Keyed functions use standard rim cylinder, sold separately

Finish Aluminum

Other finishes available by special order


NH900	-3
MODEL	FUNCTION ¹

(1) SEE SELECTION GUIDE FOR DETAILS **PLEASE INDICATE REQUIRED HANDING WHEN ORDERING

SELECTION GUIDE

MODEL	FUNCTION	DOGGING	FINISH	/CASE	
NH900-1	Exit only, no exterior trim.	#1	●	Aluminum	12
NH900-3	Passage with pull trim. Latch always free.	#3	●	Aluminum	6
NH900-4	(Night Latch) Entrance with pull trim. Always locked. Latch operated by exterior rim cylinder.*	#4	●	Aluminum	6
NH900-5	Entrance with thumbpiece trim. Latch operated by thumbpiece, unless locked by exterior rim cylinder.*	#5	●	Aluminum	6

(*) RIM CYLINDER NOT INCLUDED, SOLD SEPARATELY. CBR114 OR MR118 RIM CYLINDERS RECOMMENDED.

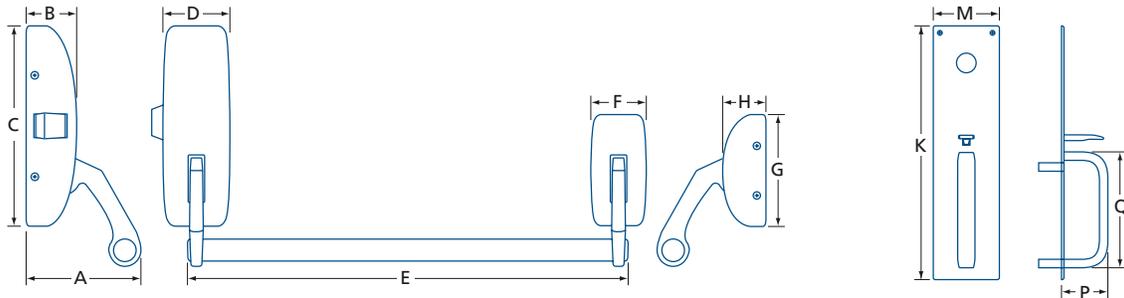

MODEL	A	B	C	D	E ¹	F	G	H	K	M	P	Q
NH900-1	4¾	2⅛	8½	2⅞	38	2¾	4⅝	2	—	—	—	—
NH900-3/4/5	(121)	(54)	(216)	(68)	(965)	(55)	(117)	(51)	16 (406)	3½ (89)	2⅞ (52)	7½ (190)

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

PARTS & COMPONENTS



NH911
Crossbar end cap with screw.



NH912
Conversion kit, function #1 to #5.

NH913
Conversion kit, function #1 to #4.



NH914
Exterior pull trim, function #4.
Included with NH900-4.

NH915
Exterior thumbpiece trim, function #5.
Included with NH900-5.



NH926
38" (965mm) steel crossbar tube, chrome

NH926-48
48" (1219mm) steel crossbar tube, chrome



NHST10
Standard strike for panic rim device.



NHST11
Overlapping strike for double doors without mullion. See instructions for details.



NH990
Dogging screw

NH995
Coil spring for bar levers

NH998
Latch spring



SEE PAGE 05.410
FOR DETAILS

CBR114-SCKD
6-pin, brass rim cylinder with aluminum clad face. 1¼" (32 mm) long with 2⅞" (62 mm) tailpiece. Schlage keyway.

MR118-SCKD6
6-pin, brass rim cylinder with aluminum clad face. 1⅝" (28.6 mm) long with 2⅞" (62 mm) tailpiece. Schlage keyway.

