



- Certifications**
- cULus listed, 3hr fire-rating
 - 5 Year limited warranty

- Power Size**
- Fixed power size 1, 2, 3, 4 or 5
- See selection guide for details*

- Body Material**
- Cast aluminum alloy, painted finish

- Mechanism**
- Hydraulic rack and pinion

- Fluid**
- Non-gumming, non-freezing hydraulic fluid
 - Operating range of -15° to 40°C (5° to 104°F)

- Adjustments**
- Sweep speed valve
 - Latching speed valve
 - Cushioning backcheck valve – option

- Cover**
- Plastic pinion cap, painted finish

- Handing**
- Non-handed

- Opening**
- 180° maximum

- Mounting**
- Tri-Pack: regular¹, top jamb¹, parallel arm²
 - Maximum reveal: 3" (76 mm)
 - Drop plates – available

(1) Arm shoe allows ±7.5% power adjustment

(2) May reduce spring power efficiency by 25%

- Hardware**
- Wood & machine screws
 - Sex nuts & thru-bolts – available

- Available Arms**
- Regular arm

- Finish**
- AL–Aluminum, painted; BP–Brass, painted; DU–Dark bronze, painted

Other finishes available by special order


754	AL
MODEL	FINISH

SEE SELECTION GUIDE FOR DETAILS

SELECTION GUIDE

MODEL	POWER SIZE	WEIGHT CAPACITY ¹	MAX. DOOR WIDTH ²		BACKCHECK	DELAYED ACTION	FINISH	/CASE
			INTERIOR	EXTERIOR				
751	1	33–80 (15–36)	32 (813)	—	—	—	AL, BP, DU	10
752	2	55–100 (25–45)	36 (914)	—	—	—	AL, BP, DU	10
753	3	90–145 (40–66)	44 (1118)	—	—	—	AL, BP, DU	10
783					•	—	AL	10
754	4	125–190 (57–86)	48 (1219)	36 (914)	—	—	AL, BP, DU	10
784					•	—	AL, DU	10
755	5	175–265 (80–120)	52 (1321)	44 (1118)	—	—	AL, BP, DU	10
785					•	—	AL, DU	10

CAUTION: ANY DOOR CLOSER INSTALLED AND ADJUSTED BASED ON ADA REDUCED FORCE REQUIREMENTS MAY NOT RELIABLY CLOSE AND LATCH DOOR.
 (1) WEIGHT CAPACITY RANGE IN POUNDS (KILOGRAMS) (2) MAXIMUM DOOR WIDTH IN INCHES (MILLIMETRES)

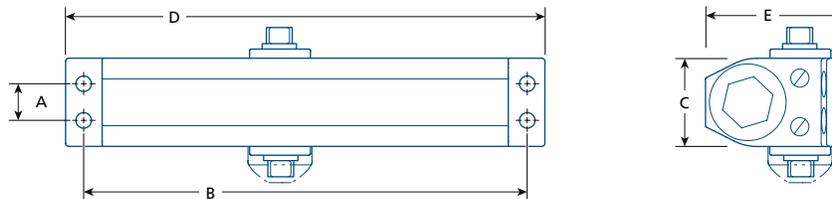

MODEL	A	B	C	D	E
751	¾ (19)	6½ (165)	1 ¹¹ / ₁₆ (43)	7 ¹ / ₈ (181)	2 ⁹ / ₁₆ (65)
752/753 (783)	¾ (19)	8 ³ / ₁₆ (208)	1 ³ / ₄ (45)	8 ⁷ / ₈ (225)	2 ⁷ / ₈ (73)
754/755 (784/785)	¾ (19)	9 ¹ / ₁₆ (230)	1 ³ / ₄ (45)	9 ³ / ₄ (248)	2 ⁷ / ₈ (73)

IN (MM)

PARTS & ACCESSORIES



ARM754
Arm for 752 to 785 door closers.



SNB1420
Aluminum sex nut & steel thru-bolt kit (4) for doors 1³/₄" (44.5 mm) thick.



715
Parallel arm bracket (sizes 1 & 2).



735
Parallel arm bracket (sizes 3, 4 and 5).



DP754
For parallel arm installations where the door top rail height is insufficient for direct mounting (models 754 / 755).



DPN754
Narrow plate for top jamb installations with low ceiling clearance or for regular arm installations where the door top rail height is insufficient for direct mounting.

