

SPECIALTY HINGES

INVISIBLE HINGES

SOSS INVISIBLE HINGES

SOSS



S220
5½" (140mm)

- For wood or metal applications
- Models can accommodate cabinet to full-sized doors
- Hinge cannot be seen or tampered with when closed
- Zinc body with steel pins
- Opens 180°
- Smooth operation
- All hinges include wood screws; machine screws available (please specify)
- Fire rated (UL Listed) models up to 180 minutes available
- Power Transfer models available
- Extreme weight or size models available
- Surface mounted models for metal cabinets available
- Steel door reinforcement plates available



S220PT
5½" (140mm)
Power Transfer



S106
2¾" (60mm)
Rear-mount


Available in a wide variety of finishes, models, sizes, and options. Please contact us to order. Visit www.soss.com for product or warranty details.

S220	FR	C26D
MODEL	OPTION	FINISH

PLEASE CONTACT TO ORDER

SOSS INVISIBLE SPRING HINGE CLOSER

SOSS

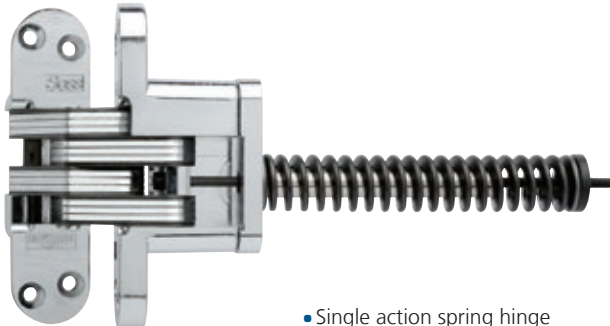

- Single action spring hinge
- For solid wood or hollow core doors 1¾–2" (35–51 mm) thick
- Maximum opening: 180°
- Hinge cannot be seen or tampered with when closed
- Adjustable closing speed after installation by hex key
- Can be installed inside door or jamb
- Recommend one spring hinge for every 20" (508 mm) height or every 55 lbs (25 kg)
- Supporting invisible hinges are required
- Fire rated (UL Listed) models up to 180 minutes available

Available in a wide variety of finishes, models, sizes, and options. Please contact us to order. Visit www.soss.com for product or warranty details.

S220IC	C26D
MODEL	FINISH

PLEASE CONTACT TO ORDER