



Door Locks

01

## DOOR LOCKS TABLE OF CONTENTS

---

Door Handing Guide.....	ii
Finish Guide.....	ii
Abbreviation Guide.....	iii
Function Guides.....	iv

### **COMMERCIAL LOCKSETS**

DOREX F1 Series, Cylindrical, Lever, Grade 1 <b>BHMA</b> .....	01.010
DOREX GX1 Series, Cylindrical, Lever, Grade 1 <b>BHMA</b> .....	01.012
DOREX F Series, Cylindrical, Lever, Grade 2 <b>BHMA</b> .....	01.020
DOREX T2 Series, Cylindrical, Lever, Grade 2 .....	01.021
DOREX RW Series, Cylindrical, Lever, Grade 2 .....	01.023
DOREX CW Series, Cylindrical, Lever, Grade 2 .....	01.024
DOREX EM Series, Cylindrical, Lever, Grade 2 .....	01.026
DOREX GX1B Series, Cylindrical, Knob, Grade 1 .....	01.030
DOREX TL Series, Cylindrical, Knob, Grade 2 .....	01.032
DOREX T2B Series, Cylindrical, Knob, Grade 2 .....	01.034
DOREX IL Series, Interconnected Cylindrical, Lever, Grade 2 .....	01.040
DOREX T2IL Series, Interconnected Tubular, Lever, Grade 2.....	01.042
DOREX GX1A Series, Deadbolt, Grade 1 .....	01.050
DOREX FHA Series, Deadbolt, Grade 2 .....	01.052
DOREX TLA Series, Deadbolt, Grade 2 .....	01.054
DOREX DG1 Series, Gatelatch, Grade 1.....	01.060
DOREX DG2 Series, Gatelatch, Grade 2 .....	01.062

### **MORTISE LOCKSETS**

DOREX DM Series, Mortise, Grade 1 <b>BHMA</b> .....	01.070
DOREX DMDBL Series, Mortise Deadbolt, Grade 1 .....	01.074

### **RESIDENTIAL LOCKSETS**

DOREX Tecnica Design, Grade 3 .....	01.210
DOREX Signature, Grade 3.....	01.230
DOREX Metro .....	01.240
DOREX Builders.....	01.260

### **MISCELLANEOUS LOCKSETS**

Pocket Door Locks .....	01.300
-------------------------	--------

### **COMBINATION LOCKSETS**

DOREX F400T Series, Deadbolt, RFID, Electronic Touch Keypad, Grade 2.....	01.400
DOREX F425T Series, Lever, RFID, Electronic Touch Keypad, Grade 2 .....	01.402
DOREX F500T Series, Smart Electronic Deadbolt, Grade 2 .....	01.405
ER Series, Deadbolt, Electronic Keypad.....	01.410
DOREX F500 Combo Electronic Entry Handleset.....	01.415
DOREX T300 Combo Electronic Entry Handleset.....	01.416
DDL 1150 Series, Lever, Mechanical Keypad.....	01.420
DDL 2200 Series, Knob, Mechanical Keypad .....	01.422


### **PATCH FITTING LOCKSETS**

PF Series, Patch Fitting, Lever .....	01.500
PF Series, Patch Fitting, Deadbolt .....	01.510
DOREX PLH900 Series, Universal Patch Lock & Strike Housing .....	01.520




## DOOR HANDING GUIDE

LEFT HAND (LH)

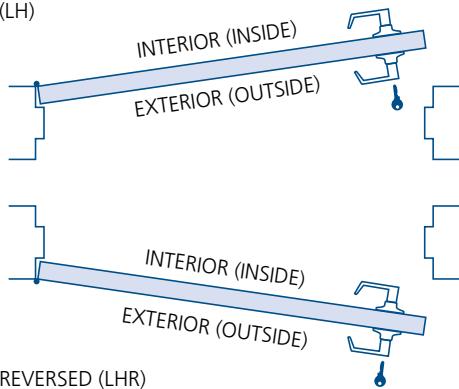

LEFT HAND REVERSED (LHR)

RIGHT HAND (RH)

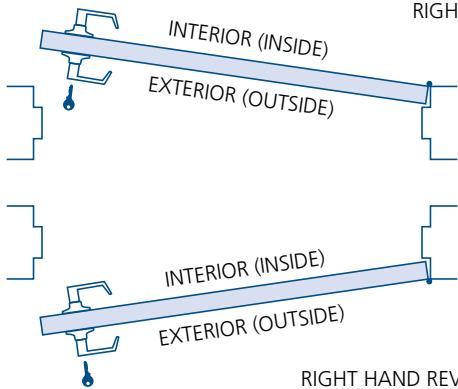

RIGHT HAND REVERSED (RHR)

## FINISH GUIDE



POLISHED BRASS



POLISHED BRASS (ENDURANCE)



SATIN BRASS



ANTIQUE BRASS



SATIN BRONZE

CODE	BP, C3, 3	CODE	V3	CODE	C4, 4, SDB	CODE	AB, C5, 5	CODE	C10, 10
BHMA*	605, 632				633		609, 638		639

OIL RUBBED BRONZE<sup>1</sup>

ANTIQUE BRONZE



POLISHED NICKEL



SATIN NICKEL



ANTIQUE NICKEL

CODE	C10B, 10B	CODE	C11B, 11	CODE	C14, 14	CODE	SDN, C15, 15	CODE	C15A, 15A
BHMA*	640		617, 644		645		619, 646		620, 647



MATTE BLACK



DARK BRONZE / DURANODIC



POLISHED CHROME



SATIN CHROME



POLISHED STAINLESS STEEL

CODE	C19, 19	CODE	BLR, DU, C20D, 20D	CODE	C26, 26	CODE	C26D, 26D	CODE	C32, 32
BHMA*	622, 631		649, 650, 690		625, 651		626, 652		629



SATIN STAINLESS STEEL

CODE	SS, C32D, 32D	CODE		CODE		CODE		CODE	
BHMA*	630								

ALL FINISHES IMAGES ABOVE ARE PHOTOGRAPHIC OR COLOUR APPROXIMATIONS, DELIVERED PRODUCT MAY VARY IN COMPARISON OR BETWEEN ORDERS/LOTS.

OTHER FINISHES AVAILABLE—PLEASE CONTACT.

(\*) EQUIVALENT; CODES DIFFER DEPENDING ON BASE MATERIAL AND/OR FINISH PROCESS.

(1) OIL RUBBED BRONZE IS A «LIVING FINISH» WHOSE APPEARANCE WILL CHANGE OVER TIME.



## DOOR LOCKS GENERAL INFORMATION

### ABBREVIATION GUIDE

#### GENERAL

BS	Backset
DIA, Ø	Diameter
KG	Kilograms
LBS	Pounds
LH	Left hand
LHR	Left hand reversed
MAX	Maximum
MIN	Minimum
N/A, —	Not applicable / Not available
QTY	Quantity (usually followed by notes)
RH	Right hand
RHR	Right hand reversed
SQ, ☒	Square
WT	Weight
/UNIT	Number of items per basic unit of sale (bagged or boxed)
/BOX, /BAG	Number of UNITS found in an inner carton or bag
/CASE	Number of BOXES or UNITS found in an outer (shipping) carton

### LEGEND



FIRE RATED product. Sometimes includes duration of fire-resistance in minutes (M) or hours (H).



Small or Large Format Interchangeable Core (SFIC/LFIC) model or option available.



Keyed product or function. Keying services may be available.



Product, configuration or option meets ADA (Americans with Disabilities Act) requirements.



GRADE 1 product meets or exceeds standardized testing requirements for high traffic, commercial applications.



GRADE 2 product meets or exceeds standardized testing requirements for moderate traffic, commercial applications.



GRADE 3 product meets or exceeds standardized testing requirements for light traffic, commercial or residential applications.



Tested to Canadian and/or American safety and performance standards by Underwriters Laboratories® (UL).



Certified by the Builders Hardware Manufacturers Association® / American National Standards Institute®.



Product is equipped with or works with Radio-frequency Identification (RFID) readers or tags.



Limited warranty length in years, applicable to mechanical, electronic, or finish aspects of a product.







## DOOR LOCKS GENERAL LOCKSET FUNCTION GUIDE

FUNCTION	DESCRIPTION	ANSI	INSIDE / OUTSIDE
<b>10 PASSAGE</b>	Latch bolt operated by lever from either side.	F75	
<b>15 EXIT</b>	Deadlocking latch bolt operated by inside lever. Blank plate on outside.	—	
<b>17 SINGLE DUMMY 00</b>	Lever and rose for one side of door to match other locksets.	—	
<b>32 PATIO</b>	Deadlocking latch bolt operated by lever from either side, except when inside push button locks outside lever. Push button released by turning inside lever or closing door to prevent lock-out.	F77	
<b>42 PRIVACY 40</b>	Latch bolt operated by lever from either side, except when inside push button locks outside lever. Push button released by turning inside lever or closing door to prevent lock-out. Outside lever has provision for emergency unlocking.	F76	
<b>51 ENTRY, OFFICE</b>	Deadlocking latch bolt operated by lever from either side, except when inside push button locks outside lever. Push button released by turning inside lever. Outside lever is unlocked / locked by key.	—	
<b>52 ENTRY</b>	Deadlocking latch bolt operated by lever from either side, except when inside button is pushed and turned (with tool) to lock outside lever for entry by key only. Outside lever remains locked until push button is turned.	F109	
<b>53 ENTRY</b>	Deadlocking latch bolt operated by lever from either side, except when inside button is pushed and turned to lock outside lever for entry by key only. Outside lever remains locked until push button is turned.	F109	
<b>60 STORE</b>	Deadlocking latch bolt operated by lever from either side. A key used on either side locks or unlocks both sides. NOTE: for use in rooms with more than one exit.	F91	
<b>70 CLASSROOM</b>	Deadlocking latch bolt operated by lever from either side, except when outside lever is locked by key. Inside lever is always free to allow exit.	F84	
<b>72 COMMUNICATING</b>	Deadlocking latch bolt operated by lever on either side. Levers are always rigid when locked. Key in either lever locks or unlocks its own lever independently. NOTE: For use in rooms with more than one exit.	F80	
<b>75 CLASSROOM SECURITY</b>	Deadlocking latch bolt operated by lever from either side. Key in either lever locks or unlocks outside lever. Inside lever is always free to allow exit.	F110	
<b>79 INSTITUTION EXIT</b>	Deadlocking latch bolt operated by inside lever. Locked or unlocked by key from inside lever. Blank plate outside.	—	
<b>80 STOREROOM</b>	Deadlocking latch bolt operated by inside lever or key in outside lever. Outside lever always rigid.	F86	
<b>82 INSTITUTION or UTILITY</b>	Deadlocking latch bolt operated by key in either side. Both levers always rigid.	F87	
<b>94 HOTEL or MOTEL</b>	Deadlocking latch bolt operated by inside lever or key in outside lever. Inside push-button prevents use except by emergency key and projects visual occupancy indicator outside. Push-button released by closing door or turning inside knob. Outside lever always rigid.	F93	













## DOOR LOCKS GENERAL DEADBOLT FUNCTION GUIDE

FUNCTION	DESCRIPTION	INSIDE / OUTSIDE
<b>42 PRIVACY</b>	Deadbolt operated by outside emergency key (or tool) or inside thumb turn at all times.	
<b>51 SINGLE CYLINDER</b>	Deadbolt operated by outside key or inside thumb turn at all times.	
<b>55 ONE SIDED or THUMBTURN ONLY</b>	Deadbolt operated by inside thumb turn only at all times.	
<b>57 ONE SIDED, EXTERIOR PLATE or THUMBTURN ONLY, EXTERIOR PLATE</b>	Deadbolt operated by inside thumb turn only at all times. Blank plate on outside.	
<b>60 DOUBLE CYLINDER</b>	Deadbolt operated by key in either cylinder at all times. NOTE: for use in rooms with more than one exit.	
<b>70 SINGLE CYLINDER, CLASSROOM</b>	Deadbolt engaged by outside key only. Inside thumbturn is always free to allow exit.	



## DOOR LOCKS MORTISE LOCKSET FUNCTION GUIDE

FUNCTION	DESCRIPTION	INSIDE / OUTSIDE
<b>10 PASSAGE</b>	Latch bolt operated by lever from either side at all times.	
<b>42 PRIVACY</b>	Latch bolt operated by lever from either side except when thumb turn projects dead bolt and locks outside lever. Unlock by turning inside lever or by using outside emergency key, which retracts the deadbolt.	
<b>45 ENTRANCE</b>	Latch bolt operated by lever from either side except when outside lever is locked by push button rocker. Deadbolt projected by outside key and by thumb turn from inside. Deadbolt retracted by outside key. Rotating inside lever retracts both bolts (simultaneous retraction). Auxiliary latch deadlocks latch bolt.	
<b>50 OFFICE</b>	Latch bolt operated by lever from either side except when outside lever is locked by push button rocker or outside key. Latch bolt may be retracted by outside key or inside lever. Auxiliary latch deadlocks latch bolt.	
<b>56 DORMITORY</b>	Latch bolt operated by lever from either side or outside key. Deadbolt projected/retracted by key from outside and thumb turn from inside. Rotating inside lever retracts both bolts simultaneously. Extended deadbolt automatically deadlocks latch bolt.	
<b>70 CLASSROOM</b>	Latch bolt activated by lever from either side, except when outside lever is locked by outside key. Inside lever is always free to allow exit. Auxiliary latch deadlocks latch bolt.	
<b>80 STOREROOM</b>	Latch bolt operated by outside key or by inside lever. Outside lever is always locked. Auxiliary latch deadlocks latch bolt.	
<b>82 INSTITUTION or UTILITY</b>	Latch bolt retracted by key from either side. Lever on both sides always inoperative. Auxiliary latch deadlocks latch bolt.	
<b>84 STOREROOM WITH DEADBOLT</b>	Deadbolt projected and retracted by outside key or by inside lever or thumb turn. Inside lever retracts both bolts simultaneously. Extended deadbolt automatically deadlocks latch bolt.	
<b>171 SINGLE DUMMY</b>	Fixed, through-bolt mounted, inside or outside, single lever. *Surface mount available.	
<b>172 BACK-TO-BACK DUMMY</b>	Fixed, through-bolt mounted, inside and outside, paired levers.	







F1H

BHMA  
CERTIFIED

G1

cULus  
LISTED

Type	• Cylindrical lock
Certifications	<ul style="list-style-type: none"> <li>• Certified ANSI/BHMA A156.2, Series 4000, Grade 1</li> <li>• cULus listed, 3hr fire-rating</li> <li>• UL 10C Positive Pressure Rating</li> <li>• Meets ADA requirements</li> <li>• 10 Year limited warranty</li> </ul>
Door Thickness	• 1 3/8–2 1/4" (35–57 mm)
Handing	• Non handed
Backset	<ul style="list-style-type: none"> <li>• 2 3/4" (70 mm)</li> <li>• 2 5/8" (60 mm) – available</li> </ul>
Spring Latch	<ul style="list-style-type: none"> <li>• Stainless steel, 1/2" (12.7 mm) throw</li> <li>• Deadlatch, 3/4" (19 mm) throw – available</li> </ul>
Faceplate	<ul style="list-style-type: none"> <li>• Mortise type, square corners</li> <li>• 1 1/8x2 1/4" (28.5x57 mm)</li> </ul>
Strike	• ASA Strike
Trim	<ul style="list-style-type: none"> <li>• Solid, pressure cast heavy duty lever</li> <li>• Lever secured by additional set screw</li> <li>• Brass rose</li> <li>• Rose diameter: 3 1/2" (89 mm)</li> </ul>

Chassis	<ul style="list-style-type: none"> <li>• Concealed mounting plate and screws</li> <li>• Fixed security posts</li> <li>• Lever clutch release</li> </ul>
Preparation	<ul style="list-style-type: none"> <li>• Cross bore: 2 1/8" (54 mm)</li> <li>• Edge bore: 1" (25.4 mm)</li> </ul>
Cylinder	<ul style="list-style-type: none"> <li>• Solid brass, 6-pin</li> <li>• Schlage "C" keyway, 2 keys</li> <li>• Removable, rekeyable</li> <li>• Small format interchangeable core (SFIC) model – available*</li> </ul>

*Other keyways and keying options available, including CX5 high security. (\*) BEST® and CX5® cores sold separately.*

Functions	10 Passage	53 Entry
	17 Dummy, single	70 Classroom
	42 Privacy	80 Storeroom

Lever Styles	C-Curved return*, H-Standard return, S-Straight; no return*
--------------	--

*(\*) Special order.*

Finish	26D-Satin chrome
--------	------------------

*Other finishes available by special order.*

F1	H	53	26D	238
SERIES	STYLE	FUNCTION	FINISH	OPTION <sup>(1)</sup>


(1) OPTION: 238 2-3/8IN (60MM) BACKSET



## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>2</sup>	FINISH <sup>2</sup>	/ CASE
F1	C <sup>1</sup> , H, S <sup>1</sup>	10 Passage	26D	6
F1	C <sup>1</sup> , H, S <sup>1</sup>	17 Dummy, single	26D	12
F1	C <sup>1</sup> , H, S <sup>1</sup>	42 Privacy	26D	6
F1	C <sup>1</sup> , H, S <sup>1</sup>	53 Entry 	26D	6
F1	C <sup>1</sup> , H, S <sup>1</sup>	70 Classroom 	26D	6
F1	C <sup>1</sup> , H, S <sup>1</sup>	80 Storeroom 	26D	6

(1) SPECIAL ORDER. (2) OTHER FINISHES AND FUNCTIONS AVAILABLE BY SPECIAL ORDER. MAY REQUIRE MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES.  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

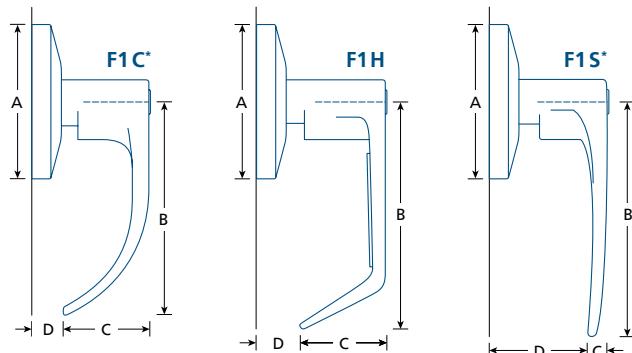

(\*) SPECIAL ORDER.

	A	B	C	D*
F1C	 3½ (89)	4½ (114)	2½ (63.3)	5/8 (16)
F1H	 3½ (89)	5 (127)	2½ (63.3)	1/2 (12.7)
F1S	 3½ (89)	5 (127)	¾ (19)	2¾ (56)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**

T-Strike, square corners:  
1½x2¾" (28.5x70 mm)



**ASA-T**

ASA strike with adjustable tab

**ASANH**

ASA strike, no hole



**F1001**

Passage latch: 2¾" (60 mm) backset,  
1½x2¼" (28.5x57 mm) faceplate



**F1010**

Privacy latch: 2¾" (60 mm) backset,  
1½x2¼" (28.5x57 mm) faceplate



**F1005**

Deadlatch: 2¾" (60 mm) backset,  
1½x2¼" (28.5x57 mm) faceplate



**F1DL234-34**

Deadlatch: 2¾" (70 mm) backset, ¾" (19 mm) throw.  
1½x2¼" (28.5x57 mm) faceplate  
For use in double door or electric strike applications





**Type** • Cylindrical lock

**Certifications** • Certified ANSI/BHMA A156.2, Series 4000, Grade 1  
• cULus listed, 3hr fire-rating  
• UL 10C Positive Pressure Rating  
• Meets ADA requirements  
• 10 Year limited warranty

**Door Thickness** • 1 3/8–2" (35–51mm)  
• SFIC Models: 1 1/8–2" (40–51mm)

**Handing** • Non handed

**Backset** • 2 3/4" (70 mm)  
• 2 5/8" (60 mm) – available  
• 3 3/4" (95 mm) – available  
• 5" (127 mm) – available

**Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw  
• Deadlatch, 3/4" (19 mm) throw – available

**Faceplate** • Mortise type, square corners  
• 1 1/8x2 1/4" (28.5x57 mm)

**Strike** • ASA Strike

**Trim** • Solid, pressure cast lever  
• Brass rose  
• Rose diameter: 3 9/16" (90 mm)

**Chassis** • Concealed mounting plate and screws  
• Fixed security posts  
• Lever clutch release

**Preparation** • Cross bore: 2 1/8" (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable  
• Small format interchangeable core (SFIC) model – available\*

*Other keyways and keying options available, including CX5 high security. (\*) BEST® and CX5® cores sold separately.*

<b>Functions</b>	10	Passage	60	Store
	15	Exit	70	Classroom
	17	Dummy, single	75	Classroom security
	42	Privacy	80	Storeroom
	53	Entry	82	Institution

**Lever Styles** C—Curved return, L—Standard return, S—Straight; no return

**Finish** C19—Matte black, C26D—Satin chrome

*Other finishes available by special order*


GX1	L	53	C26D
SERIES	STYLE	FUNCTION	FINISH



## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
<b>GX1</b>	C, L, S	10 Passage	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	L	15 Exit	C26D	6
<b>GX1</b>	L	17 Dummy, single	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	C, L, S	42 Privacy	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	C, L, S	53 Entry	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	C, L, S	53IC Entry SFIC*	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	L	60IC Store SFIC*	C26D	6
<b>GX1</b>	C, L, S	70 Classroom	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	C, L, S	70IC Classroom SFIC*	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	L	75 Classroom security	C26D	6
<b>GX1</b>	L	75IC Classroom security SFIC*	C26D	6
<b>GX1</b>	C, L, S	80 Storeroom	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	C, L, S	80IC Storeroom SFIC*	C26D, C19 <sup>2</sup>	6
<b>GX1</b>	L	82 Institution	C26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED. (2) GX1L ONLY (\* ) ALL SFIC MODELS ARE LESS CORE KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

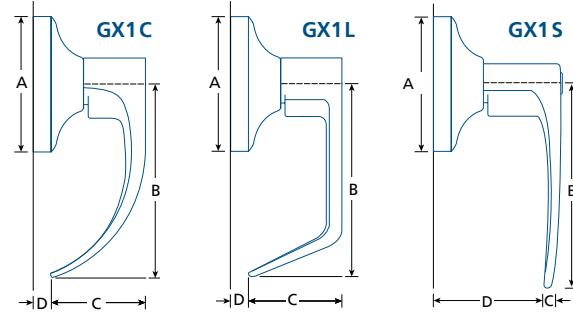

	A	B	C	D*
<b>GX1C</b>	3 9/16 (90)	5 (127)	2 1/2 (63.3)	3/8 (10)
<b>GX1L</b>	3 9/16 (90)	5 (127)	2 5/8 (66.7)	3/8 (10)
<b>GX1S</b>	3 9/16 (90)	5 (127)	7/8 (22)	27/16 (62)

IN (MM)

(\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**

T-Strike, square corners:  
1 1/8 x 2 3/4" (28.5 x 70 mm)



**9106NH**

T-Strike, no hole; square corners:  
1 1/8 x 2 3/4" (28.5 x 70 mm)



**ASA-T**

ASA strike with adjustable tab

**ASANH**

ASA strike, no hole

**CX5-9807**

CX5 high security SFIC core, 7 pin, 0 bitted



**CBI-BF6KD-26D**

BEST® F type SFIC core, 6 pin, keyed different



**CBI-BF7KD-26D**

BEST® F type SFIC core, 7 pin, keyed different



**GX1SL238**

Passage latch: 2 3/8" (60 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**GX1PL234**

Privacy latch: 2 3/8" (60 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**GX1DL238**

Deadlatch: 2 3/8" (60 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**GX1DL234-34**

Deadlatch: 2 3/8" (60 mm) backset, 3/4" (19 mm) throw,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate  
For use in double door or electric strike applications



**GX1LE334**

Backset extension to 3 3/4" (95 mm); use with  
2 3/8" (60 mm) backset latch



**GX1LE500**

Backset extension to 5" (127 mm); use with  
2 3/8" (60 mm) backset latch





**Type** • Cylindrical lock, electrified

**Certifications** • Conforms to ANSI/BHMA A156.2, Series 4000, Grade 1  
• cULus listed, 3hr fire-rating  
• UL 10C Positive Pressure Rating  
• Meets ADA requirements  
• 10 Year limited mechanical warranty  
• 1 Year limited electronic warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51mm)  
• SFIC Models: 1 $\frac{1}{16}$ –2" (40–51mm)

**Handing** • Non handed

**Backset** • 2 $\frac{3}{4}$ " (70mm)  
• 2 $\frac{3}{8}$ " (60mm) – available  
• 3 $\frac{3}{4}$ " (95mm) – available  
• 5" (127mm) – available

**Spring Latch** • Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw  
• Deadlatch,  $\frac{3}{4}$ " (19mm) throw – available

**Faceplate** • Mortise type, square corners  
• 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm)

**Strike** • ASA Strike

**Trim** • Solid, pressure cast lever  
• Brass rose  
• Rose diameter: 3 $\frac{3}{16}$ " (90 mm)

**Chassis** • Concealed mounting plate and screws  
• Fixed security posts  
• Lever clutch release

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " (54mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable  
• Small format interchangeable core (SFIC) model – available\*

*Other keyways and keying options available, including CX high security. (\*) BEST® and CX5® cores sold separately.*

**Electrical Options** **EL** Fail Safe (Power fails = Unlocked)  
**EL-RX** Fail Safe, Request to Exit  
**EU** Fail Secure (Power fails = Locked)  
**EU-RX** Fail Secure, Request to Exit

**Power** • Dual-voltage 12–24VDC

**Current** • 12VDC – 0.6A @ 20Ω

**Draw** • 24VDC – 0.3A @ 80Ω

**Operation** • -32° to 120°F (-0° to 49°C)

**Temperature** *Temperature tolerance can vary due to weather.*

**Function** **80** Storeroom

**Lever Styles** C-Curved return, L-Standard return, S-Straight; no return

**Finish** C19-Matte black; C26D-Satin chrome

*Other finishes available by special order*

GX1	L	80	C26D –	EL	–	RX
SERIES	STYLE	FUNCTION	FINISH	OPTION <sup>1</sup>	OPTION <sup>2</sup>	

(1) EL: FAIL SAFE EU: FAIL SECURE (2) RX: WITH REQUEST TO EXIT




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-09.

## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
<b>GX1</b>	C, L, S	80 Storeroom 	C19, C26D	6

(1) SFIC AND OTHER FUNCTIONS AND FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

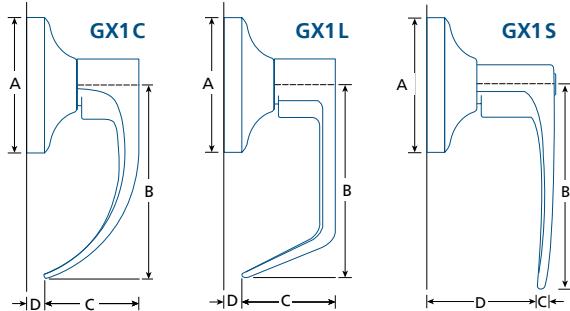

	A	B	C	D*
<b>GX1C</b> 	3 $\frac{9}{16}$ (90)	5 (127)	2 $\frac{1}{2}$ (63.3)	3 $\frac{3}{8}$ (10)
<b>GX1L</b> 	3 $\frac{9}{16}$ (90)	5 (127)	2 $\frac{5}{8}$ (66.7)	3 $\frac{3}{8}$ (10)
<b>GX1S</b> 	3 $\frac{9}{16}$ (90)	5 (127)	7 $\frac{1}{8}$ (22)	2 $\frac{7}{16}$ (62)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**

T-Strike, square corners:  
1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (28.5 x 70 mm)



**9106NH**

ASA strike, no hole; square corners:  
1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (28.5 x 70 mm)



**CX5-9807**

CX5 high security SFIC core, 7 pin, 0 bitted

**CBI-BF6KD-26D**

BEST® F type SFIC core, 6 pin, keyed different

**CBI-BF7KD-26D**

BEST® F type SFIC core, 7 pin, keyed different



**JC-603QC-BB1079-ETW04/08**

Wired power transfer hinge with 4 or 8, 28 AWG wires (MAX. 24V, 4A) with molex connector. Must be installed with ball bearing hinges of the same size (4 $\frac{1}{2}$  x 4). Not rated for use on fire doors. See page 04.620 for more details.



**GX1SL238**

Passage latch: 2 $\frac{3}{8}$ " (60 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**GX1PL238**

Privacy latch: 2 $\frac{3}{8}$ " (60 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**GX1DL238**

Deadlatch: 2 $\frac{3}{8}$ " (60 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**GX1DL234**

Deadlatch: 2 $\frac{3}{4}$ " (70 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**GX1DL234-34**

Deadlatch: 2 $\frac{3}{4}$ " (70 mm) backset,  $\frac{3}{4}$ " (19 mm) throw, 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate  
For use in double door or electric strike applications



**GX1LE334**

Backset extension to 3 $\frac{3}{4}$ " (95 mm); use with  
2 $\frac{3}{8}$ " (60 mm) backset latch



**GX1LE500**

Backset extension to 5" (127 mm); use with  
2 $\frac{3}{4}$ " (70 mm) backset latch



BHMA  
CERTIFIED

G2

cULus  
LISTED

3H

ADA

10  
YEAR**Type**

- Cylindrical lock

**Certifications**

- Certified ANSI/BHMA A156.2, Series 4000, Grade 2
- cULus listed, 3hr fire-rating
- UL 10C Positive Pressure Rating
- Meets ADA requirements
- 10 Year limited warranty

**Door Thickness** • 1 3/8"–1 3/4" (35–44.5 mm)

**Handing** • Non handed

**Backset** • 2 3/4" (70 mm)  
• 2 5/8" (60 mm) – available  
• 3 3/4" (95 mm) – available  
• 5" (127 mm) – available

**Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw

**Faceplate** • Mortise type, square corners  
• 1 1/8x2 1/4" (28.5x57 mm)

**Strike** • ASA Strike

**Trim** • Solid, pressure cast lever  
• Brass rose  
• Rose diameter: 3 5/16" (84.5 mm)

**Chassis**

- Concealed mounting plate and screws
- Removable security posts
- Lever clutch release – option\*

(\* For keyed functions, may require special order

**Preparation**

- Cross bore: 2 1/8" (54 mm)
- Edge bore: 1" (25.4 mm)

**Cylinder**

- Solid brass, 6-pin
- Schlage "C" keyway, 2 keys
- Removable, rekeyable

*Other keyways and keying options available, including CX5 high security*

<b>Functions</b>	10 Passage	53 Entry*
	15 Exit	60 Store
	17 Dummy, single	70 Classroom
	42 Privacy	80 Storeroom*
	51 Office	82 Institution

(\* Lever clutch release available (-0)

**Lever Styles** C-Curved return, H-Standard return, L-Linear; no return, S-Straight; no return

**Finish** C19-Matte black, C26D-Satin chrome, C3-Polished brass

*Other finishes available by special order*

F	H	53	C26D	–	O
SERIES	STYLE	FUNCTION	FINISH	OPTION <sup>1</sup>	

(1) OPTIONS: 238 2-3/8IN (60MM) BACKSET O LEVER CLUTCH RELEASE (53 & 80 ONLY)




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2023-10.

## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/ CASE
F	C, H, L, S	10 Passage	C26D, C3, C19 <sup>2</sup>	12
F	C, H, S	15 Exit	C26D	12
F	C, H, L, S	17 Dummy, single	C26D, C3, C19 <sup>2</sup>	40
F	C, H, L, S	42 Privacy	C26D, C3, C19 <sup>2</sup>	12
F	C, H, S	51 Office	C26D	12
F	C, H, L, S	53 Entry	C26D, C3, C19 <sup>2</sup>	12
F	C, H	53-O Entry, with clutch release	C26D	12
F	C, H, S	60 Store	C26D	12
F	C, H, L, S	70 Classroom	C26D, C3, C19 <sup>2</sup>	12
F	C, H, L, S	80 Storeroom	C26D, C3, C19 <sup>2</sup>	12
F	C, H	80-O Storeroom, with clutch release	C26D	12
F	C, H, S	82 Institution / utility	C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE. (1) NOTE: IN-STOCK FS LEVERS ARE ONLY AVAILABLE IN C26D. (2) FH, FL ONLY.

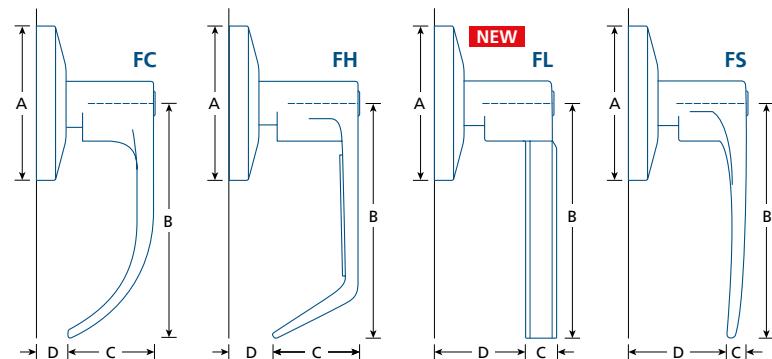

	A	B	C	D*
FC		3 5/16 (84.5)	4 1/2 (114)	1 7/8 (48) 1/2 (12.7)
FH		3 5/16 (84.5)	4 1/2 (114)	1 7/8 (48) 1/2 (12.7)
FL		3 5/16 (84.5)	4 11/16 (119)	3/4 (19) 127/32 (46.8)
FS		3 5/16 (84.5)	4 11/16 (119)	9/16 (14) 127/32 (46.8)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**

T-Strike, square corners:  
 $1\frac{1}{8} \times 2\frac{3}{4}$ " (28.5 x 70 mm)



**9106NH**

T-Strike, no hole; square corners:  
 $1\frac{1}{8} \times 2\frac{3}{4}$ " (28.5 x 70 mm)



**FH001**

Passage latch:  $2\frac{3}{8}$ " (60 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**FH003**

Passage latch:  $2\frac{3}{4}$ " (70 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**FH010**

Privacy latch:  $2\frac{3}{8}$ " (60 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**FH002**

Privacy latch:  $2\frac{3}{4}$ " (70 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**FH005**

Deadlatch:  $2\frac{3}{8}$ " (60 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**FH004**

Deadlatch:  $2\frac{3}{4}$ " (70 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**TL013**

Backset extension to  $3\frac{3}{4}$ " (95 mm);  
 Use with  $2\frac{3}{8}$ " (60 mm) backset latch



**TL014**

Backset extension to 5" (127 mm);  
 Use with  $2\frac{3}{4}$ " (70 mm) backset latch





TECNICA DESIGN  
THE FLAT



**Type** • Cylindrical lock

**Certifications** • Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2  
• cULus listed, 3hr fire-rating  
• UL 10C Positive Pressure Rating  
• Meets ADA requirements  
• 10 Year limited warranty

**Door Thickness** • 1 3/8–2" (35–51 mm)

**Handing** • Non handed

**Backset** • 2 3/4" (70 mm)  
• 2 5/8" (60 mm) – available  
• 3 3/4" (95 mm) – available  
• 5" (127 mm) – available

**Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw  
• Deadlatch, 3/4" (19 mm) throw – available

**Faceplate** • Mortise type, square corners  
• 1 1/8x2 1/4" (28.5x57 mm)

**Strike** • ASA Strike

**Trim** • Solid, pressure cast lever  
• Brass rose  
• Rose diameter: 3 5/16" (84.5 mm)

**Chassis** • Concealed mounting plate and screws  
• Removable security posts  
• Lever clutch release – option\*

*(\* For keyed functions, may require special order)*

**Preparation** • Cross bore: 2 1/8" (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable

*Other keyways and keying options available, including CX5 high security*

**Functions** 00 Dummy, single      53 Entry  
10 Passage      70 Classroom  
40 Privacy      80 Storeroom

**Lever Styles** F-The Flat; H-Standard return

**Finish** 15-Satin nickel, 19-Matte black,  
26D-Satin chrome

*Other finishes available by special order*

T2	F	53	–	26D	–	C
SERIES	STYLE	FUNCTION		FINISH		OPTION <sup>1</sup>


(1) C: CLUTCH RELEASE.



## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/ CASE
T2	F, H	00 Dummy, single	15 <sup>2</sup> , 19 <sup>2</sup> , 26D	12
T2	F, H	10 Passage	15 <sup>2</sup> , 19 <sup>2</sup> , 26D	6
T2	F, H	40 Privacy, push button thumb-turn	15 <sup>2</sup> , 19 <sup>2</sup> , 26D	6
T2	F, H	53 Entry ↪	15 <sup>2</sup> , 19 <sup>2</sup> , 26D	6
T2	H	53-C Entry, with clutch release ↪	26D	6
T2	F, H	70 Classroom ↪	15 <sup>2</sup> , 19 <sup>2</sup> , 26D	6
T2	H	70-C Classroom, with clutch release ↪	26D	6
T2	F, H	80 Storeroom ↪	15 <sup>2</sup> , 19 <sup>2</sup> , 26D	6
T2	H	80-C Storeroom, with clutch release ↪	26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED. (2) AVAILABLE FOR T2H BY SPECIAL ORDER.  
↪ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

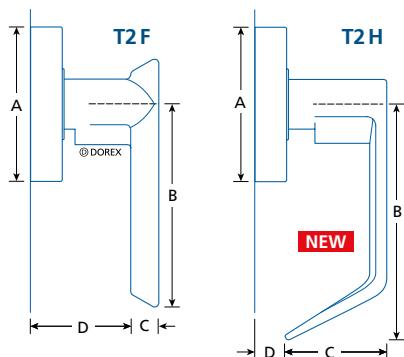

	A	B	C	D*
<b>T2 F</b>	3 5/16 (84.5)	4 7/32 (107)	5/8 (16.7)	2 (51.3)
<b>T2 H</b>	3 5/16 (84.5)	4 1/2 (114)	2 5/16 (58.7)	3/8 (9.5)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**  
T-Strike, square corners:  
1 1/8 x 2 3/4" (28.5 x 70 mm)



**9106NH**  
T-Strike, no hole; square corners:  
1 1/8 x 2 3/4" (28.5 x 70 mm)



**ASA-T**  
ASA strike with adjustable tab

**ASANH**  
ASA strike, no hole



**TL020**  
Plastic spacer for latches with 1 x 2 1/4" (25.4 x 57 mm) faceplate to fit preparations for 1 1/8 x 2 1/4" (28.5 x 57 mm) faceplates



**TL013**  
Backset extension to 3 3/4" (95 mm);  
Use with 2 3/8" (60 mm) backset latch



**TL014**  
Backset extension to 5" (127 mm);  
Use with 2 3/4" (70 mm) backset latch



**TL001**  
Passage latch: 2 3/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL003**  
Passage latch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL010**  
Privacy latch: 2 3/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL002**  
Privacy latch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL005**  
Deadlatch: 2 3/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL004**  
Deadlatch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL006**  
Deadlatch: 5" (127 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**GX1DL234-34**  
Deadlatch: 2 3/4" (70 mm) backset, 3/4" (19 mm) throw,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate  
For use in double door or electric strike applications



INDICATOR MODEL  
AVAILABLE

**Type** • Cylindrical lock

**Certifications** • Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2  
• cULus listed, 3hr fire-rating  
• UL 10C Positive Pressure Rating  
• Meets ADA requirements  
• 1 Year limited warranty

**Door Thickness** • 1 3/8–1 3/4" (35–45 mm)  
• Indicator model: 1 3/4" (45 mm)

**Handing** • Non handed

**Backset** • 2 3/4" (70 mm)  
• 2 5/8" (60 mm) – available\*  
(\*) Sold separately

**Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw

**Faceplate** • Mortise type, square corners  
• 1 1/8x2 1/4" (28.5x57 mm)

**Strike** • ASA Strike

**Trim** • Solid, pressure cast heavy duty lever  
• Brass rose  
• Rose diameter: 3 3/8" (85.7 mm)

**Chassis** • Concealed mounting plate and screws  
• Removable security posts

**Preparation** • Cross bore: 2 1/8" (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable

*Other keyways and keying options available, including CX5 high security.*

<b>Functions</b>	10 Passage	53 Entry
	17 Dummy, single	53I Entry w/ indicator
	42 Privacy	70 Classroom
	42I Privacy w/ indicator	80 Storeroom

**Lever Styles** H-Standard return

**Finish** 26D-Satin chrome

<b>RW</b>	<b>H</b>	<b>53</b>	<b>–</b>	<b>C26D</b>
SERIES	STYLE	FUNCTION		FINISH

(1) OPTION:




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-09.

## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH	/ CASE
RW	H	10 Passage	26D	10
RW	H	17 Dummy, single	26D	20
RW	H	42 Privacy	26D	10
RW	H	42I Privacy, with indicator	26D	10
RW	H	53 Entry 	26D	10
RW	H	53I Entry, with indicator 	26D	10
RW	H	70 Classroom 	26D	10
RW	H	80 Storeroom 	26D	10

(1) OTHER FUNCTIONS AVAILABLE. MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.

 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.



	A	B	C	D	E
RW	 $3\frac{3}{8}$ (85.7)	$4\frac{3}{4}$ (120)	$2\frac{1}{8}$ (54)	$\frac{7}{16}^*$ (11)	$\frac{3}{8}$ (9.5)
RW Indicator	 $3\frac{3}{8}$ (85.7)	$4\frac{3}{4}$ (120)	$2\frac{1}{8}$ (54)	$\frac{7}{16}$ (11)	$\frac{9}{16}$ (14.3)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**  
T-Strike, square corners:  
1 1/8 x 2 3/4" (28.5 x 70 mm)



**CWAL-01**  
Passage latch: 2 3/8" (60 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**ASA**  
ASA strike



**CWAL-05**  
Deadlatch: 2 3/8" (60 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate





**Type** • Cylindrical lock

**Certifications** • Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2  
• cULus listed, 3hr fire-rating  
• UL 10C Positive Pressure Rating  
• Meets ADA requirements  
• 1 Year limited warranty

**Door Thickness** • 1 3/8–1 3/4" (35–45 mm)

**Handing** • Non handed

**Backset** • 2 3/4" (70 mm)  
• 2 5/8" (60 mm) – available

**Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw

**Faceplate** • Mortise type, square corners  
• 1 1/8x2 1/4" (28.5x57 mm)

**Strike** • ASA Strike

**Trim** • Solid, pressure cast heavy duty lever  
• Brass rose  
• Rose diameter: 3" (76 mm)

**Chassis** • Concealed mounting plate and screws

**Preparation** • Cross bore: 2 1/8" (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable

*Other keyways and keying options available, including CX5 high security.*

**Functions** 10 Passage      53 Entry  
17 Dummy, single      70 Classroom  
42 Privacy      80 Storeroom

**Lever Styles** H—Standard return

**Finish** 26D—Satin chrome

CW	H	53	–	C26D	238
SERIES	STYLE	FUNCTION	FINISH	OPTION <sup>(1)</sup>	

(1) OPTION: 238 2-3/8IN (60MM) BACKSET




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-12.

## SELECTION GUIDE

SERIES	STYLE	FUNCTION <sup>1</sup>	FINISH	/ CASE
CW	H	10 Passage	26D	10
CW	H	17 Dummy, single	26D	20
CW	H	42 Privacy	26D	10
CW	H	53 Entry 	26D	10
CW	H	70 Classroom 	26D	10
CW	H	80 Storeroom 	26D	10

(1) OTHER FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.

 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

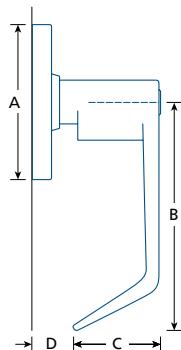

	A	B	C	D*
<b>CWH</b> 	3 (76)	4 $\frac{3}{4}$ (120)	2 $\frac{1}{16}$ (52)	$\frac{1}{2}$ (12.7)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**  
T-Strike, square corners:  
1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (28.5 x 70 mm)



**CWAL-01**  
Passage latch: 2 $\frac{3}{8}$ " (60 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate



**ASA**  
ASA strike



**CWAL-05**  
Deadlatch: 2 $\frac{3}{8}$ " (60 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate





**Type** • Cylindrical lock

**Certifications** • Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2  
 • cULus listed, 3hr fire-rating  
 • UL 10C Positive Pressure Rating  
 • Meets ADA requirements  
 • 1 Year limited warranty

**Door Thickness** • 1 3/8–1 3/4" (35–44.5 mm)

**Handing** • Non handed

**Backset** • 2 3/4" (70 mm)  
 • 2 5/8" (60 mm) – available  
 • 3 3/4" (95 mm) – available  
 • 5" (127 mm) – available

**Spring Latch** • Stainless steel, 1/2" (12.7 mm) throw

**Faceplate** • Mortise type, square corners  
 • 1 1/8x2 1/4" (28.5x57 mm)  
 • 2 5/8" (60 mm) backset: 1x2 1/4" (25.4x57 mm)

**Strike** • ASA Strike

**Trim** • Solid, pressure cast lever  
 • Brass rose  
 • Rose diameter: 3" (76 mm)

**Chassis** • Concealed mounting plate and screws  
 • Removable security posts

**Preparation** • Cross bore: 2 1/8" (54 mm)  
 • Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
 • Schlage "C" keyway, 2 keys  
 • Removable, rekeyable

*Other keyways and keying options available, including CX5 high security*

<b>Functions</b>	10 Passage	60 Store
	15 Exit	70 Classroom
	17 Dummy, single	79 Institution exit
	42 Privacy	80 Storeroom
	52 Entry <sup>1</sup>	82 Institution
	53 Entry	

*(1) See selection guide for details*

**Lever Styles** M–Standard, return

**Finish** C15–Satin nickel  
 C3–Polished brass

*Other finishes available by special order*

E	M	53	C15	238
SERIES	STYLE	FUNCTION	FINISH	OPTION <sup>1</sup>

(1) OPTIONS: 238 2-3/8IN (60MM) BACKSET




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
 VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2023-10.

## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/ CASE
EM	10 Passage	C15, C3	10
EM	15 Exit	C15	10
EM	17 Dummy, single	C15, C3	20
EM	42 Privacy	C15, C3	10
EM	52 Entry, locking slotted push button 	C15, C3	10
EM	53 Entry, locking thumb-turn push button 	C15, C3	10
EM	53LC Entry, less core 	C15, C3	10
EM	60 Store 	C15	10
EM	70 Classroom 	C15, C3	10
EM	79 Institution exit 	C15	10
EM	80 Storeroom 	C15, C3	10
EM	82 Institution 	C15	10

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE



	A	B	C	D*
EM	3 (76)	4 (102)	1 7/8 (48)	7/16 (11)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**  
T-Strike, square corners:  
1 1/8x2 3/4" (28.5x70 mm)



**9106NH**  
T-Strike, no hole; square corners:  
1 1/8x2 3/4" (28.5x70 mm)



**ASA-T**  
ASA Strike, adjustable tab; square corners



**TL020**  
Plastic spacer for latches with 1x2 1/4" (25.4x57 mm) faceplate to fit preparations for 1 1/8x2 1/4" (28.5x70 mm) faceplates



**TL013**  
Backset extension to 3 3/4" (95 mm);  
Use with 2 3/8" (60 mm) backset latch



**TL014**  
Backset extension to 5" (127 mm);  
Use with 2 3/4" (70 mm) backset latch



**TL001**  
Passage latch: 2 3/8" (60 mm) backset,  
1x2 1/4" (25.4x57 mm) faceplate



**TL003**  
Passage latch: 2 3/4" (70 mm) backset,  
1 1/8x2 1/4" (28.5x57 mm) faceplate




**TL005**  
Privacy latch: 2 3/8" (60 mm) backset,  
1x2 1/4" (25.4x57 mm) faceplate



**TL002**  
Privacy latch: 2 3/4" (70 mm) backset,  
1 1/8x2 1/4" (28.5x57 mm) faceplate



**TL004**  
Deadlatch: 2 3/8" (60 mm) backset  
1x2 1/4" (25.4x57 mm) faceplate



**TL006**  
Deadlatch: 2 3/4" (70 mm) backset,  
1 1/8x2 1/4" (28.5x57 mm) faceplate





Type	• Cylindrical lock
Certifications	<ul style="list-style-type: none"> <li>• Conforms to ANSI/BHMA A156.2, Series 4000, Grade 1</li> <li>• cULus listed, 3hr fire-rating</li> <li>• UL 10C Positive Pressure Rating</li> <li>• 10 Year limited warranty</li> </ul>
Door Thickness	<ul style="list-style-type: none"> <li>• 1 3/8–2" (35–51 mm)</li> <li>• SFIC models: 1 15/16–2" (40–51 mm)</li> </ul>
Handing	<ul style="list-style-type: none"> <li>• Non handed</li> </ul>
Backset	<ul style="list-style-type: none"> <li>• 2 3/4" (70 mm)</li> <li>• 2 5/8" (60 mm) – available</li> <li>• 3 3/4" (95 mm) – available</li> <li>• 5" (127 mm) – available</li> </ul>
Spring Latch	<ul style="list-style-type: none"> <li>• Stainless steel, 1/2" (12.7 mm) throw</li> <li>• Deadlatch, 3/4" (19 mm) throw – available</li> </ul>
Faceplate	<ul style="list-style-type: none"> <li>• Mortise type, square corners</li> <li>• 1 1/8x2 1/4" (28.5x57 mm)</li> </ul>
Strike	<ul style="list-style-type: none"> <li>• ASA Strike</li> </ul>
Trim	<ul style="list-style-type: none"> <li>• Stainless steel knob</li> <li>• Stainless steel rose</li> <li>• Rose diameter: 2 15/16" (74.6 mm)</li> </ul>

Chassis	<ul style="list-style-type: none"> <li>• Concealed mounting plate and screws</li> <li>• Removable security posts</li> </ul>
Preparation	<ul style="list-style-type: none"> <li>• Cross bore: 2 1/8" (54 mm)</li> <li>• Edge bore: 1" (25.4 mm)</li> </ul>
Cylinder	<ul style="list-style-type: none"> <li>• Solid brass, 6-pin</li> <li>• Schlage "C" keyway, 2 keys</li> <li>• Removable, rekeyable</li> <li>• Small format interchangeable core (SFIC) model – available*</li> </ul>
<i>Other keyways and keying options available, including CX5 high security. (*) BEST® and CX5® cores sold separately.</i>	

Functions	10	Passage	70	Classroom
	42	Privacy	80	Storeroom
	53	Entry		
	60	Store		

Finish C32D–Stainless steel

*Other finishes available by special order*

GX1B	53	C32D
SERIES	FUNCTION	FINISH




## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
<b>GX1B</b>	10 Passage	C32D	6
<b>GX1B</b>	42 Privacy	C32D	6
<b>GX1B</b>	53 Entry	C32D	6
<b>GX1B</b>	53IC Entry SFIC, less core	C32D	6
<b>GX1B</b>	60 Store	C32D	6
<b>GX1B</b>	60IC Store SFIC, less core	C32D	6
<b>GX1B</b>	70 Classroom	C32D	6
<b>GX1B</b>	70IC Classroom SFIC, less core	C32D	6
<b>GX1B</b>	80 Storeroom	C32D	6
<b>GX1B</b>	80IC Storeroom SFIC, less core	C32D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

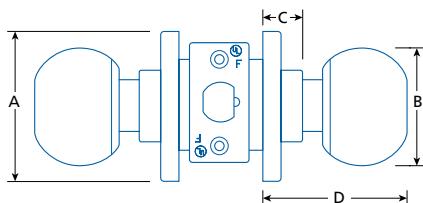

	A	B	C	D*
<b>GX1B</b>	2 <sup>15</sup> / <sub>16</sub> (74.6)	2 <sup>1</sup> / <sub>4</sub> (57)	1 <sup>9</sup> / <sub>16</sub> (21)	2 <sup>5</sup> / <sub>8</sub> –3 (67–76)

IN (MM) (\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**

T-Strike, square corners:  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub> (28.5 x 70 mm)



**9106NH**

T-Strike, no hole; square corners:  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub> (28.5 x 70 mm)



**GX1SL238**

Passage latch: 2<sup>3</sup>/<sub>8</sub> (60 mm) backset  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub> (28.5 x 57 mm) faceplate

**GX1SL234**

Passage latch: 2<sup>3</sup>/<sub>8</sub> (70 mm) backset  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub> (28.5 x 57 mm) faceplate

**GX1PL238**

Privacy latch: 2<sup>3</sup>/<sub>8</sub> (60 mm) backset  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub> (28.5 x 57 mm) faceplate

**GX1PL234**

Privacy latch: 2<sup>3</sup>/<sub>8</sub> (70 mm) backset  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub> (28.5 x 57 mm) faceplate



**GX1DL238**

Deadlatch: 2<sup>3</sup>/<sub>8</sub> (60 mm) backset  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub> (28.5 x 57 mm) faceplate

**GX1DL234**

Deadlatch: 2<sup>3</sup>/<sub>8</sub> (70 mm) backset  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub> (28.5 x 57 mm) faceplate



**GX1DL234-34**

Deadlatch: 2<sup>3</sup>/<sub>8</sub> (70 mm) backset, <sup>3</sup>/<sub>4</sub> (19 mm) throw, 1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub> (28.5 x 57 mm) faceplate  
For use in double door or electric strike applications



**GX1LE334**

Backset extension to 3<sup>3</sup>/<sub>4</sub> (95 mm); use with 2<sup>3</sup>/<sub>8</sub> (60 mm) backset latch

**GX1LE500**

Backset extension to 5" (127 mm); use with 2<sup>3</sup>/<sub>8</sub> (70 mm) backset latch




**Type**

- Cylindrical lock

**Certifications**

- Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2
- cULus listed, 3hr fire-rating
- UL 10C Positive Pressure Rating
- 5 Year limited warranty

**Door Thickness** • 1 $\frac{3}{8}$ –1 $\frac{3}{4}$ " (35–44.5 mm)

**Handing** • Non handed

**Backset**

- 2 $\frac{3}{4}$ " (70 mm)
- 2 $\frac{5}{8}$ " (60 mm) – available
- 3 $\frac{3}{4}$ " (95 mm) – available
- 5" (127 mm) – available

**Spring Latch** • Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw

**Faceplate**

- Mortise type, square corners
- 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm)
- 2 $\frac{3}{8}$ " (60 mm) backset: 1 x 2 $\frac{1}{4}$ " (25.4 x 57 mm)

**Strike** • ASA Strike

**Trim**

- Brass or stainless steel knob\*
- Brass or stainless steel rose\*
- Rose diameter: 3" (76 mm)

(\* Material dependant on finish.)

**Chassis**

- Concealed mounting plate and screws

**Preparation**

- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
- Edge bore: 1" (25.4 mm)

**Cylinder**

- Solid brass, 6-pin
- Schlage "C" keyway, 2 keys
- Removable, rekeyable

*Other keyways and keying options available, including CX5 high security*

<b>Functions</b>	10 Passage	60 Store
	15 Exit	70 Classroom
	17 Dummy, single	79 Institution exit
	32 Patio	80 Storeroom*
	42 Privacy	82 Institution/utility
	53 Entry*	94 Hotel/motel

*(\* Available without core cylinder (LC))*

**Finish** C3–Polished brass, C32D–Stainless steel

*Other finishes available by special order*

TL	53	B	C32D	238
SERIES	FUNCTION	STYLE	FINISH	OPTION <sup>1</sup>

(1) OPTION: 238 2-3/8IN (60MM) BACKSET LC-LESS CORE (53 & 80)




## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	STYLE	FINISH <sup>1</sup>	/ CASE
TL	10	Passage	B	C3, C32D
TL	15	Exit	B	C3, C32D
TL	17	Dummy, single	B	C3, C32D
TL	32	Patio (includes full-lip D-Strike)	B	C32D
TL	42	Privacy	B	C3, C32D
TL	53	Entry 	B	C3, C32D
TL	53 LC	Entry, housing only (less core) 	B	C32D
TL	60	Store 	B	C32D
TL	70	Classroom 	B	C3, C32D
TL	79	Institution / exit 	B	C32D
TL	80	Storeroom 	B	C3, C32D
TL	80 LC	Storeroom, housing only (less core) 	B	C32D
TL	82	Institution / utility 	B	C32D
TL	94	Hotel 	B	C32D

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

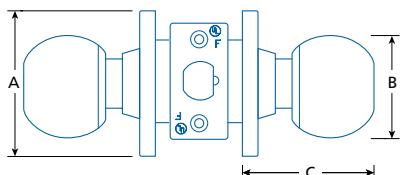

	A	B	C
<b>TL B</b>	3 (76)	2 1/8 (57)	2 5/8 (67)

IN (MM)

## PARTS & ACCESSORIES



**9102**

Full lip D-Strike, adjustable tab; square corners:  
1 3/4 x 2 1/4" (44.5 x 57 mm)



**9106**

T-Strike, square corners:  
1 1/8 x 2 3/4" (28.5 x 70 mm)



**9106NH**

T-Strike, no hole; square corners:  
1 1/8 x 2 3/4" (28.5 x 70 mm)



**ASA-T**

ASA strike, adjustable tab; square corners



**ASANH**

ASA strike, no hole; square corners



**TL020**

Plastic spacer for latches with 1 x 2 1/4" (25.4 x 57 mm) faceplate to fit preparations for 1 1/8 x 2 1/4" (28.5 x 57 mm) faceplates



**TL013**

Backset extension to 3 3/4" (95 mm);  
Use with 2 5/8" (60 mm) backset latch



**TL014**

Backset extension to 5" (127 mm);  
Use with 2 5/8" (70 mm) backset latch Use with  
2 3/4" (70 mm) backset latch



**TL001**

Passage latch: 2 5/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL003**

Passage latch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL010**

Privacy latch: 2 3/4" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL002**

Privacy latch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL005**

Deadlatch 2 5/8" (60 mm) backset  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL004**

Deadlatch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL006**

Deadlatch: 5" (127 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL011** (for function 32 or 94)

Deadlatch: 2 5/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL012** (for function 32 or 94)

Deadlatch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate




**Type**

- Cylindrical lock

**Certifications**

- Conforms to ANSI/BHMA A156.2, Series 4000, Grade 2
- cULus listed, 3hr fire-rating
- UL 10C Positive Pressure Rating
- 10 Year limited warranty

**Door Thickness**

- 1 $\frac{3}{8}$ –2 $\frac{1}{4}$ " (35–57 mm)

**Handing**

- Non handed

**Backset**

- 2 $\frac{3}{4}$ " (70 mm)
- 2 $\frac{5}{8}$ " (60 mm) – available
- 3 $\frac{3}{4}$ " (95 mm) – available
- 5" (127 mm) – available

**Spring Latch**

- Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw

**Faceplate**

- Mortise type, square corners
- 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)
- 2 $\frac{3}{8}$ " (60 mm) backset : 1x2 $\frac{1}{4}$ " (25.4x57mm)

**Strike**

- ASA Strike

**Trim**

- Brass or stainless steel knob\*
- Brass or stainless steel rose\*
- Rose diameter: 3" (76 mm)

(\* Material dependant on finish.

**Chassis**

- Concealed mounting plate and screws

**Preparation**

- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
- Edge bore: 1" (25.4 mm)

**Cylinder**

- Solid brass, 6-pin
- Schlage "C" keyway, 2 keys
- Removable, rekeyable

*Other keyways and keying options available.*

**Functions**

00	Dummy, single	70	Classroom*
10	Passage	80	Storeroom*
40	Privacy	89	Exit
53	Entry*		

*(\* Available without core cylinder (LC)*

**Finish**
**C3**–Polished brass, **C32D**–Stainless steel

*Other finishes available by special order*

T2B	53	C32D	238
SERIES	FUNCTION	FINISH	OPTION <sup>1</sup>

(1) OPTION: 238 2-3/8IN (60MM) BACKSET LC-LESS CORE (53 & 80)




## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/ CASE
T2B	00 Dummy, single	C3, C32D	100
T2B	10 Passage	C3, C32D	20
T2B	40 Privacy	C3, C32D	20
T2B	53 Entry 	C3, C32D	20
T2B	53 LC Entry, housing only (less core) 	C3, C32D	20
T2B	70 Classroom 	C3, C32D	20
T2B	70 LC Classroom, housing only (less core) 	C32D	20
T2B	80 Storeroom 	C3, C32D	20
T2B	80 LC Storeroom, housing only (less core) 	C3, C32D	20
T2B	89 Exit	C3, C32D	20

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

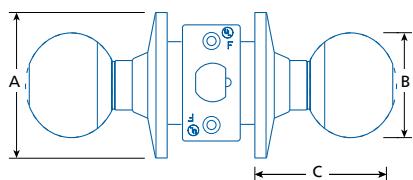

	A	B	C*
<b>B (NON KEYED)</b>		3 (76)	2 $\frac{5}{8}$ –3 $\frac{1}{16}$ (67–78)
<b>B (KEYED)</b>			2 $\frac{9}{16}$ –3 (65–76)

IN (MM) (\* ) DIMENSION VARIES WITH DOOR THICKNESS.

## PARTS & ACCESSORIES



**9102**

Full lip D-Strike, adjustable tab; square corners:  
1 $\frac{1}{4}$  x 2 $\frac{1}{4}$ " (44.5 x 57 mm)



**9106**

T-Strike, square corners:  
1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (28.5 x 70 mm)



**9106NH**

T-Strike, no hole; square corners:  
1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (28.5 x 70 mm)



**ASA-T**

ASA strike, adjustable tab; square corners



**ASANH**

ASA strike, no hole; square corners



**TL020**

Plastic spacer for latches with 1 x 2 1/4" (25.4 x 57 mm) faceplate to fit preparations for 1 1/8 x 2 1/4" (28.5 x 57 mm) faceplates



**TL013**

Backset extension to 3 3/4" (95 mm);  
Use with 2 5/8" (60 mm) backset latch



**TL014**

Backset extension to 5" (127 mm);  
Use with 2 3/4" (70 mm) backset latch Use with  
2 5/8" (70 mm) backset latch



**TL001**

Passage latch: 2 5/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL003**

Passage latch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL010**

Privacy latch: 2 5/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL002**

Privacy latch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL005**

Deadlatch 2 5/8" (60 mm) backset  
1 x 2 1/4" (25.4 x 57 mm) faceplate



**TL004**

Deadlatch: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



**TL006**

Deadlatch: 5" (127 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate





IL80EMC15KDS shown,  
Storeroom, double lock

**Type** • Interconnected cylindrical lock

**Certifications** • Conforms to ANSI/BHMA A156.12, Grade 2  
 • cULus listed, 3 hour fire-rating  
 • UL10C Positive Pressure Rating  
 • Meets ADA requirements  
 • 1 Year limited warranty

**Door Thickness** •  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm)

**Handing** • Non handed

**Backset** •  $2\frac{3}{4}$ " (70 mm)  
 •  $2\frac{3}{8}$ " (60 mm) – available

**Spring Latch** • Stainless steel  
 •  $\frac{1}{2}$ " (12.7 mm) throw

**Deadbolt** • Solid brass with hardened steel security pin  
 •  $1$ " (25.4 mm) throw

**Faceplate** • Mortise type, square corners  
 •  $1\frac{1}{8}\times 2\frac{1}{4}$ " (28.5 x 57 mm)

**Strikes** • T-Strike:  $1\frac{1}{8}\times 2\frac{3}{4}$ " (28.5 x 70 mm)  
 • Deadbolt strike:  $1\frac{1}{8}\times 2\frac{3}{4}$ " (28.5 x 70 mm)  
 • Plastic dust-boxes

**Interior** • Square (S):  $8\times 3\frac{1}{8}$ " (203 x 79 mm)

**Escutcheon** • Round (R):  $8\frac{7}{8}\times 3\frac{1}{8}$ " (225 x 79 mm)

**Exterior** • Square:  $8\times 3\frac{1}{8}$ " (203 x 79 mm)

**Escutcheon** • Round:  $8\frac{7}{8}\times 3\frac{1}{8}$ " (225 x 79 mm)  
*Not included, sold separately*

**Chassis** • Free-spinning deadbolt cylinder collar  
 • Steel deadbolt cylinder housing  
 • Exposed mounting screws  
 • Single action egress

**Preparation** • 4" (102 mm) centre-to-centre installation  
 • Cross bore:  $2\frac{1}{8}$ " (54 mm)  
 • Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
 • Schlage "C" keyway, 2 keys  
 • Removable, rekeyable

*Other keyways and keying options available, including CX5 high security*

**Functions** 10 Passage, single lock  
 80 Storeroom, double lock

**Lever Styles** EM—Standard return

*Other lever styles available by special order*

**Finish** C15—Satin nickel

*Other finishes available by special order*

IL	10	EM	C15	KD	S	238
SERIES	FUNCTION	STYLE	FINISH	KEYING	TRIM	OPTION <sup>(1)</sup>

(1) OPTIONS: 238 2-3/8IN (60MM) BACKSET




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
 VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2021-09.

## SELECTION GUIDE

SERIES	FUNCTION	LEVER	INTERIOR TRIM	FINISH	/CASE
IL	10 Passage, single lock entry	EM	R, S	C15	10
IL	80 Storeroom, double lock entry	EM	S	C15	10

OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 • KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

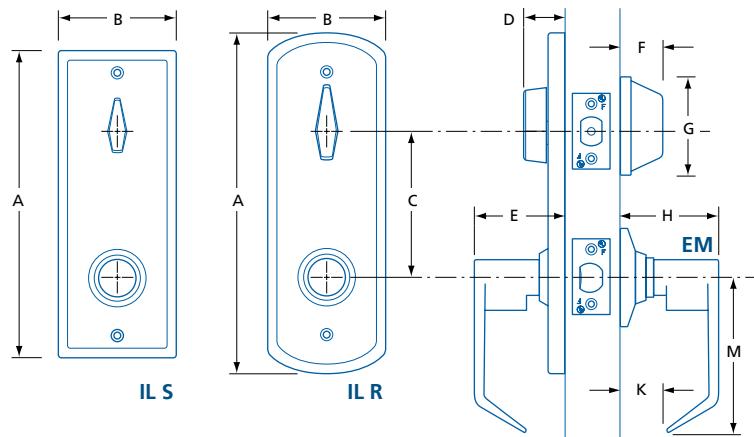

	A	B	C	D	E	F	G	H*	K*	M	P	
IL R	EM	8 $\frac{7}{8}$ (225.4)	3 $\frac{1}{8}$ (79)	4 (101.6)	1 $\frac{1}{16}$ (27)	2 $\frac{9}{16}$ (65)	1 $\frac{1}{16}$ (27.2)	2 $\frac{9}{16}$ (65)	2 $\frac{5}{16}$ (59)	$\frac{3}{8}$ (9.5)	4 (102)	2 $\frac{9}{16}$ (65)
IL S	EM	8 (203.2)	3 $\frac{1}{8}$ (79)	4 (101.6)	1 $\frac{1}{16}$ (27)	2 $\frac{1}{8}$ (54)	1 $\frac{1}{16}$ (27.2)	2 $\frac{9}{16}$ (65)	2 $\frac{5}{16}$ (59)	$\frac{3}{8}$ (9.5)	4 (102)	2 $\frac{9}{16}$ (65)

IN (MM)

(\* ) DIMENSION MAY VARY DUE TO DOOR THICKNESS

NOTE: EXTERIOR ESCUTCHEON PLATES ARE THE SAME SIZE AS THE INTERIOR ONES (SOLD SEPARATELY)

## PARTS & ACCESSORIES



**ILPRC15**

Exterior escutcheon, round  
 $8\frac{7}{8} \times 3\frac{1}{8} \times \frac{7}{16}$ " (225 x 79 x 11 mm)  
*Not included*



**ILPSC15**

Exterior escutcheon, square  
 $8 \times 3\frac{1}{8} \times \frac{7}{16}$ " (203 x 79 x 11 mm)  
*Not included*





**Type** • Interconnected tubular lock

**Certifications** • Conforms to ANSI/BHMA A156.12, Grade 2  
 • cULus listed, 3 hour fire-rating  
 • UL10C Positive Pressure Rating  
 • Lever meets ADA requirements  
 • 1 Year limited warranty

**Door Thickness** •  $1\frac{3}{4}$ – $2\frac{1}{8}$ " (45–55 mm)

**Handing** • Non handed

**Backset** •  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm), adjustable

**Spring Latch** • Stainless steel  
 •  $\frac{1}{2}$ " (12.5 mm) throw

**Deadbolt** • Steel with hardened steel security pin  
 •  $1$ " (25.4 mm) throw

**Faceplate** • Mortise type, square corners  
 •  $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm)

**Strikes** • T-Strike:  $1\frac{1}{8} \times 2\frac{3}{4}$ " (28 x 70 mm)  
 • Deadbolt strike:  $1\frac{1}{8} \times 2\frac{3}{4}$ " (28 x 70 mm)  
 • Plastic dust-boxes

**Interior Escutcheon** •  $8\frac{1}{2} \times 2\frac{3}{4}$ " (216 x 70 mm)

**Chassis** • Concealed mounting screws  
 • Visible lever set-screws  
 • Single action egress

**Preparation** •  $5\frac{1}{2}$ " (140 mm) centre-to-centre installation  
 • Cross bore:  $2\frac{1}{8}$ " (54 mm)  
 • Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
 • Schlage "C" keyway, 2 keys

**Function** 55 Suite entry, single lock, with single action egress

**Lever Styles** L-Lina, LS-Lina (square rose)

*Other lever styles available by special order*

**Finish** 15–Satin nickel, 19–Matte black

*Other finishes available by special order*


T2 IL	55	L	–	15	KD	M
SERIES	FUNCTION	STYLE	FINISH	KEYING	LATCH	



## SELECTION GUIDE

SERIES	FUNCTION	LEVER	FINISH	/CASE
T2 IL	55 Suite entry, single lock, with single action egress	L, LS	15, 19	10

OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
• KEYED FUNCTION

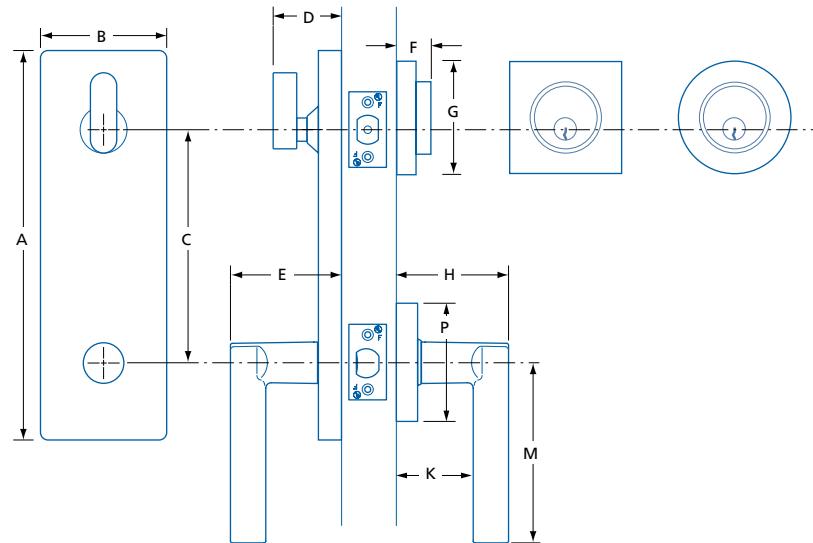

	A	B	C	D	E	F	G	H	K	M	P
T2 IL	8½ (216)	2¾ (70)	5½ (140)	1½ (38)	2½ (63.5)	¾ (19)	2½ (63.5)	2½ (63.5)	1½ (41.3)	4 (101.6)	2½ (63.5)

IN (MM)





**Certifications**

- Conforms to ANSI/BHMA A156.36, Grade 1
- cULus listed, 3hr fire-rating
- 10 Year limited warranty

**Door Thickness**

- 1½–2" (40–51 mm)
- Kit for 2¼" (57 mm) – available

**Handing**

- Non handed

**Backset**

- 2¾" (70 mm)
- 2½" (60 mm) – available

**Deadbolt**

- Solid brass with hardened steel security pin
- 1" (25.4 mm) throw

**Faceplate**

- Mortise type, square corners
- 1½x2¼" (29x57 mm)

**Strikes**

- Wood & steel frame strikes; square corners
- 1½x2¾" (29x70 mm)
- Plastic dust-box

*Other strikes available*

**Chassis**

- Free-spinning cylinder collar
- Steel cylinder housing
- Concealed mounting screws

**Preparation**

- Cross bore: 2½" (54 mm)
- Edge bore: 1" (25.4 mm)

**Cylinder**

- Solid brass, 6-pin
- Schlage "C" keyway, 2 keys
- Removable, rekeyable
- Small format interchangeable core (SFC) model – available\*

*Other keyways and keying options available, including CX5 high security. (\*) BEST® and CX5® cores sold separately.*

**Functions**

- 51 Single cylinder, thumb-turn
- 60 Double cylinder
- 70 Single cylinder, thumb-turn (Classroom)

*Less Core (LC) available – see selection guide*

**Finish**

- C15–Satin nickel, C15A–Antique nickel, C26D–Satin chrome, C3–Polished brass, V3–Polished brass (Endurance)

*Other finishes available by special order*

GX1A	51	C26D	LC
SERIES	FUNCTION	FINISH	OPTION <sup>(1)</sup>

(1) OPTIONS: 238-2 3/8IN (60MM) BACKSET LC-LESS CORE (51 ONLY) WEI-WEISER KEYWAY




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-12.

## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
<b>GX1A</b>	51 Single cylinder, thumb-turn	C15, C15A, C26D, C3, C5, V3	12
<b>GX1A</b>	51LC Single cylinder, thumb-turn, less core	C26D	12
<b>GX1A</b>	51WEI Single cylinder, thumb-turn, 5-pin Weiser keyway	C26D, C3, C5	12
<b>GX1A</b>	51IC Single cylinder SFIC, thumb-turn, 7-pin BEST® F core included	C15, C26D	12
<b>GX1A</b>	60 Double cylinder	C26D	12
<b>GX1A</b>	60IC Double cylinder SFIC, 7-pin BEST® F core included	C26D	12
<b>GX1A</b>	70 Single cylinder, thumb-turn (Classroom)	C26D	12
<b>GX1A</b>	70IC Single cylinder SFIC, thumb-turn, 7-pin BEST® F core included (Classroom)	C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
● KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

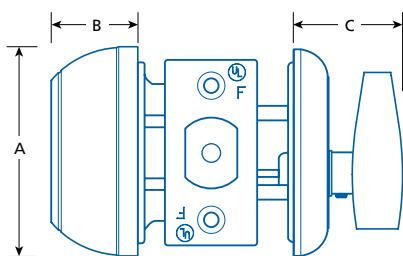

	A	B	C
<b>GX1A</b>	2 <sup>15</sup> / <sub>32</sub> (63)	1 <sup>1</sup> / <sub>16</sub> (27)	1 <sup>1</sup> / <sub>32</sub> (32.3)

IN (MM)

## PARTS & ACCESSORIES




**9111**

Steel frame strike; square.  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (29 x 70 mm)

**9807**

CX5 high security SFIC core, 7 pin, 0 bitted



**LM9111**

Steel (square) and wood (round) frame security strikes.  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (29 x 70 mm)

**CBI-BF6KD-26D**

BEST® F type SFIC core, 6 pin, 0 bitted

**CBI-BF7KD-26D**

BEST® F type SFIC core, 7 pin, 0 bitted



**9118**

Wood frame strike; square.  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (29 x 70 mm)



**9118R**

Wood frame strike; round.  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (29 x 70 mm)



**TL007**

Deadbolt: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1 x 2<sup>1</sup>/<sub>4</sub>" (25.4 x 57 mm) faceplate

**TL008**

Deadbolt: 2<sup>3</sup>/<sub>8</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub> x 2<sup>1</sup>/<sub>4</sub>" (28.5 x 57 mm) faceplate



**TLA85052**

Longer spindle and screw kit for 2<sup>1</sup>/<sub>4</sub>" (57 mm) thick door. For GX1A51 or GX1A70.

**TLA93110**

Longer spindle and screw kit for 2<sup>1</sup>/<sub>4</sub>" (57 mm) thick door. For GX1A60.





**FHA 421**  
Privacy with indicator

**Certifications** • Conforms to ANSI/BHMA A156.36, Grade 2  
• cULus listed, 3hr fire-rating  
• 1 Year limited warranty

**Door Thickness** •  $1\frac{1}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm)

**Handing** • Non handed

**Backset** •  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) adjustable

**Deadbolt** • Solid brass with hardened steel security pin  
• 1" (25.4 mm) throw

**Faceplate** • Mortise type, square corners  
•  $1\frac{1}{8} \times 2\frac{1}{4}$ " (29x57 mm)

**Strike** • 2-piece security strike (wood/metal frame)  
•  $1\frac{1}{8} \times 2\frac{3}{4}$ " (29x70 mm), square corners  
• Plastic dust-box

*Other strikes available*

**Chassis** • Free-spinning cylinder collar  
• Steel cylinder housing  
• Exposed mounting screws

**Preparation** • Cross bore:  $2\frac{1}{8}$ " (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable

*Other keyways and keying options available, including CX5 high security*

**Functions** **421** Privacy with indicator  
**51** Single cylinder, thumbturn  
**60** Double cylinder

**Finish** C26D–Satin chrome, C3–Polished brass,  
C19–Matte black

*Other finishes available by special order*


FHA	51	C26D
SERIES	FUNCTION	FINISH



## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
FHA	42I Privacy, with indicator*	C26D, C19	24
FHA	51 Single cylinder, with thumbturn	C26D, C3	24
FHA	60 Double cylinder	C26D, C3	24

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 \* KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE (\* NOT FIRE-RATED)

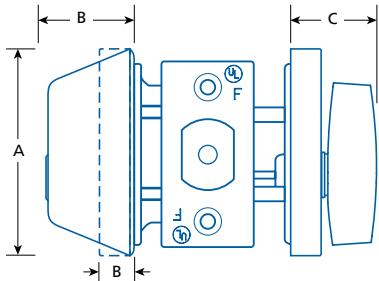

	A	B	C
FHA	2 <sup>9</sup> / <sub>16</sub> (65)	1 (25.4)	1 (25.4)
FHA 42I	2 <sup>1</sup> / <sub>2</sub> (63.5)	3/8 (10)	13/16 (30)

IN (MM)

## PARTS & ACCESSORIES



**9111**

Steel frame strike; square.  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (29 x 70 mm)



**9118**

Wood frame strike; square.  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (29 x 70 mm)

**9118R**

Wood frame strike; round.  
1<sup>1</sup>/<sub>8</sub> x 2<sup>3</sup>/<sub>4</sub>" (29 x 70 mm)





**TLA 421**  
Privacy with indicator

**Certifications**

- Conforms to ANSI/BHMA A156.36, Grade 2
- cULus listed, 3hr fire-rating\*
- 5 Year limited warranty

(\* Except privacy model 421)

**Door Thickness**

- 1 3/8"–1 3/4" (35–44.5 mm)
- SFIC Model: 1 1/16"–2" (40–51 mm)
- Kit for 2 1/4" (57 mm) – available

**Handing**

- Non handed

**Backset**

- 2 3/4" (70 mm)
- 2 3/8" (60 mm) – available
- 2 3/8"–2 3/4" (60–70 mm) adjustable – available

**Deadbolt**

- Solid brass with hardened steel security pin
- 1" (25.4 mm) throw

**Faceplate**

- Mortise type, square corners
- 1 1/8" x 2 1/4" (29 x 57 mm)

**Strike**

- 2-piece security strike (wood/metal frame)
- 1 1/8" x 2 3/4" (29 x 70 mm), square corners
- Plastic dust-box

*Other strikes available*

**Chassis**

- Free-spinning cylinder collar
- Steel cylinder housing
- Exposed mounting screws

**Preparation**

- Cross bore: 1 1/2" or 2 1/8" (38 mm or 54 mm)\*
- Edge bore: 1" (25.4 mm)

(\* 1 1/2" (38 mm) installation will negate Grade 2 conformity, but will retain fire-rating.

**Cylinder**

- Solid brass, 6-pin
- Schlage "C" keyway, 2 keys
- Removable, rekeyable
- Small format interchangeable core (SFIC) model – available

*Other keyways and keying options available, including CX5 high security.*

**Functions**

- 421** Privacy with indicator\*
- 51** Single cylinder, thumb-turn
- 57** Thumb-turn only, exterior plate
- 60** Double cylinder
- 70** Single cylinder, thumb-turn (Classroom)

*(\* Emergency unlock by emergency key or flat head screw driver. Emergency key is not included.*

**Finish**

- C19**–Matte black, **C26D**–Satin chrome, **C3**–Polished brass, **C32D**–Satin stainless steel

*Other finishes available by special order*

TLA	51	C32D	-U
SERIES	FUNCTION	FINISH	OPTION <sup>1</sup>

(1) OPTIONS: 238–2 3/8"IN (60MM) BACKSET -U–ADJUSTABLE BACKSET




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-12.

## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
TLA	42I Privacy, with indicator*	26D, 32D	20
TLA	51 Single cylinder with thumb-turn ●	C19, C26D, C3, C32D	20
TLA	51-U Single cylinder with thumb-turn, adjustable backset option ●	C26D, C32D	20
TLA	51IC Single cylinder with thumb-turn (BEST® F, 7-pin SFIC included) ●	C26D, C32D	20
TLA	57 Thumb-turn only with blank exterior plate	C26D	20
TLA	60 Double cylinder ●	C3, C32D	20
TLA	60-U Double cylinder, adjustable backset option ●	C32D	20
TLA	70 Single cylinder, with thumb-turn (Classroom) ●	C32D	20

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 ● KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE (\* CANNOT ACCOMMODATE DOORS THICKER THAN 1-3/4IN (44.5 MM); NOT FIRE-RATED

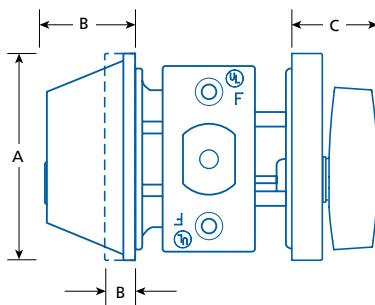

	Ø A	B	C
TLA	2 9/16 (65)	1 1/8 (29)	1 (25)
TLA 42I	2 9/16 (65)	1 1/32 (8.5)	1 (25)
TLA 57	2 9/16 (65)	1 1/32 (8.5)	1 (25)

IN (MM)

## PARTS & ACCESSORIES



**9111**

Steel frame strike; square.  
1 1/8 x 2 3/4" (29 x 70 mm)



**TL007**

Deadbolt: 2 3/8" (60 mm) backset,  
1 x 2 1/4" (25.4 x 57 mm) faceplate

**TL008**

Deadbolt: 2 3/4" (70 mm) backset,  
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

**TLA-LBU**

Deadbolt: 2 3/8-2 3/4" (60-70 mm) adjustable  
backset, 1 x 2 1/4" (25.4 x 57 mm) faceplate



**9118**

Wood frame strike; square.  
1 1/8 x 2 3/4" (29 x 70 mm)

**9118R**

Wood frame strike; round.  
1 1/8 x 2 3/4" (29 x 70 mm)



**TL020**

Plastic spacer for latches with 1 x 2 1/4"  
(25.4 x 57 mm) faceplate to fit preparations  
for 1 1/8 x 2 1/4" (28.5 x 57 mm) faceplates



**9807**

CX5 high security SFIC core, 7 pin, 0 bitted



**TLA85052**

Longer spindle and screw kit for 2 1/4" (57 mm)  
thick door. For TLA 51 or TLA 70 only, cannot  
be used with TLA 42I Indicator model.

**CBI-BF6KD-26D**

BEST® F type SFIC core, 6 pin, keyed different

**CBI-BF7KD-26D**

BEST® F type SFIC core, 7 pin, keyed different



**TLA42-EKEY**

Emergency key for TLA 42I.





**Certifications** • Conforms to ANSI/BHMA A156.36, Grade 1  
• cULus listed, 3hr fire-rating  
• 5 Year limited warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)

**Handing** • Non handed

**Backset** • 2 $\frac{3}{4}$ " (70 mm)  
• 2 $\frac{5}{8}$ " (60 mm) – available

**Spring Latch** • Solid brass deadlatch  
•  $\frac{5}{8}$ " (15.9 mm) throw

**Faceplate** • Mortise type, square corners  
• 1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (29 x 57 mm)  
• Self-adjustable for bevelled doors

**Strikes** • T-type strike, 1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (29 x 70 mm)  
• Wood frame security plate with 3" (76 mm) wood screws  
• Plastic dust-box

**Chassis** • Die-cast trim ring with protective shield  
• Free-spinning solid brass cylinder collar  
• High-strength steel cylinder housing  
• Through bolt mounted  
• Exposed mounting screws

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable  
• Small format interchangeable core (SFC) model – available\*

*Other keyways and keying options available, including CX5 high security. (\*) Special order.*

**Functions** 51 Single cylinder, thumb-turn

**Finish** 26D–Satin chrome

*Other finishes available by special order*

DG1	AN	51	–	26D
SERIES		FUNCTION		FINISH




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-12.

## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
DG1	51 Single cylinder, thumb-turn 	26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

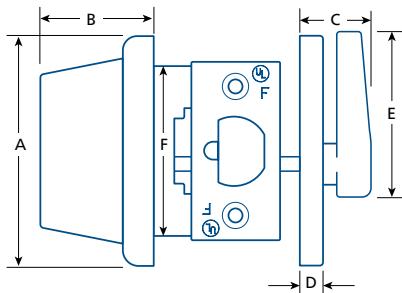

	A	B	C	D	E	F
DG1	2 $\frac{5}{8}$ (67)	1 $\frac{9}{32}$ (32.5)	1 $\frac{5}{16}$ (24)	9 $\frac{3}{32}$ (7)	1 $\frac{3}{4}$ (44.5)	2 (51)

IN (MM)


## PARTS & ACCESSORIES



**DGPL238**

Deadlatch: 2 $\frac{3}{8}$ " (60 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate



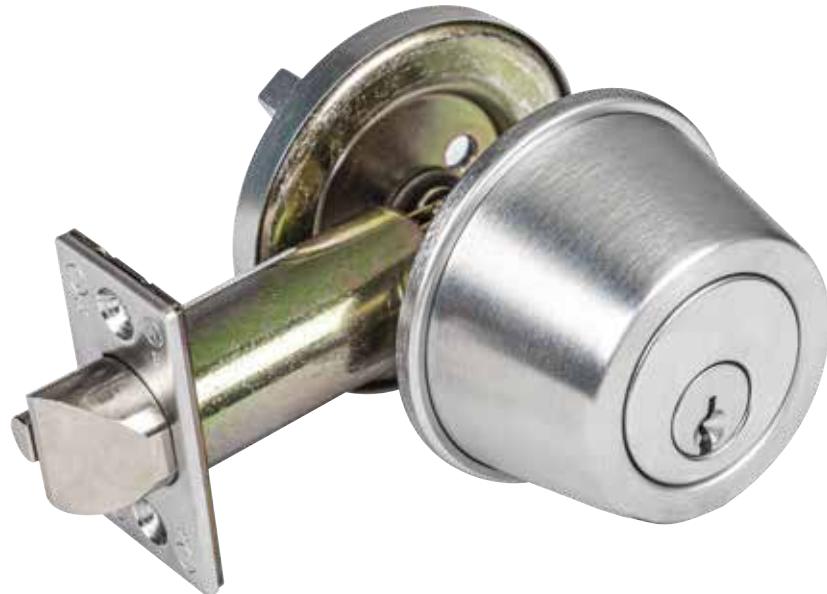

**Certifications** • Conforms to ANSI/BHMA A156.36, Grade 2  
 • cULus listed, 3hr fire-rating  
 • 5 Year limited warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)

**Handing** • Non handed

**Backset** • 2 $\frac{3}{4}$ " (70 mm)  
 • 2 $\frac{7}{8}$ " (60 mm) – available

**Spring Latch** • Solid brass deadlatch  
 •  $\frac{5}{8}$ " (15.9 mm) throw

**Faceplate** • Mortise type, square corners  
 • 1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (29 x 57 mm)  
 • Self-adjustable for bevelled doors

**Strikes** • T-type strike, 1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (29 x 70 mm)  
 • Wood frame security plate with 3" (76 mm) wood screws  
 • Plastic dust-box

**Chassis** • Die-cast trim ring  
 • Free-spinning solid brass cylinder collar  
 • High-strength steel cylinder housing  
 • Through bolt mounted  
 • Exposed mounting screws

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " (54 mm)  
 • Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 6-pin  
 • Schlage "C" keyway, 2 keys  
 • Removable, rekeyable  
 • Small format interchangeable core (SIFC) model – available\*

*Other keyways and keying options available, including CX5 high security. (\*) Special order.*

**Functions** 51 Single cylinder, thumb-turn

**Finish** 26D–Satin chrome

*Other finishes available by special order*


DG2	AN	51	–	26D
SERIES		FUNCTION		FINISH



## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
DG2	51 Single cylinder, thumb-turn 	26D	20

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

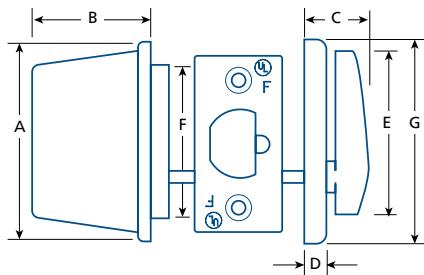

	A	B	C	D	E	F	G
DG2	2 $\frac{5}{8}$ (67)	1 $\frac{9}{32}$ (32.5)	1 $\frac{5}{16}$ (24)	$\frac{9}{32}$ (7)	1 $\frac{3}{4}$ (44.5)	2 (51)	2 $\frac{5}{8}$ (67)

IN (MM)

## PARTS & ACCESSORIES



**DGPL238**

Deadlatch: 2 $\frac{5}{8}$ " (60 mm) backset,  
1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (28.5 x 57 mm) faceplate



BHMA  
CERTIFIED

G1

UL  
LISTED

**Certifications**

- Certified ANSI/BHMA A156.13, Series 1000, Grade 1
- cULus listed, 3hr fire-rating
- UL10C Positive Pressure Rated
- Levers meet ADA (ANSI 117.1) requirements
- 5 Year limited warranty

**Door Thickness**

- 1 1/4" (44.5 mm)
- 2-2 1/4" (51-57 mm) – available

**Handing**

- Handed, field reversible

**Backset**

- 2 3/4" (70 mm)

**Spring Latch**

- Brass, 2 piece anti-friction
- 3/4" (19 mm) throw

**Deadbolt**

- Solid bolt, 2 security pins
- 1" (25.4 mm) throw

**Faceplate**

- 1 1/4 x 8" (32 x 203 mm), square corners
- Adjusts for bevelled doors up to 1/8" (3 mm)

**Strike**

- ANSI strike and dust-box

**Cylinder**

- 6 pin mortise cylinder
- Schlage "C" with 2 keys
- Small format interchangeable core (SFIC) mortise housing available (SFIC not included)

*Other keyways and keying options available, including CX5 high security*

**Sectional Trim**

- Brass lever or knob
- Brass rose
- S-Round: Ø 2 7/16 x 1 1/2" (61.5 x 12.7 mm)
- SQ-Square: 1 7/8 x 1 7/8 x 1 1/2" (48 x 48 x 12.7 mm)

**Escutcheon Trim**

- Brass lever or knob
- Brass escutcheon
- E-Regular 2 x 8 1/4 x 1 1/2" (50 x 205 x 12.7 mm)
- E2-Wide 2 1/2 x 8 1/4 x 1 1/2" (63 x 210 x 12.7 mm)
- E3-Large 2 3/4 x 10 3/4 x 1 1/2" (70 x 273 x 12.7 mm)

**Chassis**

- Rose trim: concealed mounting screws
- Thumb-turn: exposed mounting screws
- Escutcheon: exposed mounting screws
- Single action egress

**Functions**

10	Passage	80	Storeroom
42	Privacy	84	Storeroom w/ deadbolt
42I	Privacy, indicator	170	Dummy, surface*
45	Entry	171	Dummy, thru-bolt*
50	Office	172	Dummy, back-to-back
56	Dormitory		
70	Classroom		

(\* *Sold in pairs.*

**Lever Styles**

A–Apollo, R–Circa, C–Cornell, D–Dartmouth, G–Glasgow, L–Linea, S–Stanford, F–The Flat, XT–Intersect

**Knob Styles**

K–Kent

**Finish**

15–Satin nickel, 19–Matte black,  
26D–Satin chrome

*Other finishes available by special order*

DM	45	L	–	SQ	F	26D
SERIES	FUNCTION	HAND <sup>1</sup>		TRIM	STYLE	FINISH

(1) L–LEFT R–RIGHT



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-10.


## SELECTION GUIDE

SERIES	TRIM	STYLE**	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
DM	S, SQ, E, E2, E3	ALL	10 Passage	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	42 Privacy, with deadbolt	15, 19, 26D	6
DM	E	ALL	42I Privacy indicator, with deadbolt	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	45 Entry, with deadbolt	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	50 Office	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	56 Dormitory, with deadbolt	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	70 Classroom	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	80* Storeroom	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	84* Storeroom, with deadbolt	15, 19, 26D	6
DM	S, SQ	ALL	170 Dummy, single (surface mount)	15, 19, 26D	6
DM	S, SQ	ALL	171 Dummy, single (thru-bolt)	15, 19, 26D	6
DM	S, SQ, E, E2, E3	ALL	172 Dummy, back-to-back	15, 19, 26D	6


(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT  
• KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE – PLEASE CONTACT (\*) ONE-SIDED INSTALLATION MODEL AVAILABLE (\*\*) XT / INTERSECT NOT AVAILABLE WITH ESCUTCHEON

## LEVERS & KNOBS


A–Apollo




C–Cornell




D–Dartmouth




F–The Flat




G–Glasgow




L–Linea




R–Circa




S–Stanford



XT–Intersect



K–Kent



STYLE

A

B

C<sup>1</sup>

A–Apollo*	3 $\frac{1}{16}$ (78)	4 $\frac{5}{8}$ (116)	2 $\frac{1}{16}$ (53)
C–Cornell	2 $\frac{7}{8}$ (73)	5 $\frac{5}{16}$ (134)	5 $\frac{1}{8}$ (16)
D–Dartmouth	2 $\frac{7}{16}$ (61.5)	5 $\frac{7}{8}$ (149)	1 $\frac{1}{16}$ (17)
F–The Flat	2 $\frac{7}{8}$ (73)	5 $\frac{1}{2}$ (139.7)	2 $\frac{3}{16}$ (55.5)
G–Glasgow	2 $\frac{7}{8}$ (73)	5 $\frac{1}{16}$ (128)	2 $\frac{1}{16}$ (52)

IN (MM) (1) ALL ROSES AND ESCUTCHEONS ARE 12.7 (1 $\frac{1}{2}$ ) THICK

STYLE

A

B

C<sup>1</sup>


L–Linea	2 $\frac{13}{16}$ (71.4)	5 (127)	1 $\frac{15}{16}$ (48.4)
R–Circa	2 $\frac{9}{16}$ (65.5)	5 $\frac{1}{2}$ (139.7)	1 $\frac{7}{8}$ (47)
S–Stanford	2 $\frac{9}{16}$ (65.5)	5 $\frac{1}{16}$ (128)	9 $\frac{1}{16}$ (14)
XT–Intersect*	2 $\frac{13}{64}$ (56)	4 $\frac{15}{16}$ (125)	1 $\frac{1}{2}$ (12.7)
K–Kent	2 $\frac{7}{16}$ (61.5)	ø 2 (50.8)	—

(\*) HANDED LEVER, NOT FIELD REVERSIBLE,

(\*\*) SECTIONAL ONLY, NOT AVAILABLE WITH ESCUTCHEON




## LOCK TRIMS

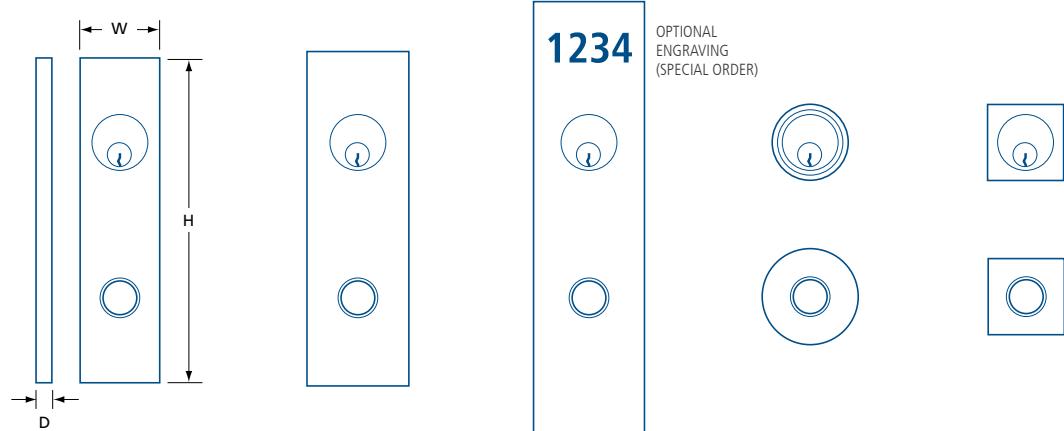

TRIM	E <sup>1</sup>	E2	E3 <sup>2</sup>	S	SQ
Description	Regular escutcheon	Wide escutcheon	Large escutcheon	Round rose	Square rose
Width (W)	2 (50)	2 1/2 (64)	2 3/4 (70)	Ø 2 3/8 (60)	1 7/8 (48)
Height (H)	8 1/16 (205)	8 1/4 (210)	10 3/4 (273)	—	1 7/8 (48)
Depth (D)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)	1/2 (12.7)
Material	Brass	Brass	Brass	Brass	Brass

IN (MM) (1) AVAILABLE WITH PRIVACY INDICATOR-42I (2)OPTIONAL ENGRAVING AVAILABLE-PLEASE CONTACT

## DIMENSIONS

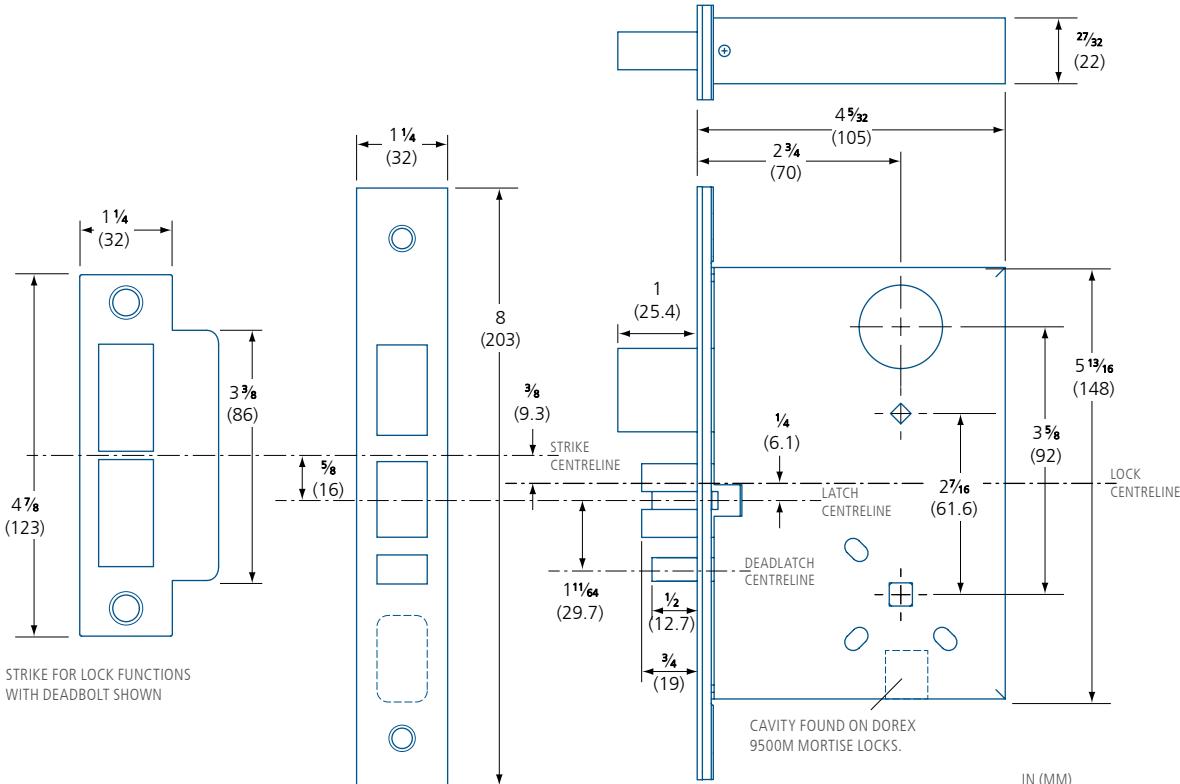

MUST BE INSTALLED ON A DOOR WITH A SOLID LOCK STILE WIDTH OF AT LEAST 5" (127MM) OR WITH APPROPRIATE REINFORCEMENT.

 WHEN USED WITH ELECTRIC STRIKE PLEASE REQUEST ADDITIONAL INFORMATION.



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-10.

**DOREX DM 01.070**

## PARTS & ACCESSORIES



### DM45X-PS

Replacement strike for  $1\frac{3}{4}$  (45) thick door.  
(Functions 42, 45, 56, 84)



### DM80X-PS

Replacement strike for  $1\frac{3}{4}$  (45) thick door.  
(Functions 10, 50, 70, 80)



### DM42X-PE

Mortise lock emergency privacy key; round.  
Includes plate and screws.  
Finish: 15, 19, 26D



### DM42X-PES

Mortise lock emergency privacy key; square.  
Includes plate and screws.  
Finish: 15, 19, 26D



### DM45X-PT

Mortise lock thumbturn; round. Mounting  
screws included.  
Finish: 15, 19, 26D



### DM45X-PTS

Mortise lock thumbturn; square. Mounting  
screws included.  
Finish: 15, 19, 26D



### DM00X-PPRVI

Occupancy indicator. Includes round interior/  
exterior trims for use with privacy (42)  
function. For  $1\frac{3}{4}$  (44.5) thick wood door.  
Mounting hardware included. Finish: 15, 26D



### DM00X-PPRVI

Occupancy indicator. Includes square interior/  
exterior trims for use with privacy (42)  
function. For  $1\frac{3}{4}$  (44.5) thick wood door.  
Mounting hardware included. Finish: 15, 26D



### DM00X-PPRVI-ECYL

Keyed occupancy indicator. Includes round  
interior/exterior trims for use with keyed  
functions 45, 56, or 84. For  $1\frac{3}{4}$  (44.5) thick  
wood door. Mounting hardware and DM00X-  
ECYL cylinder with 2 keys included. Finish:  
15, 26D



### DM00X-PPRVIQ-ECYL

Keyed occupancy indicator. Includes square  
interior/exterior trims for use with keyed  
functions 45, 46, or 84. For  $1\frac{3}{4}$  (44.5) thick  
wood door. Mounting hardware and DM00X-  
ECYL cylinder with 2 keys included. Finish:  
15, 26D



### DM45X-PR

Mortise cylinder collar with spring; round.  
 $1\frac{1}{16} \times 3\frac{3}{8}$  ( $\varnothing 43 \times 9$ )  
Finish: 15, 19, 26D



### DM45X-PRS

Mortise cylinder collar with spring; square.  
 $1\frac{1}{8} \times 1\frac{1}{8} \times 3\frac{3}{8}$  (48 x 48 x 9)  
Finish: 15, 19, 26D



### DM00X-PSCYL

- $1\frac{1}{8}$  (28.6) 5-pin (drilled 6) brass mortise  
cylinder; Schlage "C" with 2 keys.
- For sectional installations on  $1\frac{3}{4}$  (45)  
thick doors.
- Includes DM00X-PCAM.
- Finish: 15, 19, 26D



### DM00X-PECYL

- $1\frac{1}{4}$  (31.8) 5-pin (drilled 6) brass mortise  
cylinder; Schlage "C" with 2 keys.
- For escutcheon installations on  $1\frac{3}{4}$  (45)  
thick doors.
- Includes DM00X-PCAM.
- Finish: 15, 19, 26D



### DM00X-PCAM

Replacement mortise cylinder cam, with  
screws

NOTE: OTHER CYLINDERS MAY REQUIRE A DIFFERENT CAM.  
PLEASE CONTACT IF USING A DIFFERENT CYLINDER. OTHER CAMS  
SOLD SEPARATELY.

### DM00X-PKDT225

Installation kit for 2- $2\frac{1}{4}$  (51-57) thick doors.

- Includes extended thumb-turn, spindle,  
springs, strike and mounting hardware for  
rose or escutcheon trim.
- Mortise cylinder NOT INCLUDED.  
Please contact for details.





\*SHOWN WITH OPTIONAL  
CYLINDER & COLLARS

**Certifications**

- Conforms to ANSI/BHMA A156.36, Grade 1
- cULus listed, 3hr fire-rating
- 5 Year limited warranty

**Door Thickness** • 1 $\frac{3}{4}$ –2" (44.5–51 mm)

**Handing** • Non-handed

**Backset** • 2 $\frac{3}{4}$ " (70 mm)

**Deadbolt** • Solid bolt  
• 1" (25.4 mm) throw

**Faceplate** • 1 $\frac{1}{4}$  x 5 $\frac{9}{16}$ " (31.5 x 142 mm)  
• Square corners

**Strike** • 1 $\frac{1}{8}$  x 3 $\frac{1}{2}$ " (28.9 x 88.9 mm)  
• Square corners  
• Metal dust-box included

**Trim** • Cylinder collar and thumbturn available  
• Round or square styles available

*Sold separately, please contact for details*

**Chassis** • Function 64: concealed mounting  
*All other functions: exposed mounting*

**Cylinder** • Conventional and high security mortise cylinders available  
• Small format interchangeable core (SFIC) mortise housing available (less core)  
*Sold separately, please contact for details*

**Functions** 51 Single cylinder with thumbturn  
55 Thumbturn only  
60 Double cylinder  
64 Cylinder only<sup>1</sup>

<sup>1</sup> For use in rooms with more than one exit

**Finish<sup>1</sup>** 15–Satin nickel; 19–Matte black;  
26D–Satin chrome

*Other finishes available by special order*

*(1) DMDBL strike and faceplate are 26D.*

*Trims are available in 15, 19, or 26D.*

DMDBL  
SERIES


CONFIGURED TO ORDER – PLEASE CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR DETAILS.



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-12.

01.074

## DIMENSIONS

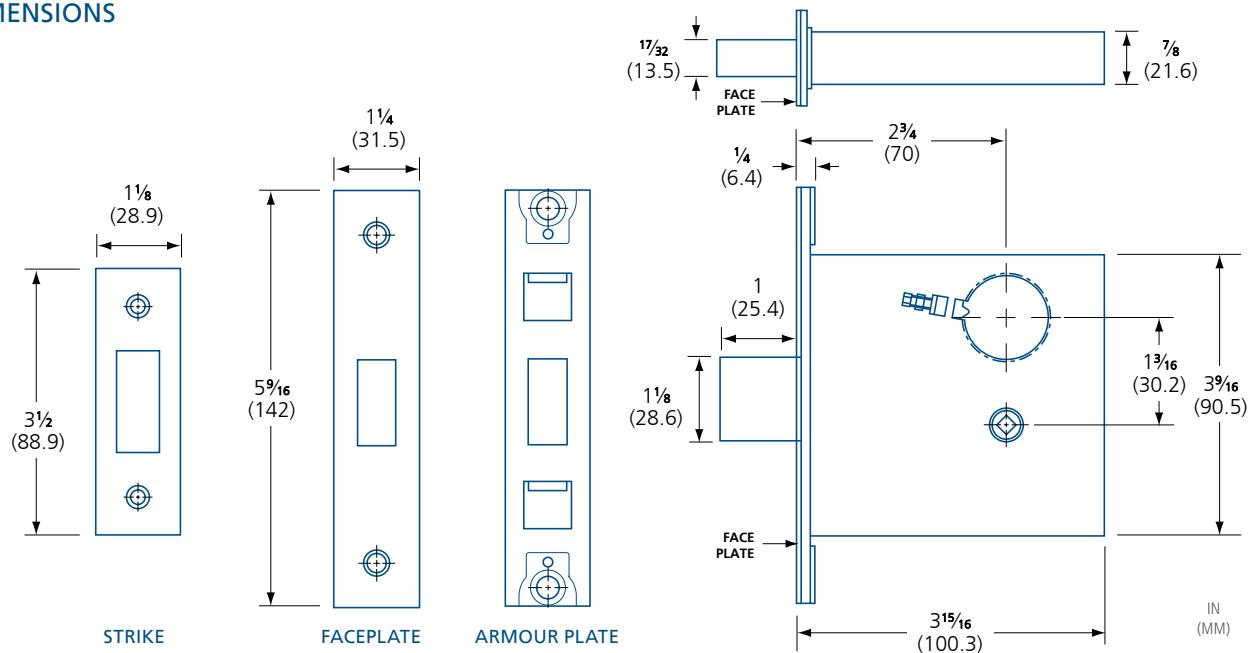

## PARTS & ACCESSORIES



### DM45X-PR

Mortise cylinder collar with spring; round.  
 $\varnothing 1\frac{11}{16} \times \frac{3}{8}$ " (43x9 mm)  
 Finish: 15, 19, 26D



### DM45X-PRS

Mortise cylinder collar with spring; square.  
 $1\frac{7}{8} \times 1\frac{1}{8} \times \frac{3}{8}$ " (48x48x9 mm)  
 Finish: 15, 19, 26D



### DM00X-PSCYL

- 1 1/8" (28.6 mm) 5-pin (drilled 6) brass mortise cylinder; Schlage "C" with 2 keys.
- For installations on 1 3/4" (45 mm) thick doors.
- Includes DM00X-PCAM.
- Finish: 15, 19, 26D

### DM00X-PECYL

- 1 1/4" (31.8 mm) 5-pin (drilled 6) brass mortise cylinder; Schlage "C" with 2 keys.
- For installations on 2" (51 mm) thick doors
- Includes DM00X-PCAM.
- Finish: 15, 19, 26D



### DM00X-PCAM

Replacement mortise cylinder cam, with screws.

NOTE: OTHER CYLINDERS MAY REQUIRE A DIFFERENT CAM.  
 PLEASE CONTACT IF USING A DIFFERENT CYLINDER. OTHER CAMS SOLD SEPARATELY.



### DM45X-PT

Mortise lock thumbturn; round. Mounting screws included. Finish: 15, 19, 26D



### DM45X-PTS

Mortise lock thumbturn; square. Mounting screws included. Finish: 15, 19, 26D



### DM00X-PPRVI

Occupancy indicator. Includes round interior/exterior trims for use with function 55. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware included. Finish: 15, 26D



### DM00X-PPRVIQ

Occupancy indicator. Includes square interior/exterior trims for use with function 55. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware included. Finish: 15, 26D



### DM00X-PPRVI-ECYL

Keyed occupancy indicator. Includes round interior/exterior trims for use with keyed function 51. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware and DM00X-ECYL Cylinder with 2 keys included. Finish: 15, 26D




### DM00X-PPRVIQ-ECYL

Keyed occupancy indicator. Includes round interior/exterior trims for use with keyed function 51. For 1 3/4" (44.5 mm) thick wood door. Mounting hardware and DM00X-ECYL Cylinder with 2 keys included. Finish: 15, 26D



# TECNICA DESIGN

D O R E X

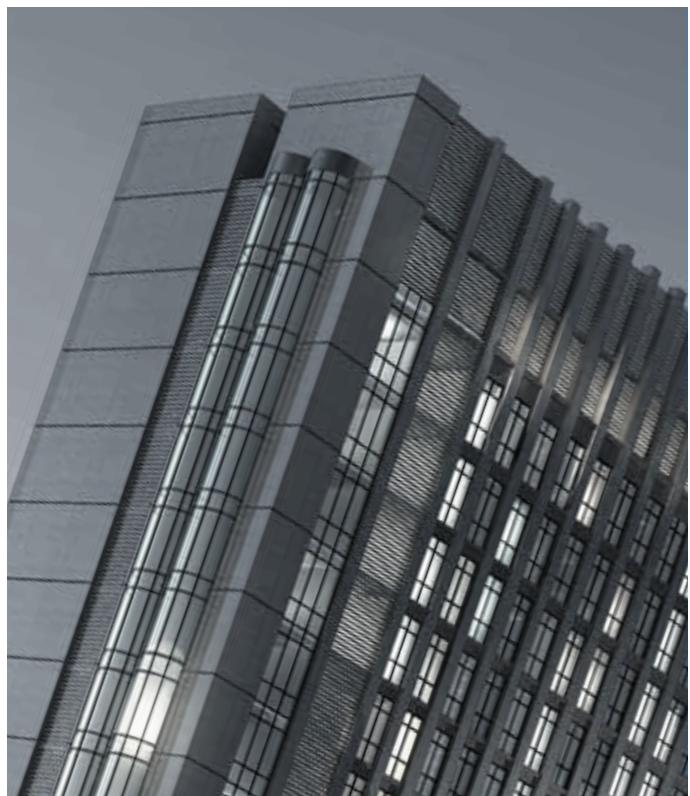

## Mortise Lock Option

All TECNICA DESIGN levers are available with the DOREX DM premium mortise lock for maximum security, 3-hour fire-rating and Grade 1 performance. Excellent for suite, office or home entry and available with a wide variety of functions, trims and escutcheon sizes.

See page 01.070 or speak with your local representative for ordering, product or specification details.



CIRCA

## Interconnected Lock Option

The LINEA lever is available as a premium interconnected lock. The DOREX T2 IL series interconnected tubular lockset combines modern style, security and durability. Recommended as suite entry door locks in multi-unit residential applications. The T2IL offers 3 hour fire-rating and simultaneous retraction of both latch and deadbolt provides easy, panic-proof exiting.

See page 01.032 or speak with your local representative for ordering, product or specification details.



Available with square exterior trim

## Cylindrical Lock Option


TECNICA DESIGN's The Flat lever is available as a Grade 2 quality, 3hr fire-rated, commercial cylindrical lock. Ideal for multi-unit buildings requiring a stylish lever that offers common commercial functions, and can handle the wear and tear of frequent use.

See page 01.021 or speak with your local representative for ordering, product or specification details.



## Levers

- Modern lever styles ideal for contemporary styled homes and residential applications
- Privacy function with auto-release
- Concealed mounting screws
- Available with square or round rose
- All lever styles available with magnetic latches and strikes for seamless, minimalist installations

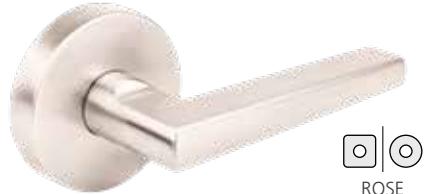


LINEA – ROUND  
SATIN NICKEL

15 19 26 26D



ROSE

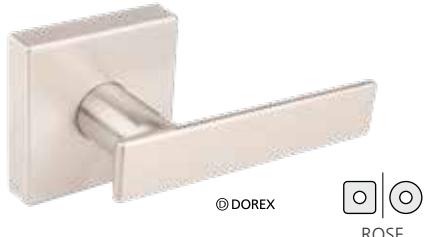

©DOREX



ROSE

THE FLAT – SQUARE  
SATIN NICKEL

15 19 26 26D

NEW



ROSE

STRATA – SQUARE  
SATIN NICKEL

15 19 26D



CIRCA  
SATIN NICKEL

15 19 26 26D

- Conforms to ANSI/BHMA Grade 3
- Meets ADA requirements
- 20 Minute fire-rating when installed with optional listed fire can\*
- Lifetime mechanical warranty
- 10-year limited finish warranty

- Non-handed, zinc die-cast levers
- For doors  $1\frac{5}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Extension kit for  $2\frac{1}{4}$ " (57 mm) thick doors available (#TDK100TE)
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Stainless steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortised faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Full-lip strike with round corners included.
- Concealed mounting screws

(\* Firecan kit must be ordered in conjunction with lockset, not available separately. For use on fire labelled, wood doors only.

- Available with magnetic tubular latch and invisible strike
- ASA strike for metal door frames available
- Other faceplate options available

### AVAILABLE FUNCTIONS

10 Passage  
 42 Privacy, with auto-release  
 -5 Dummy, single (surface / thru-bolt)<sup>1</sup>  
 -3 Handleset interior trim<sup>2</sup>

(1) Can be installed back-to-back using thru-bolts  
 (2) For use with Tecnica Design entry handlesets



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
 VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-05.

## SELECTION GUIDE

100	10	FT	S	15	M	—
SERIES	FUNCTION <sup>1</sup>	STYLE	ROSE <sup>2</sup>	FINISH	LATCH <sup>3</sup>	OPTION <sup>4</sup>


(1) OMIT FUNCTION WHEN ORDERING DUMMY OR HANDLESET TRIM OPTION (2) BLANK : ROUND  
 S: SQUARE (3) M: MORTISE V: DRIVE-IN (4) -3: HANDLE TRIM -5: DUMMY



Firecan kit must be ordered in conjunction with lock, not available separately. For fire labelled wood doors ONLY.

	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE†
CIRCA	CT		●		●	●	●						10
LINEA	LT		●		●	●	●						10
THE FLAT	FT		●		●	●	●						10
STRATA	ST		●		●		●						10

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\*) LIFETIME FINISH WARRANTY (†) DUMMY ARE 20/CASE

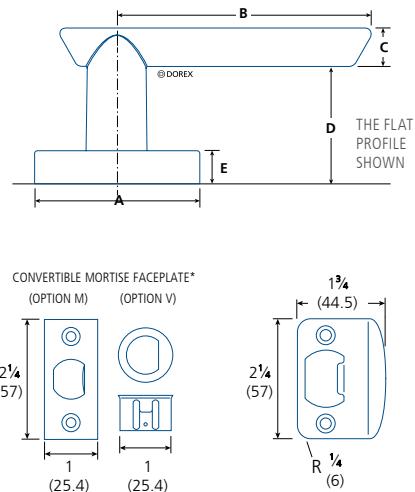

	A	B	C	D	E
CIRCA CT	2 9/16 (64.5)	4 (101.6)	1 1/32 (15)	1 3/4 (45)	1/2 (12.7)
LINEA LT / LTS	2 9/16 (64.5)	4 (101.6)	25/32 (20)	1 9/16 (40)	1/2 (12.7)
THE FLAT FT / FTS	2 9/16 (64.5)	4 (101.6)	37/64 (14.7)	1 25/32 (45.3)	1/2 (12.7)
STRATA ST / STS	2 9/16 (64.5)	4 9/16 (115.9)	7/8 (22)	1 5/8 (42)	1/2 (12.7)

IN (MM)

(\*) Regardless of option ordered, the part required to convert from one option to the other is included.

## Magnetic Latch Option



All TECNICA DESIGN levers are available with magnetic latches and strikes providing the perfect solution for ultra-quiet applications. With no protruding bolt or strike lip, these latches offer a clean, minimalist look for those looking to create unique, flush-to-wall, and snag-free installations free of unsightly latch bolts or strike lips.

- Strike and latch use strong neodymium (rare earth) magnets
- Ergonomic 30-degree activation
- Requires the same tools and preparation as classic tubular latches
- Pair with invisible hinges for unique flush-to-wall door installations
- Not for use in fire-rated applications
- Only available for Passage or Privacy (with auto-release) functions



M6	100	10	FT	S	15	M
BACKSET <sup>1</sup>	SERIES	FUNCTION	STYLE	ROSE <sup>2</sup>	FINISH	LATCH

(1) M6: 2 9/16IN (60MM) FIXED BACKSET, M7: 2 3/4IN (70MM) FIXED BACKSET  
 (2) 10: PASSAGE, 42: PRIVACY (3) BLANK : ROUND, S: SQUARE



## Entry Handlesets

- Reliable, quality modern entry handlesets for residential homes
- Concealed mounting screws
- Includes Linea interior lever and matching round or square thumbturn
- Interior lever can be swapped with any other Tecnica Design lever<sup>1</sup>

(1) Availability may vary, please contact your local Dorex representative.

- Conforms to ANSI/BHMA Grade 3
- 25-year mechanical warranty
- 5-year limited finish warranty
- Non-handed, zinc die-cast exterior trim
- For doors  $1\frac{3}{4}$ – $2\frac{1}{4}$ " (44.5–57 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortised faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Weiser 5-pin brass cylinder in steel housing with 2 keys
- Full-lip strike and deadbolt strike for wood door frames included

### AVAILABLE FUNCTIONS

**T401** Entry  
(single cylinder w/ thumbturn)



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-09.


## SELECTION GUIDE

T401	PT	LTS	15	KD	W
SERIES	STYLE <sup>1</sup>	TRIM <sup>2</sup>	FINISH	KEYING	LATCH

(1) AR: ARCO; DT: DELTA; PT: PLATO (2) LTS: LINEA-SQUARE


	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	C5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE
ARCO	AR		●			●	●						6
DELTA	DT		●		●		●						6
PLATO	PT		●		●	●	●						6

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\*) LIFETIME FINISH WARRANTY

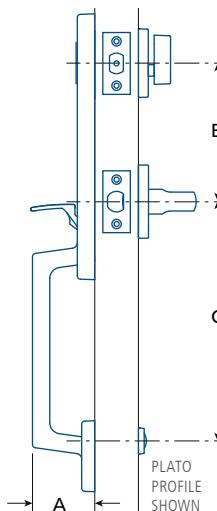

	A	B	C
ARCO AR	2 $\frac{1}{16}$ (68)	5 <sup>1</sup> (127)	8 $\frac{3}{4}$ –10 $\frac{3}{8}$ <sup>2</sup> (222–264)
DELTA DT	2 $\frac{1}{8}$ (54)	5 <sup>1</sup> (127)	8 $\frac{13}{32}$ (214)
PLATO PT	2 $\frac{1}{16}$ (68)	5 $\frac{1}{2}$ (140)	8 $\frac{3}{4}$ –10 $\frac{3}{8}$ <sup>2</sup> (222–264)

IN (MM) (1) RECOMMENDED DISTANCE (2) ADJUSTABLE

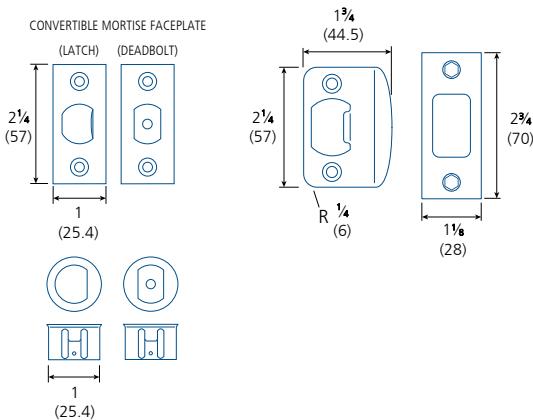

## Deadbolt Locks

- TECNICA DESIGN deadbolts are a blend of aesthetics, security, and dependability
- ANSI/BHMA Grade 3 Security, excellent for suite entry doors and offices
- Concealed mounting screws
- Can be keyed to insert into any key system.
- Can accommodate CX5 High Security cylinders for enhanced security

- Certified ANSI/BHMA Grade 3.
- 20 Minute fire-rating when installed with optional listed fire can\*
- 25-year mechanical warranty
- 5-year limited finish warranty
- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Extension kit for  $2\frac{1}{4}$ " (57 mm) thick doors available (#[TLA85052](#))
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortised faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism.
- Removable brass cylinder in steel housing with 2 keys
- Security strikes for wood and metal door frames included

(\* ) Firecan kit must be ordered in conjunction with lock, not available separately. For use on fire labelled, wood doors only.

- Keying options available – including CX5 high security cylinders
- Other faceplate options available

### AVAILABLE FUNCTIONS

51 Single cylinder with thumbturn



GIRO  
SATIN NICKEL  
15 19 26 26D



QUADRA  
SATIN NICKEL  
15 19 26 26D



## SELECTION GUIDE

201	51	TR	15	KD	M
SERIES <sup>1</sup>	FUNCTION	STYLE	FINISH	KEYING <sup>2</sup>	LATCH <sup>3</sup>

(1) 201: WEISER 5-PIN 202: SCHLAGE 6-PIN KEYWAY (2) KA: KEYED ALIKE KD: KEYED DIFFERENT  
(3) M: MORTISE V: DRIVE-IN ONLY




Firecan kit must be ordered in conjunction with deadbolt, not available separately. For fire labelled wood doors ONLY.

Full keying services available – please contact for details


STYLE	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	32D SATIN S.STEEL	3 POLISHED BRASS	4 SATIN BRASS	5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE
GIRO TR			●		●	●	●						24
QUADRA TS			●		●	●	●						24

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\*LIFETIME FINISH WARRANTY

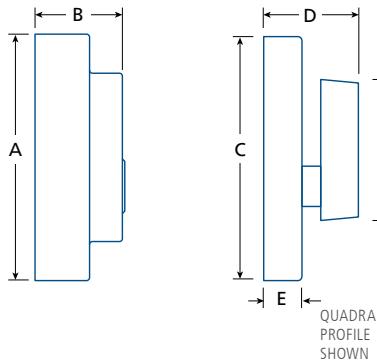

	A	B	C	D	E	F
GIRO TR	∅ (64)	15/16 (23.8)	21/2 (64)	1 (25.4)	3/8 (9)	17/8 (47)
QUADRA TS	29/16 (64.5)	15/16 (23.8)	29/16 (64.5)	1 (25.4)	3/8 (9)	13/4 (45)

IN (MM)

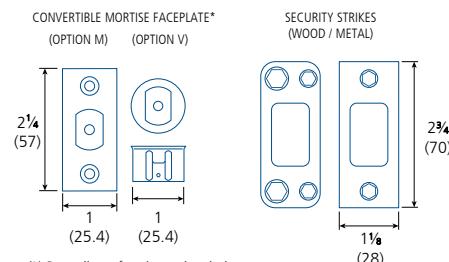

(\*) Regardless of option ordered, the part required to convert from one option to the other is included.

## PARTS &amp; ACCESSORIES



## 200T-SWA

Replacement thumbturn setscrew, spring washer, and hex key.



# TECNICA DESIGN

D O R E X



## MAGNETIC LATCHES

Tecnica Design magnetic latches provide the perfect solution for ultra-quiet residential applications. With no protruding bolt or strike lip, these latches offer a clean, minimalist look to homeowners looking to create unique flush-to-wall installations free of unsightly strikes or bolts.

## Magnetic Latches

All TECNICA DESIGN levers are available with magnetic latches and strikes providing the perfect solution for ultra-quiet applications. With no protruding bolt or strike lip, these latches offer a clean, minimalist look for those looking to create unique, flush-to-wall, and snag-free installations free of unsightly latch bolts or strike lips.


- Strike and latch use strong neodymium (rare earth) magnets.
- Ergonomic 30-degree activation.
- Requires the same tools and door preparation as classic tubular latches.
- Pair with invisible hinges for unique flush-to-wall door installations.
- Not for use in fire-rated applications. Cannot be used with a DOREX firecan kit.
- Only available for Passage or Privacy (with auto-release) functions.



Not fire rated.

Mortise faceplate only, not convertible to drive-in.


### HOW DOREX MAGNETIC LATCHES WORK

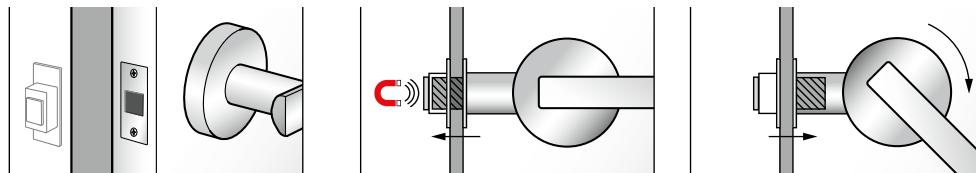

**WHEN OPEN**, the latch is held retracted while the door is open for a clean, minimalist look. Since the strike has no lip, it is not visible.

**WHEN CLOSING**, a rare-earth magnet will instantly and quietly pull the latch into the strike to latch the door securely.

**WHEN USING** the lever, the latch will quietly retract and be held magnetically. Even when the lever is released, the latch will remain retracted in its housing.

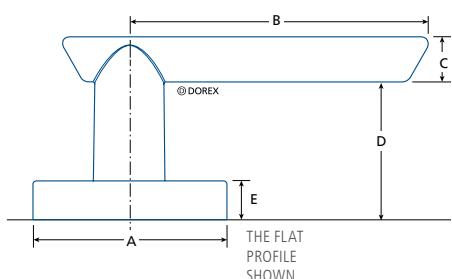

	A	B	C	D	E
<b>CIRCA</b> CT	$\emptyset\ 2\frac{9}{16}$ (64.5)	4 (101.6)	$1\frac{9}{32}$ (15)	$1\frac{3}{4}$ (45)	$\frac{1}{2}$ (12.7)
<b>LINEA</b> LT / LTS	$\emptyset\ 2\frac{9}{16}$ (64.5)	4 (101.6)	$2\frac{5}{32}$ (20)	$1\frac{9}{16}$ (40)	$\frac{1}{2}$ (12.7)
<b>THE FLAT</b> FT / FTS	$\emptyset\ 2\frac{9}{16}$ (64.5)	4 (101.6)	$3\frac{7}{64}$ (14.7)	$1\frac{25}{32}$ (45.3)	$\frac{1}{2}$ (12.7)
<b>STRATA</b> ST / STS	$2\frac{9}{16}$ (64.5)	$4\frac{9}{16}$ (115.9)	$\frac{7}{8}$ (22)	$1\frac{5}{8}$ (42)	$\frac{1}{2}$ (12.7)

IN (MM)

### SELECTION GUIDE

	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE
<b>CIRCA</b> CT		●			●								10
<b>LINEA</b> LT		●			●								10
<b>THE FLAT</b> FT		●			●								10
<b>STRATA</b> ST		●			●								10

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\*) LIFETIME FINISH WARRANTY

M6	100	10	FT	S	15	M	LATCH
BACKSET <sup>1</sup>	SERIES	FUNCTION <sup>2</sup>	STYLE	ROSE <sup>3</sup>	FINISH		

(1) M6:  $2\frac{9}{16}$ IN (60MM) FIXED BACKSET, M7:  $2\frac{3}{4}$ IN (70MM) FIXED BACKSET

(2) 10: PASSAGE, 42: PRIVACY (3) BLANK : ROUND, S: SQUARE



15  
SATIN NICKEL

19  
MATTE BLACK



**DOREX®**

**Signature**





## Levers

- Classic, modern lever styles that can fit into any decor
- Non-handed and handed lever styles
- Privacy function with auto-release
- Keyed entry function available
- Can be keyed to insert into any key system

- Conforms to ANSI/BHMA Grade 3
- 20 Minute fire-rating when installed with optional listed fire can\*
- 25 year mechanical warranty
- 5 year limited finish warranty
- Non-handed or handed, zinc die-cast lever
- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Stainless steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortise faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Entry models include removable 5-pin cylinder with 2 keys
- Full-lip strike with round corners included

(\*) Firecan kit must be ordered in conjunction with lockset, not available separately. For use on fire labelled, solid wood doors only.

- Keying options available
- Other faceplate options available
- 5" (127 mm) backset latch available

### AVAILABLE FUNCTIONS

10 Passage  
 42 Privacy, with auto-release  
 51 Entry   
 -1 Single Dummy (surface)  
 -2 Single Dummy (thru-bolt)  
 -3 Handleset trim\*

(\*) Handleset trim includes lever spring latch



APOLLO  
SATIN NICKEL  
11P 15 26D



ESCORT  
SATIN CHROME  
26D 3



JUNO  
MATTE BLACK  
15 19 26D



ATHENA  
ANTIQUE BRONZE  
11P 15 15A 19 26D



CAMBRIDGE  
SATIN NICKEL  
11P 15 15A 26D



HAWTHORNE  
SATIN CHROME  
26D



MANHATTAN  
ANTIQUE NICKEL  
15A 26D 3 32D



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-05.

## SELECTION GUIDE

101	51	AT	C15	KD	M	RH	—
SERIES <sup>1</sup>	FUNCTION	STYLE	FINISH	KEYING	LATCH <sup>2</sup>	HAND <sup>3</sup>	OPTION <sup>4</sup>

(1) 100: NO KEYWAY; 101: WEISER; 102: SCHLAGE KEYWAY; OMIT FUNCTION AND USE 100 WHEN ORDERING DUMMY OR TRIM (2) M: MORTISE W: DRIVE-IN (3) ATHENA OR DUMMY APOLLO, INDICATE RH: RIGHT HAND, LH: LEFT HAND (4) -1: DUMMY, SINGLE -2: DUMMY, THRU-BOLT -3: TRIM





Firecan kit must be ordered in conjunction with lock, not available separately. For fire labelled wood doors ONLY.

Full keying services available – please contact for details.

	C10B OIL RUB. BRONZE	C11P ANTIQUE BRONZE	C15 SATIN NICKEL	C15A ANTIQUE NICKEL	C19 MATTE BLACK	C26D SATIN CHROME	C3 POLISHED BRASS	C32D SATIN S.STEEL	C4 SATIN BRASS	C5 ANTIQUE BRASS	V3** POLISHED BRASS	/CASE†
ATHENA (REVERSIBLE)*	AT	●	●	●	●	●						20
APOLLO (REVERSIBLE)*	AP	●	●			●						20
CAMBRIDGE	CB	●	●	●		●						20
ESCORT	ES					●	●					20
HAWTHORNE	HW					●						20
JUNO	JN		●		●	●						20
MANHATTAN	M			●		●	●	●				20

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\*) RIGHT HAND, FIELD REVERSIBLE. DUMMY LEVERS ARE NOT REVERSIBLE, PLEASE INDICATE HANDING. (\*\*) LIFETIME FINISH WARRANTY (†) DUMMY ARE 20/CASE

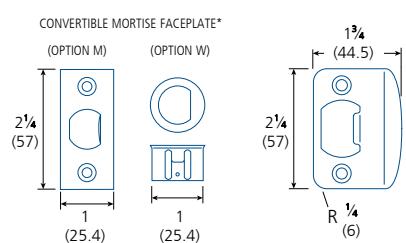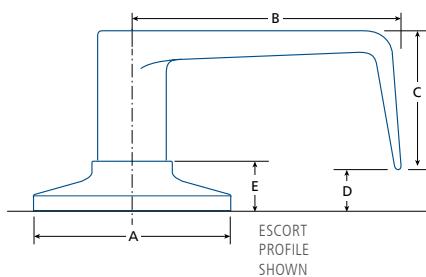

(\*) Regardless of option ordered, the part required to convert from one option to the other is included.

	A	B	C	D	E
ATHENA AT	2 9/16 (65)	3 15/16 (100)	1 (25)	1 1/16 (40)	19/32 (15)
APOLLO AP	2 9/16 (65)	4 1/8 (105)	3/4 (20)	1 3/8 (35)	19/32 (15)
CAMBRIDGE CB	2 9/16 (65)	3 15/16 (100)	5/16 (8)	1 31/32 (50)	19/32 (15)
ESCORT ES	2 9/16 (65)	3 15/16 (100)	1 1/2 (38)	15/32 (12)	19/32 (15)
HAWTHORNE HW	2 9/16 (65)	3 15/16 (100)	3/8 (9.5)	1 31/32 (50)	19/32 (15)
JUNO JN	2 9/16 (65)	4 1/8 (105)	11/16 (18)	1 1/16 (40)	19/32 (15)
MANHATTAN M	2 9/16 (65)	3 15/32 (88)	5/16 (8)	1 31/32 (50)	19/32 (15)

IN (MM)



## Knobs

- Classic, knob styles that can fit into any decor
- Privacy function with auto-release
- Keyed entry function available
- Can be keyed to insert into any key system



BALA  
SATIN NICKEL



EGLINGTON  
ANTIQUE NICKEL



- Conforms to ANSI/BHMA Grade 3
- 20 Minute fire-rating when installed with optional listed firecan kit\*
- 25 year mechanical warranty
- 5 year limited finish warranty
- Steel knob and rose
- For doors  $1\frac{5}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Stainless steel spring latch with adjustable backset
- Mortise faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Entry models include removable 5-pin cylinder with 2 keys
- Full-lip strike with round corners included

(\*) Firecan kit must be ordered in conjunction with lockset, not available separately. For use on fire labelled, solid wood doors only.

- Keying options available
- Other faceplate options available
- 5" (127 mm) backset latch available

### AVAILABLE FUNCTIONS

10 Passage  
 42 Privacy, with auto-release  
 51 Entry   
 -1 Single Dummy (surface)  
 -2 Single Dummy (thru-bolt)  
 -3 Handleset trim



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-08.

## SELECTION GUIDE

101	51	B	C15	KD	M	-
SERIES <sup>1</sup>	FUNCTION	STYLE	FINISH	KEYING	LATCH <sup>2</sup>	OPTION <sup>3</sup>

(1) 100: NO KEWWAY 101: WEISER 102: SCHLAGE KEYWAY; OMIT FUNCTION AND USE 100 WHEN ORDERING DUMMY OR TRIM (2) M: MORTISE W: DRIVE-IN (3) -1: DUMMY, SINGLE -2: DUMMY, THRU-BOLT -3: TRIM




Firecan kit must be ordered in conjunction with lock, not available separately. For fire labelled wood doors ONLY.

Full keying services available – please contact for details


		C10B OIL RUB. BRONZE	C11P ANTIQUE BRONZE	C15 SATIN NICKEL	C15A ANTIQUE NICKEL	C19 MATTE BLACK	C26 POLISHED CHROME	C26D SATIN CHROME	C3 POLISHED BRASS	C32D SATIN S.STEEL	C4 SATIN BRASS	C5 ANTIQUE BRASS	53 ANT. / POL. BRASS	/CASE
<b>BALA</b>	<b>B</b>		●	●	●				●	●		●	●	20
<b>EGLINGTON</b>	<b>EG</b>		●	●	●		●							20

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT



	A	B	C	D
<b>BALA</b>	$2\frac{9}{16}$ (65)	2 (51)	$1\frac{9}{16}$ (40)	$2\frac{1}{2}$ (63.5)
<b>EGLINGTON</b>	$2\frac{9}{16}$ (65)	$1\frac{3}{8}$ (60)	$1\frac{9}{16}$ (40)	$2\frac{1}{2}$ (63.5)

IN (MM)

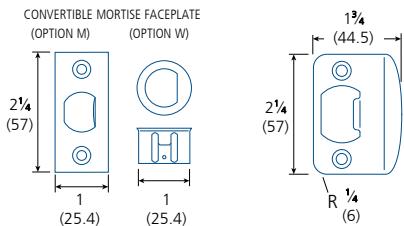

(\*) Regardless of option ordered, the part required to convert from one option to the other is included.



## Entry Handlesets

- Reliable, quality classic entry handlesets for residential homes
- Non-handed
- Includes Bala interior knob
- Interior knob can be swapped with any other Signature lever or knob<sup>1</sup>
- Can be keyed to insert into any key system
- Can accommodate CX5 High Security cylinders for enhanced security

(1) Availability may vary, please contact your local Dorex representative.

- Conforms to ANSI/BHMA Grade 3
- 20 Minute fire-rating when installed with optional listed firecan kits\*
- 25 year mechanical warranty
- 5 year limited finish warranty
- Non-handed, zinc die-cast exterior trim
- For doors  $1\frac{3}{8}$ – $2\frac{1}{4}$ " (44.5–57 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Stainless steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Brass 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- 4-way mortise faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Removable 5-pin brass cylinder in steel housing with 2 keys
- Full-lip strike and security strike for wood door frames (round corners) included

(\*) Firecan kits must be ordered in conjunction with handleset, not available separately. For use on fire labelled, solid wood doors only.

### AVAILABLE FUNCTIONS

- Entry
- Dummy – available



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-04.

## SELECTION GUIDE

401	BI	B	C15	KD	W	-
SERIES <sup>1</sup>	STYLE	TRIM	FINISH	KEYING	LATCH	OPTION <sup>2</sup>
(1) 400: NO KEYWAY	401: WEISER	402: SCHLAGE KEYWAY	USE 400 WHEN ORDERING DUMMY			
(2) DUM: DUMMY						




Fire-cans (2) must be ordered in conjunction with lock, not available separately. For fire labelled wood doors ONLY.

GATE LATCH AVAILABLE, must be ordered in conjunction with handleset – please contact for details.

Full keying services available – please contact for details


	C10B OIL RUB. BRONZE	C11P ANTIQUE BRONZE	C15 SATIN NICKEL	C15A ANTIQUE NICKEL	C19 MATTE BLACK	C26 POLISHED CHROME	C26D SATIN CHROME	C3 POLISHED BRASS	C32D SATIN S.STEEL	C4 SATIN BRASS	C5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE
BIARRITZ	BI			●						●	●		6
CAPRI	CA	●	●	●	●								6
IMPERIAL	IM	●	●	●									6
MAYFAIR	MA	●	●	●	●	●	●	●	●	●	●	●	6

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\*) LIFETIME FINISH WARRANTY

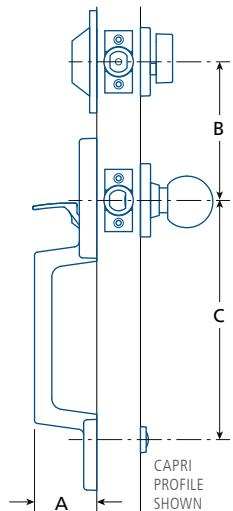

	A	B*	C
BIARRITZ BI	2 $\frac{3}{8}$ (60)	5 (127)	8 $\frac{13}{32}$ (214)
CAPRI CA	2 $\frac{5}{32}$ (55)	5 (127)	8 $\frac{13}{32}$ (214)
IMPERIAL IM	2 $\frac{9}{16}$ (65)	5 (127)	8 $\frac{13}{32}$ (214)
MAYFAIR MA	2 $\frac{7}{16}$ (62)	5 (127)	8 $\frac{13}{32}$ (214)

IN (MM) (\*) RECOMMENDED DISTANCE

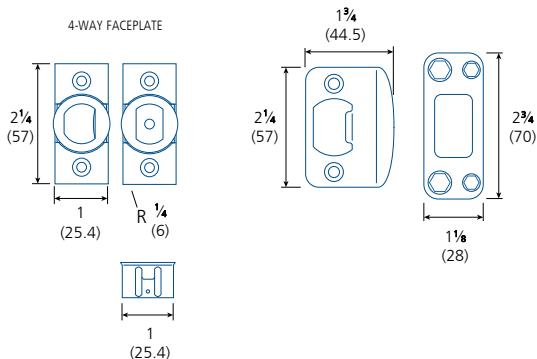

## Deadbolt Locks

- ANSI/BHMA Grade 3 Security, excellent for suite entry doors and offices
- Can be keyed to insert into any key system
- Can accommodate CX5 High Security cylinders for enhanced security



- Conforms to ANSI/BHMA Grade 3

- 20 Minute fire-rating available
- 25 year mechanical warranty
- 5 year limited finish warranty

- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Extension kit for  $2\frac{1}{4}$ " (57 mm) thick doors available (#[TLA85052](#))
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel or brass 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortise faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Removable brass cylinder in steel housing with 2 keys
- Rotating exterior collar for enhanced protection against physical attack
- Security strikes for wood and steel frames included
- Other faceplate options available

### AVAILABLE FUNCTIONS

51 Single cylinder with thumb-turn

55 One-side, thumb-turn only

57 Thumb-turn with exterior plate


60 Double cylinder




200 SERIES  
SATIN NICKEL  
SINGLE CYLINDER



200 SERIES  
SATIN NICKEL  
THUMB-TURN ONLY



200 SERIES  
SATIN STAINLESS STEEL  
DOUBLE CYLINDER



## SELECTION GUIDE

F	201	51	C15	KD	M
RATING <sup>1</sup>	SERIES <sup>2</sup>	FUNCTION	FINISH	KEYING <sup>3</sup>	LATCH <sup>4</sup>
(1) LEAVE BLANK FOR NON-RATED MODEL (2) 200: NO KEYWAY 201: WEISER 5-PIN 202: SCHLAGE KEYWAY 6-PIN USE 200 WHEN ORDERING FUNCTIONS 55 OR 57 (2) KA: KEYED ALIKE KD: KEYED DIFFERENT (3) M: CONVERTIBLE MORTISE					




For fire labelled wood doors ONLY. For details, consult local building codes and/or local authority having jurisdiction (AHJ). Separate firecan kit may be required for some finishes.

Full keying services available – please contact for details

C10B OIL RUB. BRONZE	C11P ANTIQUE BRONZE	C15 SATIN NICKEL	C15A ANTIQUE NICKEL	C19 MATTE BLACK	C26 POLISHED CHROME	C26D SATIN CHROME	C32D SATIN S.STEEL	C3 POLISHED BRASS	C4 SATIN BRASS	C5 ANTIQUE BRASS	C53 ANT. / POL. BRASS	V3* POLISHED BRASS	/CASE
200 SERIES	●	●	●	●	●	●	●	●	●	●	●	●	24


OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT. (\*) LIFETIME FINISH WARRANTY

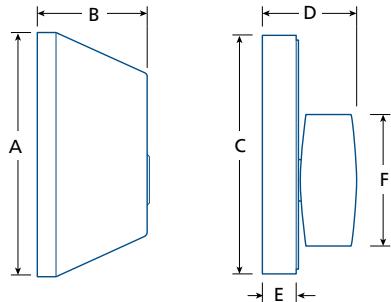


200 SERIES	A	B	C	D	E	F
	Ø 2 9/16 (65)	1 1/8 (29)	Ø 2 1/2 (63)	1 (25.4)	3/8 (9)	1 1/8 (35)

IN (MM)

CONVERTIBLE MORTISE FACEPLATE  
(OPTION M)



SECURITY STRIKES  
(WOOD / METAL)



# DOREX®

# METRO



# METRO

# DOREX



01.240 DOREX METRO

ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT [WWW.CANAROPA.COM](http://WWW.CANAROPA.COM) OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-04.



## Levers

- All new collection of urban inspired, contemporary levers
- Non-handed and handed lever styles
- Privacy function with auto-release

- 1 year mechanical warranty
- 1 year limited finish warranty
- Non-handed or handed, zinc die-cast lever
- For doors  $1\frac{5}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- 4-Way, mortise faceplate with square corners, convertible to drive-in
- Full-lip strike with round corners included
- Other faceplate options available

### AVAILABLE FUNCTIONS

10 Passage  
 51 Entry (Livia only)  
 42 Privacy, with auto-release  
 17 Single Dummy (surface)



## SELECTION GUIDE


V2X	42	Q	S	L	-	15	M
SERIES	FUNCTION	STYLE	ROSE <sup>1</sup>	HAND <sup>2</sup>	FINISH	LATCH <sup>3</sup>	

(1) BLANK: ROUND **S**: SQUARE (2) FOR CASSIUS INDICATE **R**: RIGHT HAND, **L**: LEFT HAND  
(3) BLANK: 4-WAY; **D**: DRIVE-IN; **M**: FIXED MORTISE (SQ CORNER); **MR**: FIXED MORTISE (RND CORNER)

	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	5 ANTIQUE BRASS	/CASE†
<b>LIVIA</b>	L		●	●	●		●					24
<b>NERO</b>	N		●		●		●					24
<b>CASSIUS (HANDED)</b>	Q		●		●		●					24


OTHER FINISHES/OPTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT

(†) DUMMY ARE 30/CASE

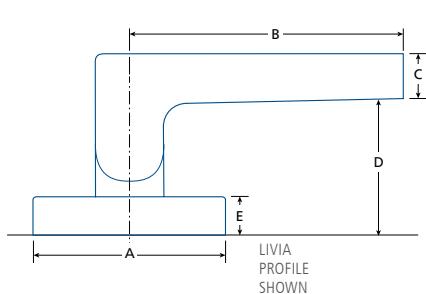

	A	B	C	D	E
<b>LIVIA</b> L / LS	$\varnothing 2\frac{9}{16}$ (65)	$3\frac{7}{8}$ (99.8)	$\frac{3}{4}$ (19.5)	$1\frac{5}{8}$ (41)	$1\frac{17}{32}$ (13.5)
<b>NERO</b> N / NS	$\varnothing 2\frac{9}{16}$ (65)	$4\frac{1}{16}$ (103)	$\frac{3}{8}$ (9.5)	2 (50.5)	$1\frac{17}{32}$ (13.5)
<b>CASSIUS</b> Q	$\varnothing 2\frac{9}{16}$ (65)	$4\frac{5}{8}$ (117)	$2\frac{9}{32}$ (23)	$1\frac{11}{16}$ (43.4)	$1\frac{17}{32}$ (13.5)

IN (MM)

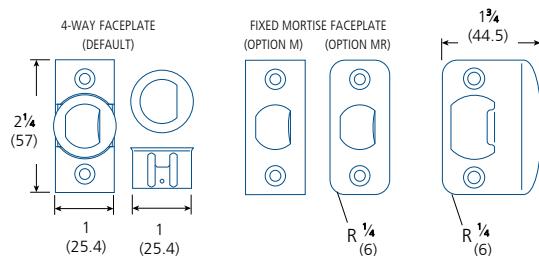

## Knobs

- Mid-century inspired, contemporary door knobs that can accommodate nearly any modern decor
- Privacy function with auto-release
- Keyed entry function available
- Round or square rose

- 1 year mechanical warranty
- 1 year limited finish warranty
- Non-handed, zinc die-cast knob
- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- 4-Way, mortise faceplate with square corners, convertible to drive-in
- Entry model includes 5-pin cylinder, Weiser keyway with 2 keys
- Full-lip strike with round corners included
- Other faceplate options available



### AVAILABLE FUNCTIONS

10 Passage  
 42 Privacy, with auto-release  
 51 Entry  
 17 Single Dummy (surface)



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
 VISIT [WWW.CANAROPA.COM](http://WWW.CANAROPA.COM) OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-04.


## SELECTION GUIDE

V3X	42	G	S	-	15	MR
SERIES	FUNCTION	STYLE	ROSE <sup>1</sup>	FINISH	LATCH <sup>2</sup>	

(1) LEAVE BLANK FOR ROUND ROSE (2) 4-WAY LATCH BY DEFAULT; MR: FIXED MORTISE (RND)


	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26D SATIN CHROME	3 POLISHED BRASS	4 SATIN BRASS	5 ANTIQUE BRASS	53 ANT. / POL. BRASS	/CASE†
<b>GEMINI</b>	G/GS										24*

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT  
(†) DUMMY ARE 30/CASE (\* ) GEMINI ENTRY FUNCTION IS 12/CASE



	A	B	C	D
<b>GEMINI</b> G/GS	Ø 2 $\frac{9}{16}$ (65)	2 $\frac{1}{4}$ (57)	2 $\frac{9}{16}$ (65)	7/8 (22)

IN (MM)

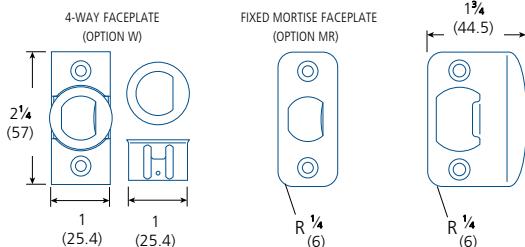

## Deadbolt Locks

- Contemporary deadbolt lock styles for home and property security

- 20 Minute fire-rating model available
- 1 year mechanical warranty
- 1 year limited finish warranty

- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Extension kit for  $2\frac{1}{4}$ " (57 mm) thick doors available (#B1-EXT)
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortise faceplate with square corners, convertible to drive-in
- 5-pin cylinder, Weiser keyway with 2 keys
- Strike for wood door frames included

- Other faceplate options available
- 5-pin Schlage cylinder available



METRO SQUARE  
MATTE BLACK  
SINGLE CYLINDER

15 19 26D

### AVAILABLE FUNCTIONS

51 Single cylinder with thumb-turn ↗



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-05.

DOREX METRO 01.248

## SELECTION GUIDE

V11	51	-	S	-	15	KD	M
SERIES <sup>1</sup>	FUNCTION	STYLE <sup>2</sup>		FINISH	KEYING <sup>3</sup>		LATCH <sup>4</sup>


(1) V11: WEISER 5-PIN; V12: SCHLAGE 5-PIN. (2) S: SQUARE (3) KA: KEYED ALIKE KD: KEYED DIFFERENT (4) M: CONVERTIBLE MORTISE FM: FIRE-RATED, FIXED MORTISE (SQ CORNER)



For fire labelled wood doors ONLY. To order, specify V12 Schlage series lock with FM latch.

STYLE	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	5 ANTIQUE BRASS	53 ANT. / POL. BRASS	/CASE
<b>METRO SQUARE</b>			●		●		●						24

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT

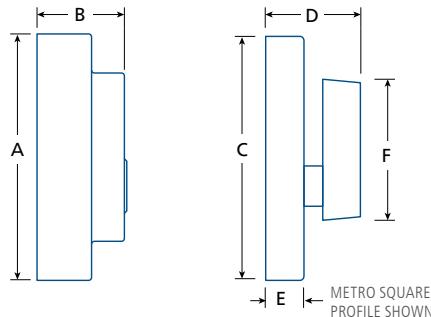


METRO SQUARE	A	B	C	D	E	F
	2 9/16 (65)	3/4 (20)	2 1/2 (63)	1 1/64 (29)	3/8 (9)	1 1/4 (44.5)


IN (MM)

IN (MM)


CONVERTIBLE FACEPLATE  
(OPTION M)



FIXED FACEPLATE  
(OPTION FM)




STRIKE



# DOREX®

# BUILDER

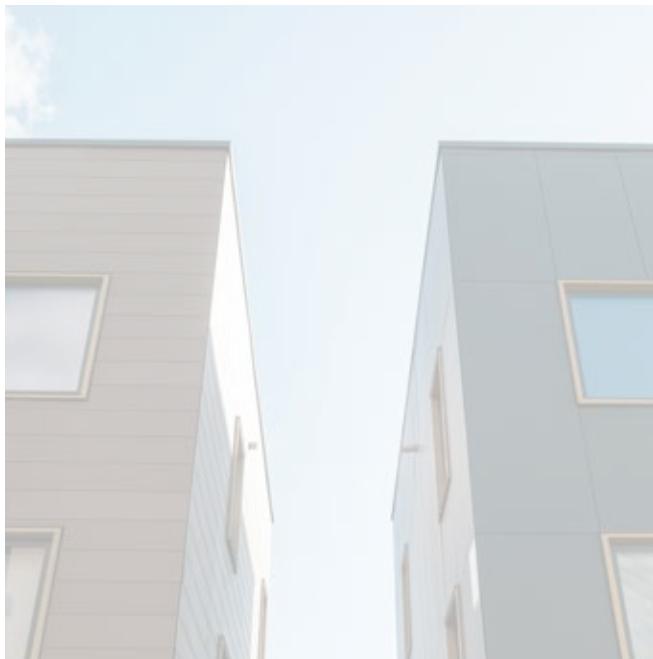

**01.250 DOREX BUILDER**

ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT [WWW.CANAROPA.COM](http://WWW.CANAROPA.COM) OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-02.



## Levers

- Contemporary lever styles for residential home construction professionals
- Keyed entry function available



EARL  
SATIN NICKEL  
15 26D

- 1 Year mechanical warranty
- 1 Year limited finish warranty
- Non-handed zinc die-cast lever
- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- 4-Way, mortise faceplate with square corners, convertible to drive-in
- Entry model includes 5-pin cylinder, Weiser keyway with 2 keys
- Full-lip strike with round corners included
- Other faceplate options available



STRAIGHT  
MATTE BLACK  
11P 15 15A 19



JULIA  
SATIN NICKEL  
15 19

### AVAILABLE FUNCTIONS

10 Passage  
17 Dummy, single (surface)  
42 Privacy  
51 Entry •



## SELECTION GUIDE

B2X	42	J	S	-	15	KD	M
SERIES	FUNCTION	STYLE	ROSE <sup>2</sup>		FINISH	KEYING <sup>3</sup>	LATCH <sup>4</sup>


(2) BLANK: ROUND; S: SQUARE (3) KD: KEYED DIFFERENT (DEFAULT); KA: KEYED ALIKE  
(4) BLANK: 4-WAY; M: FIXED MORTISE (SQ CORNER); MR: FIXED MORTISE (RND CORNER)

NOTE: ONLY THE STRAIGHT STYLE (S) IS AVAILABLE WITH KEYED ENTRY FUNCTION (51).

	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	5 ANTIQUE BRASS	/CASE†
EARL	E		●				●					20
JULIA	J		●		●							20
STRAIGHT	S	●	●	●	●		●	●				20


OTHER FINISHES/OPTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT

(†) DUMMY ARE 30/CASE

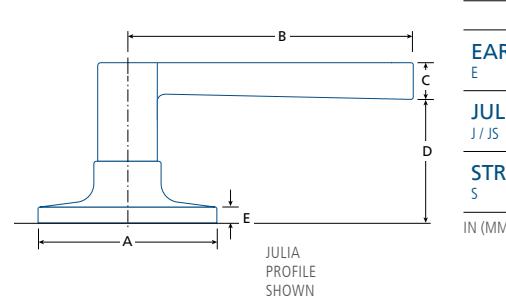

	A	B	C	D	E
EARL E	Ø 2 9/16 (65)	3 1/2 (89)	3/8 (9.5)	1 3/8 (35)	17/32 (13.5)
JULIA J / JS	Ø 2 9/16 Ø (65)	4 7/16 (112.5)	3/4 (19)	1 1/2 (38)	1/4 (6.5)
STRAIGHT S	Ø 2 9/16 (65)	3 3/4 (95.3)	3/16 (4.8)	2 (50.7)	1/4 (6.5)

IN (MM)

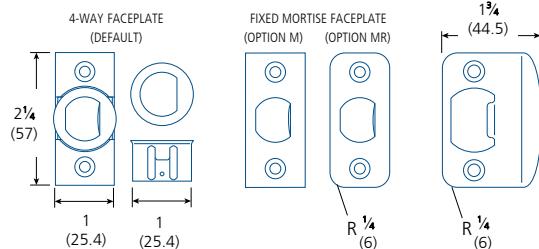

## Knobs

- Versatile classic door knobs for residential home construction professionals
- Keyed entry function available



RONDO  
SATIN CHROME

11P 15 15A 19 26D 3

- 1 Year mechanical warranty
- 1 Year limited finish warranty
- Non handed, steel knob
- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1 (25.4 mm) edge bore
- Steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- 4-Way, mortise faceplate with square corners, convertible to drive-in
- Entry model includes 5-pin cylinder, Weiser keyway with 2 keys
- Full-lip strike with round corners included
- Other faceplate options available



RONDO  
SATIN CHROME

### AVAILABLE FUNCTIONS

10 Passage  
42 Privacy  
51 Entry   
17 Single Dummy (surface)



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT [WWW.CANAROPA.COM](http://WWW.CANAROPA.COM) OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-04.


## SELECTION GUIDE

B3X	51	R	-	15	KD	W
SERIES	FUNCTION	STYLE		FINISH	KEYING <sup>1</sup>	LATCH <sup>2</sup>

(1) KD: KEYED DIFFERENT; KA: KEYED ALIKE


(2) W: 4-WAY; M: FIXED MORTISE; MR: FIXED MORTISE (RND CORNER)

	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26D SATIN CHROME	3 POLISHED BRASS	4 SATIN BRASS	5 ANTIQUE BRASS	53 ANT. / POL. BRASS	/CASE†
<b>RONDO</b>	R	●	●	●	●	●	●	●	●	●	30

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT  
(†) DUMMY ARE 60/CASE

	Ø A	B	C
<b>RONDO</b> R	2 $\frac{9}{16}$ (65)	2 (51)	2 $\frac{3}{4}$ (70)

IN (MM)

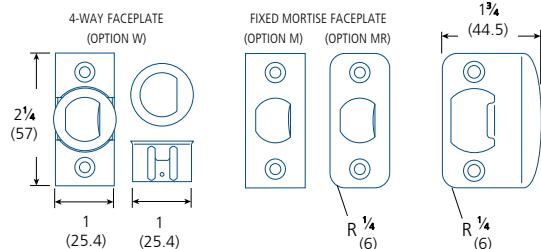


## Entry Handlesets

- Classic entry handlesets for residential home construction professionals
- Non-handed
- Includes interior knob

- 1 Year mechanical warranty
- 1 Year limited finish warranty
- Non-handed, zinc die-cast exterior trim
- For doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Stainless steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortised faceplate with square corners, convertible to drive-in
- 5-pin cylinder, Weiser keyway with 2 keys
- Full-lip strike and security strike for wood door frames (round corners) included

### AVAILABLE FUNCTIONS

- Entry

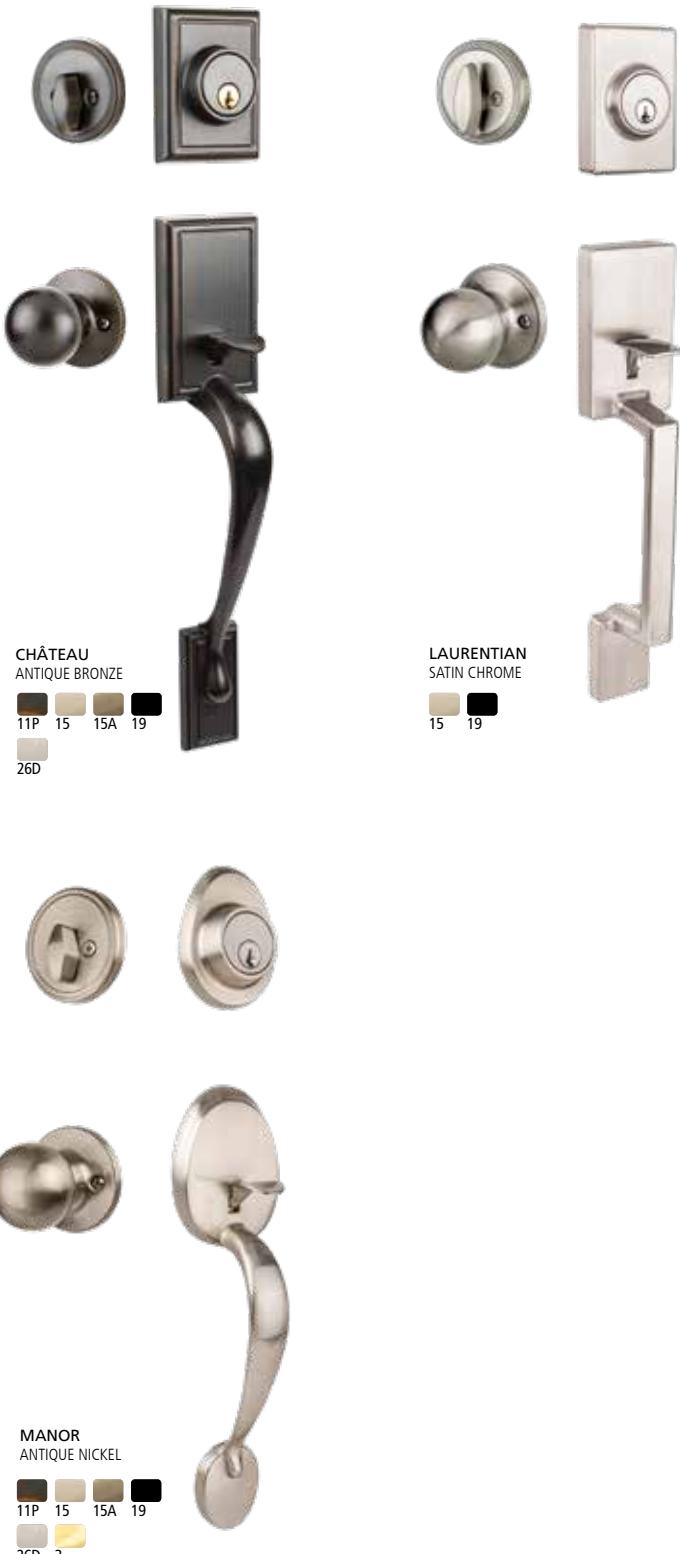

ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT [WWW.CANAROPA.COM](http://WWW.CANAROPA.COM) OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2025-02.


## SELECTION GUIDE

30	1	CH	B	15	KD	W
SERIES	KEYWAY <sup>1</sup>	STYLE	TRIM	FINISH	KEYING <sup>2</sup>	LATCH <sup>3</sup>

(1) 1: WEISER (2) KD: KEYED DIFFERENT (3) W: MORTISE


	C10B OIL RUB. BRONZE	C11P ANTIQUE BRONZE	C15 SATIN NICKEL	C15A ANTIQUE NICKEL	C19 MATTE BLACK	C26 POLISHED CHROME	C26D SATIN CHROME	C3 POLISHED BRASS	C32D SATIN S.STEEL	C4 SATIN BRASS	C5 ANTIQUE BRASS	V3*	/CASE
CHÂTEAU CH	●	●	●	●			●						6
LAURENTIAN LA		●		●									6
MANOR MN	●	●	●	●	●		●	●					6

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\* )LIFETIME FINISH WARRANTY

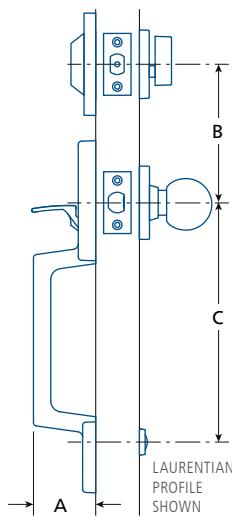

	A	B <sup>1</sup>	C <sup>2</sup>
CHÂTEAU CH	2 $\frac{9}{16}$ (65)	5 (127)	8 $\frac{7}{16}$ (214)
LAURENTIAN LA	2 $\frac{3}{8}$ (60)	5 (127)	8 $\frac{7}{16}$ (214)
MANOR MN	2 $\frac{3}{8}$ (60)	5 (127)	8 $\frac{5}{8}$ (219)

IN (MM) (1) RECOMMENDED DISTANCE (2) DEFAULT DISTANCE, CAN BE ADJUSTED TO 8 5/8" (219 MM) OR 9" (228 MM)

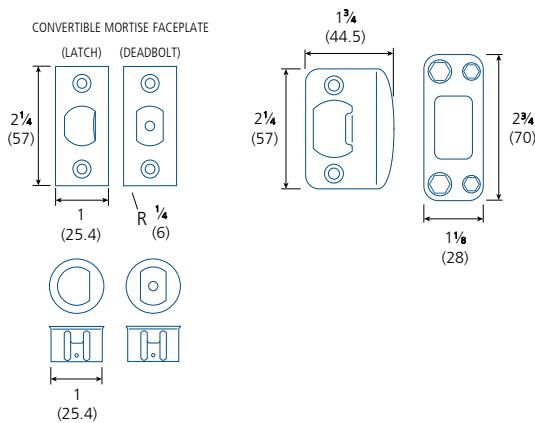

## Deadbolt Locks

- Classic deadbolt for home construction professionals

- 1 Year mechanical warranty
- 1 Year limited finish warranty
- For doors  $1\frac{3}{4}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- 4-Way mortise faceplate with square corners, convertible to drive-in
- 5-pin cylinder, Weiser keyway with 2 keys
- Security strike for wood door frames included



CITADELLE (C)  
SATIN CHROME  
SINGLE CYLINDER

11P 15 19 3 32D 5

### AVAILABLE FUNCTIONS

51 Single cylinder with thumb-turn ↗



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-04.

## SELECTION GUIDE

## CITADELLE // STANDARD


B1	1	51	C	-	15	KD	M
SERIES	KEYWAY <sup>1</sup>	FUNCTION	TYPE	FINISH	KEYING <sup>2</sup>	LATCH <sup>3</sup>	

(1) 1: WEISER 2: SCHLAGE (2) KD: KEYED DIFFERENT (DEFAULT); KA: KEYED ALIKE

(3) W: 4-WAY; M: FIXED MORTISE; MR: FIXED MORTISE (RND CORNER)


STYLE	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	5 ANTIQUE BRASS	53 ANT. / POL. BRASS	/CASE
CITADELLE ROUND	●	●		●				●	●		●	●	24

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT

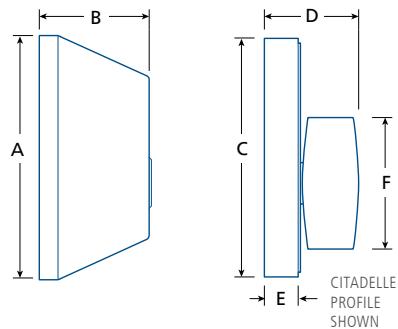

	A	B	C	D	E	F
CITADELLE C	Ø 2 $\frac{9}{16}$ (65)	1 $\frac{1}{4}$ (32)	Ø 2 $\frac{1}{2}$ (63)	1 (25.5)	$\frac{3}{8}$ (9.5)	1 $\frac{13}{32}$ (36)

IN (MM)

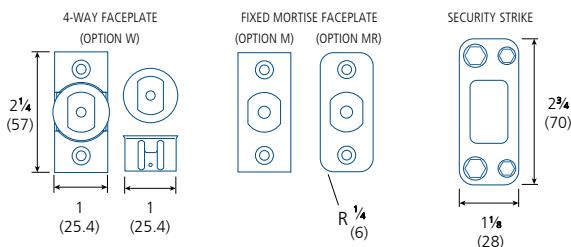

# POCKET DOOR

## RESIDENTIAL AUXILIARY LOCKS

### POCKET DOOR LOCK

2510, 2542



2510C15  
PASSAGE



2542C26D  
PRIVACY

- Fits doors  $1\frac{3}{8}$ " (35 mm) thick
- Solid brass construction
- Handed, reversible
- Privacy model includes strike
- Mounting hardware included: wood screws

#### DIMENSIONS

$2\frac{1}{4}D \times 3\frac{1}{4}H \times 1\frac{3}{8}W$  (57 x 83 x 35 mm)

#### MODELS

2510: Passage  
2542: Privacy

2510	C15
MODEL	FINISH

C15	C15A	C19	C26	C26D	C3	C5
SATIN NICKEL	ANTIQUE NICKEL	MATTE BLACK	POLISHED CHROME	SATIN CHROME	POLISHED BRASS	ANTIQUE BRASS

OTHER FINISHES AVAILABLE—PLEASE CONTACT

### POCKET DOOR LOCK

2610, 2642



2610-11P  
PASSAGE



2642-26D  
PRIVACY



2610S-19  
PASSAGE



2642S-15  
PRIVACY

- Fits doors  $1\frac{3}{8}$ – $1\frac{3}{4}$ " (35–44.5 mm) thick with standard 160 or 161 door preparation
- Non-handed
- $2\frac{3}{8}$ " (60 mm) backset
- $2\frac{3}{4}$ " (70 mm) backset latch sold separately:  
#2610L234: Passage  
#2642L234: Privacy
- Spring-loaded pop-out edge pull
- Privacy model includes latch with integrated spring-loaded pop-out edge pull, dust box, and strike
- Mounting hardware included: wood screws

#### DIMENSIONS

Round rose:  $\varnothing 2\frac{7}{16}$ " (62 mm)  
Square rose (S):  $\varnothing 2\frac{7}{16}$ " (62 mm)  
Faceplate:  $1 \times 2\frac{1}{4}$ " (25.4 x 57 mm);  
 $\frac{1}{4}$ " (6.4 mm) radius corners\*  
(\*) Square corner faceplate available by special order.

#### MODELS

2610: Round, Passage  
2642: Round, Privacy  
2610S: Square, Passage  
2642S: Square, Privacy

2642	–	26D
MODEL		FINISH

#### 2610 / 2642

11P	15	15A	19	26	26D	3
ANTIQUE BRONZE	SATIN NICKEL	ANTIQUE NICKEL	MATTE BLACK	POLISHED CHROME	SATIN CHROME	POLISHED BRASS

OTHER FINISHES AVAILABLE—PLEASE CONTACT

#### 2610S / 2642S

15	19	26D
SATIN NICKEL	MATTE BLACK	SATIN CHROME

OTHER FINISHES AVAILABLE—PLEASE CONTACT







**Certifications**

- Conforms to ANSI/BHMA A156.5, Grade 2
- cULus listed, 2hr fire-rating
- 3 Year limited mechanical warranty
- 1 Year limited electronic warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)

**Handing** • Non handed

**Backset** • 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm) adjustable

**Deadbolt** • Steel with hardened steel security pin  
• 1" (25.4 mm) throw

**Faceplate** • Mortise type, square corners  
• 1x2 $\frac{1}{4}$ " (25.4x57 mm)

**Strike** • Security strike (wood frame), square corners  
• 1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (28.5x70 mm)

**Chassis** • Steel cylinder housing  
• Exposed mounting screws  
• Exterior rubber gasket

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " or 1 $\frac{1}{2}$ " (54 or 38 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 5-pin (drilled 6)  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable

*Other keyways and keying options available, including CX5 high security.*

**Interface** • Digital touch keypad  
• Blue LED back-light

**Electronic Features**

- 1 Programming code (8 digit)
- 25 User codes (4–8 digits)
- 4 Renewable single use codes
- Auto Lock with delay (99 sec. maximum)
- Vacation Mode (disables keypad)
- Optional random screen keypad activation code to prevent number probing
- Low battery power indicator

**Wireless Protocol** • RFID - MIFARE™ 13.56 MHz (Classic 1K)

• 25 RFID token capacity  
• 2 RFID cards included\*  
• Two-factor authentication mode available (requires user code and RFID token)

(\* *Other single or dual frequency key fobs and bracelets available by special order.*

**Power** • DC 6V

*Four (4) AA 1.5V alkaline batteries NOT included*

**Operation Temperature** • -31° to 150.8°F (-35° to 66°C)

*Temperature tolerance can vary due to weather conditions*

**Function** 51 Single cylinder, thumb-turn

**Finish** 15–Satin nickel, 19–Matte black

*Other finishes available by special order*

ASM	F400T	NR	2	51	KD	M	–	15
TYPE	SERIES	PROTOCOL	KEYWAY	FUNCTION	KEYING	LATCH	FINISH	




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT [WWW.CANAROPA.COM](http://WWW.CANAROPA.COM) OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-03.

## SELECTION GUIDE

SERIES	DESCRIPTION	FINISH <sup>1</sup>	/CASE
<b>ASM-F400T-NR</b>	RFID Electronic deadbolt with LED digital touch keypad. 	15, 19	6

(1) OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

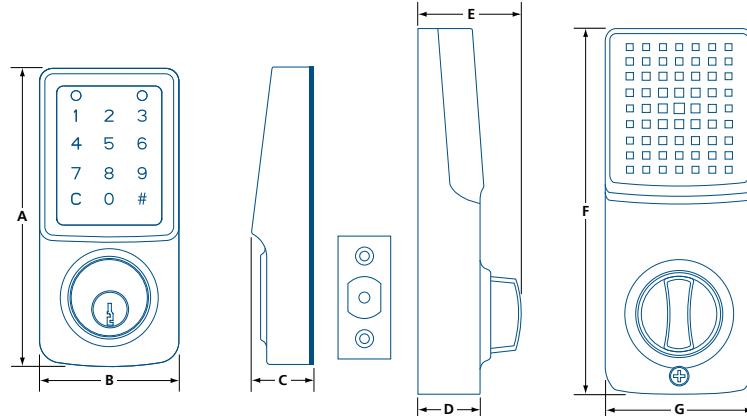

	A	B	C	D	E	F	G
<b>F400T</b>	5 <sup>7</sup> / <sub>16</sub> (138)	2 <sup>1</sup> / <sub>2</sub> (65)	1 <sup>1</sup> / <sub>8</sub> (29)	1 <sup>1</sup> / <sub>8</sub> (30)	2 (51.5)	6 <sup>13</sup> / <sub>16</sub> (173)	2 <sup>3</sup> / <sub>4</sub> (70)

IN (MM)

## PARTS & ACCESSORIES



### A-F400-PBC

Replacement battery cover for F400T.



### A-F4-PDW

11 in (28 cm) data wire.



### A-PDMF-BU

Single frequency RFID (13.56 MHz),  
Classic 1K key fob.



### A-F400-PIG

Optional rubber gasket for interior trim  
for F400T. *Not included.*





**Certifications** • Conforms to ANSI/BHMA A156.2, Grade 2  
• 3 Year limited mechanical warranty  
• 1 Year limited electronic warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)

**Handing** • Non handed

**Backset** • 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm) adjustable

**Spring Latch** • Zinc alloy

•  $\frac{1}{2}$ " (12.7 mm) throw

**Faceplate** • Mortise type, square corners  
• 1 $\times$ 2 $\frac{1}{4}$ " (25.4x57 mm)

**Strike** • T-Type, square corners

• 1 $\frac{1}{8}$ –2 $\frac{3}{4}$ " (28.5x70 mm) wood frame

**Chassis** • Zinc die-cast levers

• Lever clutch release

• Exposed mounting screws

• Interior / exterior trim gaskets

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 5-pin

• Schlage "C" keyway, 2 keys

• Removable, rekeyable

*Other keyways and keying options available. May require special order.*

**Interface** • Digital touch keypad  
• Blue LED back-light

**Electronic Features** • 1 Programming code (8 digit)  
• 25 User codes (4–8 digits)  
• 4 Renewable single use codes  
• Auto Lock with delay (99 sec. maximum)  
• Vacation Mode (disables keypad)  
• Optional random screen keypad activation code to prevent number probing  
• Low battery power indicator

**Wireless Protocol** • RFID - MIFARE™ 13.56 MHz (Classic 1K)

• 25 RFID token capacity

• 2 RFID cards included\*

• Two-factor authentication mode available (requires user code and RFID token)

*(\* Other single or dual frequency key fobs and bracelets available by special order.*

**Power** • DC 6V

*Four (4) AA 1.5V alkaline batteries NOT included.*

**Operation Temperature** • -31° to 150.8°F (-35° to 66°C)

*Temperature tolerance can vary due to weather conditions.*

**Function** 80 Storeroom

**Lever Style** JN–Juno (default), C–Curved return\*, H–Standard return\*

*(\* May require additional lead time.*

**Finish** 15–Satin nickel, 19–Matte black

*Other finishes available by special order.*

ASM	F425T	NR	2	80	KD	M	–	JN	–	15
TYPE	SERIES	PROTOCOL	KEYWAY	FUNCTION	KEYING	LATCH	LEVER	FINISH		



## SELECTION GUIDE

SERIES	DESCRIPTION	STYLE <sup>1</sup>	FINISH <sup>2</sup>	/ CASE
<b>ASM-F425T-NR</b>	RFID Electronic lever lockset with LED digital touch keypad.  JN, C, H		15, 19	4

(1) OPTIONAL C, H STYLE LEVERS MAY REQUIRE ADDITIONAL LEAD TIME (2) OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.


### OPTIONAL LEVERS



(C) Curved return




(H) Standard return

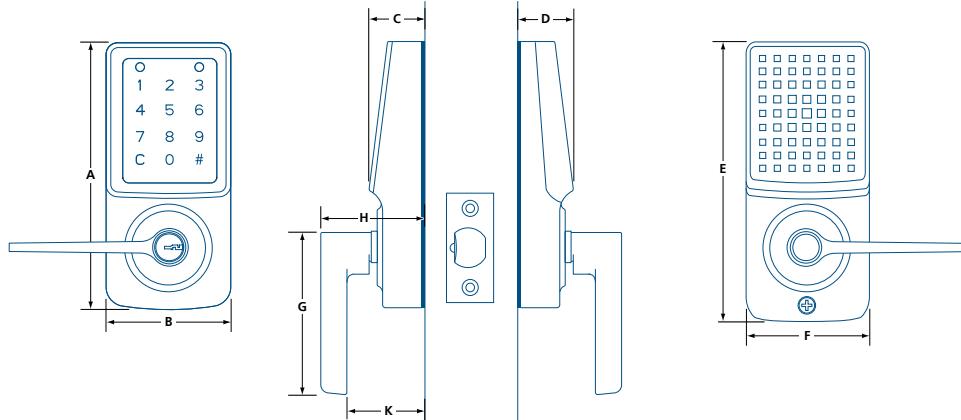

	A	B	C	D	E	F	G	H	K
<b>F425T JN (JUNO)</b>	6 1/8 (155)	3	11 1/32 (34)	1 1/4 (32)	6 1/8 (155)	2 29/32 (74)	4 25/32 (121.2)	2 27/32 (72.5)	2 (50.8)

IN (MM)



	G	H	K
<b>F425T C</b>	4 1/16 (118.9)	2 27/32 (72.5)	1 3/32 (27.7)
<b>F425T H</b>	4 3/16 (106.2)	2 27/32 (72.5)	1 (25.6)

IN (MM)

## PARTS & ACCESSORIES



**A-F425-PBC**

Replacement battery cover for F425T.



**A-F425-PST**

Replacement screen trim for F425T.



**A-PDMF-BU**

Single frequency RFID (13.56 MHz),  
Classic 1K key fob.





**Certifications**

- Conforms to ANSI/BHMA A156.5, Grade 2
- cULus listed, 20min fire-rating
- UL 1043, Safety for Burglary-Resistant Electric Locking Mechanisms
- 3 Year limited mechanical warranty
- 1 Year limited electronic warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)

**Handing** • Non handed

**Backset** • 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm) adjustable

**Deadbolt** • Steel with hardened steel security pin  
• 1" (25.4 mm) throw

**Faceplate** • Mortise type, square corners  
• 1 x 2 $\frac{1}{4}$ " (25.4 x 57 mm)

**Strike** • Security strike (wood frame), square corners  
• 1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (28.5 x 70 mm)

**Chassis** • Steel cylinder housing  
• Exposed mounting screws  
• Integrated all-weather seal

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " or 1 $\frac{1}{2}$ " (54 or 38mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** • Solid brass, 5-pin (drilled 6)  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable

*Other keyways and keying options available, including CX5 high security.*

**Interface**

- Digital touch keypad
- White LED back-light

**Electronic Features**

- iKey Connect mobile app control (iOS / Android)
- 200 User credentials per lock

**Protocol**

- PIN codes can be single use, scheduled, or permanent

- Optional keyless entry (geofencing)
- Optional auto-lock with delay (900 sec. max.)
- Optional random keypad activation code to prevent number probing
- Vacation mode (disables keypad)
- Audit trail (accessible via app)
- Low battery power indicator (in-app / on-device)
- Multi-lock management\*

(\* ) Local touring, lock-to-phone management, see instructions for details.

**Protocol** • BLE Pairing (128-bit encryption)

**Operation** • -31° to 150.8°F (-35° to 66°C)

**Temperature** Temperature tolerance can vary due to weather.

**Power** • DC 6V

Four (4) AA 1.5V alkaline batteries NOT included

**Function** 51 Single cylinder, thumb-turn

**Finish** 15–Satin nickel, 19–Matte black

*Other finishes available by special order*

AMM	-	F500T	-	NB	-	2	51	KD	M	-	15
TYPE		SERIES		PROTOCOL		KEYWAY	FUNCTION	KEYING	LATCH		FINISH




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE. VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, DOREX - REV.2024-09.

## SELECTION GUIDE

SERIES	DESCRIPTION	FINISH <sup>1</sup>	/CASE
AMM-F500T-NB	Smart BLE Electronic deadbolt with LED digital touch keypad. 	15, 19	6

(1) OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

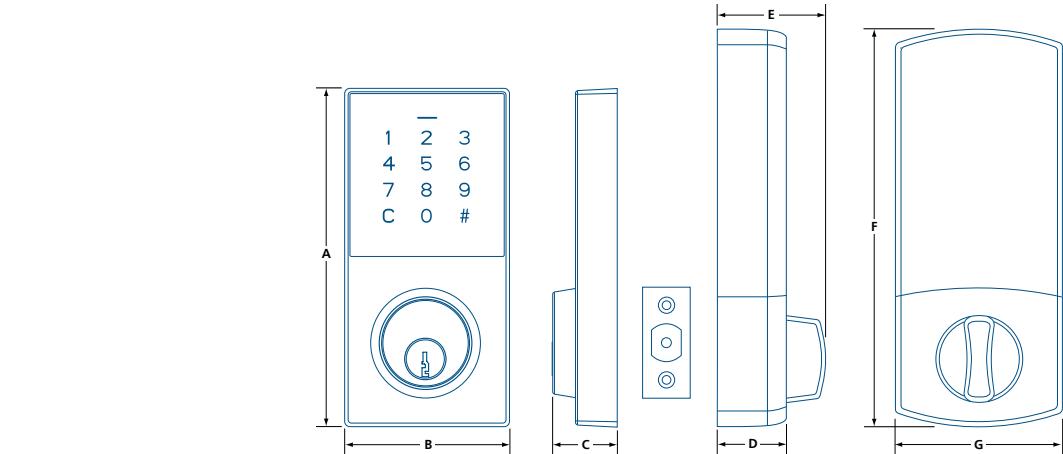

	A	B	C	D	E	F	G
F500T	5 $\frac{3}{8}$ (136)	2 $\frac{5}{8}$ (66)	1 (26)	1 $\frac{1}{8}$ (28)	1 $\frac{3}{4}$ (44)	6 $\frac{5}{16}$ (160)	2 $\frac{5}{8}$ (67)

IN (MM)

## PARTS & ACCESSORIES

**A-F4-PDW**  
11 in (28 cm) data wire.



# ER SERIES

## ELECTRONIC DEADBOLT



1  
YEAR



REMOTE CONTROL  
INCLUDED

**Certifications** • 1 Year limited warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)

**Handing** • Non handed

**Backset** • 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm), adjustable

**Deadbolt** • Steel bolt with hardened steel security pin  
• 1" (25.4 mm) throw

**Faceplate** • Mortise type, square corner  
• 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (29 x 57 mm)

**Strike** • 1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (29 x 70 mm) wood frame

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " (54 mm)  
• Edge bore: 1" (25.4 mm)

*See installation instructions for details*

**Cylinder** • 5-pin, removable cylinder  
• Weiser keyway, 2 keys

*Other keyways and keying options available*

**Electronic Features** • Battery powered\*, low battery indicator

• LED illuminated keyboard  
• Fully programmable from keyboard, no computer required  
• For up to 6 users (4 to 10 digit code)  
• Settings saved in memory  
• Visual and audio confirmation and notifications  
• Remote control (98 ft/30 m range) included  
• Auto-locking function available

(\* Four (4) AA batteries not included)

**Operating Temperature** • -4° to 185°F (-20° to 85°C)  
• 30 to 90% humidity

*Rubber gaskets prevent water penetration*

**Functions** 51 Single cylinder, thumbturn

**Styles** ER-Traditional body, SER-Contemporary body

**Finish** 11P-Antique bronze, 15-Satin nickel,  
15A-Antique nickel, 19-Matte black,  
26D-Satin chrome, V3-Polished brass (lifetime)

*Other finishes available by special order*

201	51	SER	26D	KD	U
SERIES	FUNCTION	STYLE	FINISH	KEYING	LATCH <sup>1</sup>

(1) U-UNIVERSAL LATCH, CONVERTS TO DRIVE-IN



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA - REV.2020-11.


01.410

## SELECTION GUIDE

MODEL	DESCRIPTION	FINISH
20151 ER	Electronic deadbolt with LED keypad & remote, traditional style. 	11P, 15, 15A, 19, 26D, V3
20151 SER	Electronic deadbolt with LED keypad & remote, contemporary style. 	15, 15A, 19, 26D

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

 KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

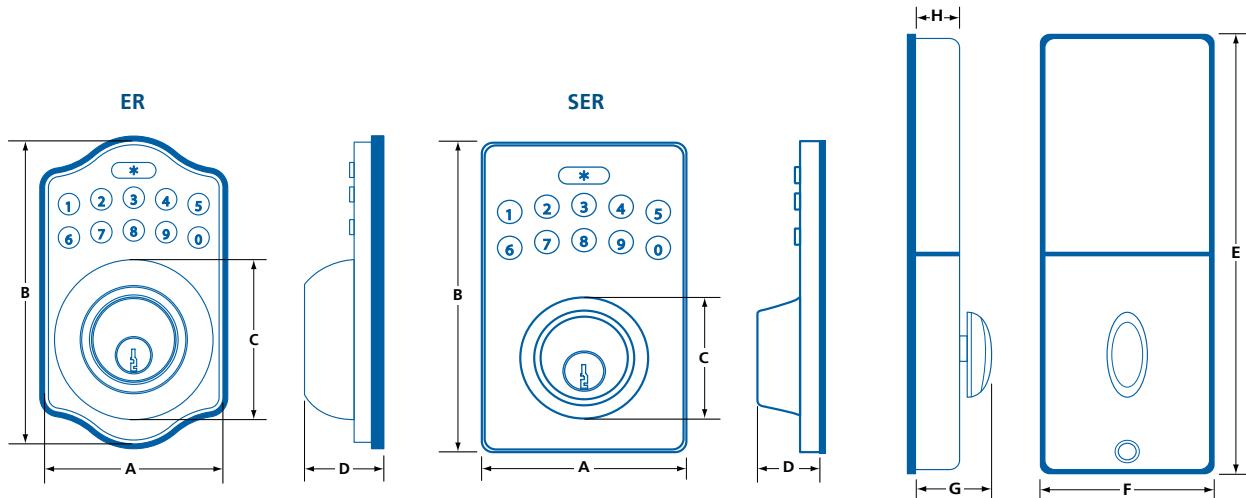

	A	B	C	D	E	F	G	H
ER	2 $\frac{7}{8}$ (73)	4 $\frac{7}{8}$ (124)	2 $\frac{9}{16}$ (65)	1 $\frac{3}{8}$ (35)	7 $\frac{1}{4}$ (184)	2 $\frac{11}{16}$ (68)	1 $\frac{3}{4}$ (44)	1 $\frac{1}{16}$ (27)
SER	3 (76)	4 $\frac{9}{16}$ (116)	1 $\frac{15}{16}$ (49)	1 $\frac{1}{8}$ (29)	7 $\frac{1}{4}$ (184)	2 $\frac{11}{16}$ (68)	1 $\frac{3}{4}$ (44)	1 $\frac{1}{16}$ (27)

IN (MM)

## PARTS & ACCESSORIES



### 200ERC

Additional remote control with override key.  
Battery included.



- Reliable, quality, and convenient modern electronic entry handleset for residential homes
- Includes F500 smart electronic deadbolt, classic interior lever and exterior handle
- Control and configure your lock using the intuitive iKey mobile application. Grant access to family, guests or service providers with a simple tap on your device. Available for both iOS and Android smartphones.

- Deadbolt conforms to ANSH/BHMA Grade 2
- UL 1034, Safety for Burglary-Resistant Electric Locking Mechanisms
- 3-year limited mechanical warranty
- 1-year limited finish warranty
- 1-year limited electronic warranty
- Non-handed, zinc die-cast exterior trim
- For doors  $1\frac{3}{4}$ – $2\frac{1}{4}$ " (44.5–57 mm) thick
- Fits standard  $2\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel tubular spring latch with adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable  $2\frac{3}{8}$ – $2\frac{3}{4}$ " (60–70 mm) backset
- Mortised faceplate with square corners, convertible to drive-in
- Integrated all-weather seal for outdoor use
- Deadbolt operated by touchscreen or key
- 5-pin brass cylinder in steel housing with 2 keys
- Full-lip strike and 2-piece deadbolt strike and dustbox included
- Handle with adjustable mounting post
- Requires 4 AA batteries (not included)

#### ELECTRONIC FEATURES

- Digital touchscreen, blue LED backlight
- 200 User credentials per lock
- PIN Codes can be single use, scheduled, or permanent
- Optional keyless entry (geofencing)
- Optional auto-lock with delay (900 sec. max.)
- Optional random keypad activation code to prevent number probing
- Vacation mode (disables keypad)
- Audit trail (accessible via app)
- Low battery power indicator (in-app / on-device)
- Multi-lock management\* – manage multiple F500 locks with one app

(\* ) Local touring, lock-to-phone management, see instructions for details.

G2



SATIN NICKEL



## SELECTION GUIDE


F500T -	NB	- LAS -	1	51	KD	M	- 15
SERIES	PROTOCOL	STYLE <sup>1</sup>	KEYWAY <sup>2</sup>	FUNCTION	KEYING	LATCH	FINISH

(1) LAS: LEVER WITH ROUND ROSE (2) 1: SCHLAGE; 2: WEISER

	10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	C5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE
<b>T500 COMBO</b>		LAS			●		●						6

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\* )LIFETIME FINISH WARRANTY

## DIMENSIONS

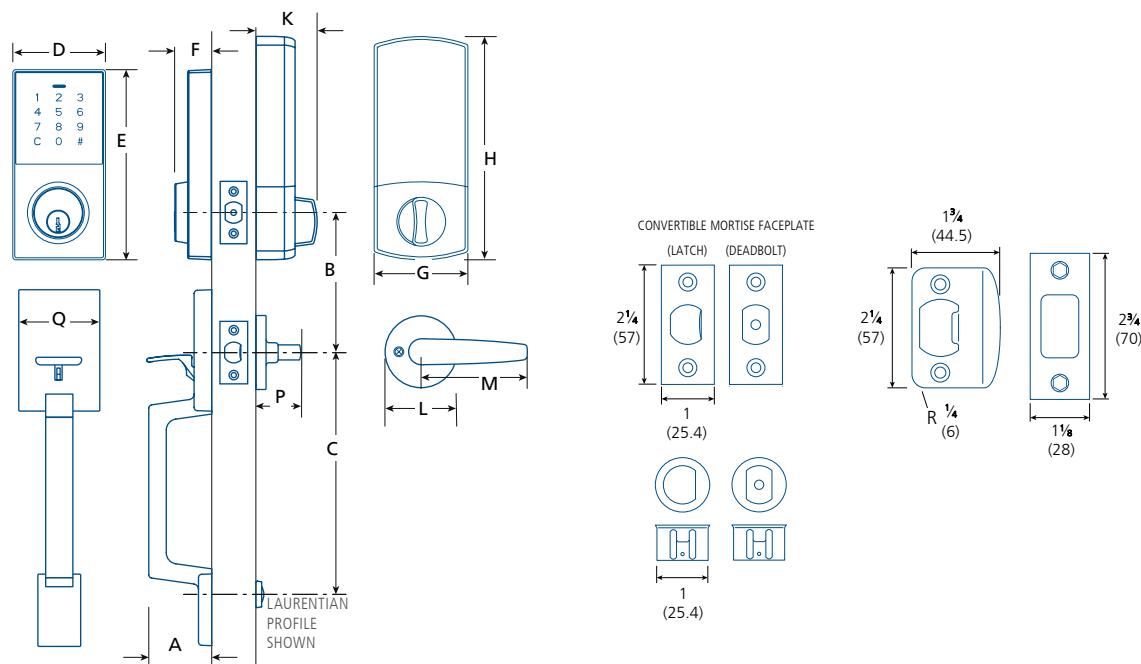

	A	B <sup>1</sup>	C	D	E	F	G	H	K	L	M	P	Q
<b>T500 COMBO LAS</b>	2 1/4 (54)	5 (127)	8 7/16 (214) 8 5/8 (219) <sup>2</sup> 8 39/32 (228)	2 3/8 (60)	5 1/2 (139)	1 (26)	2 5/8 (67)	6 5/16 (160)	1 3/4 (44)	2 9/16 (65)	3 1/2 (88.9)	2 (50.8)	2 3/16 (62)

IN (MM) (1) RECOMMENDED DISTANCE (2) DEFAULT MOUNTING DISTANCE



- Reliable and convenient modern electronic entry handleset for residential single family homes
- Concealed mounting screws
- Includes T300 electronic deadbolt, Linea interior lever and Delta exterior handle
- Interior lever can be swapped with any other Tecnica Design lever<sup>1</sup>
- Available with round or square interior trim

(1) Availability may vary, please contact your local Dorex representative.

- 3-year limited mechanical warranty
- 5-year limited finish warranty
- 1-year limited electronic warranty
- Non-handed, zinc die-cast exterior trim
- For doors 1 $\frac{3}{4}$ –2 $\frac{1}{4}$ " (44.5–57 mm) thick
- Fits standard 2 $\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge bore
- Steel tubular spring latch with adjustable 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm) backset
- Steel 1" (25.4 mm) deadbolt latch with hardened steel security pin and adjustable 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm) backset
- Mortised faceplate with square corners, convertible to drive-in
- Galvanized steel interior mechanism
- Temperature: -20° to 60°C (-4° to 140°F)
- Weiser 5-pin brass cylinder in steel housing with 2 keys
- Full-lip strike and deadbolt security strike for wood door frames included

### ELECTRONIC FEATURES

- Deadbolt operated by touchscreen keypad or key
- Can handle up to 70 user codes, and 5 renewable single-use codes
- Proximity sensor lights keypad when approached
- Anti-fingerprint surface prevents code guessing
- Touchscreen keypad stays lit for 30 seconds after activity
- Automatic locking for peace of mind
- Vacation mode deactivates the keypad while away
- Low battery indicator (audible and visible)
- Requires four (4) 1.5v AA batteries (not included)

G3



## SELECTION GUIDE


T300T -	N	-	DT	LTS	-	1	51	KD	M	-	15
SERIES	PROTOCOL	STYLE	TRIM <sup>1</sup>	KEYWAY	FUNCTION	KEYING	LATCH	FINISH			

(1) LTS: LINEA SQUARE LT: LINEA ROUND

10B OIL RUB. BRONZE	11P ANTIQUE BRONZE	15 SATIN NICKEL	15A ANTIQUE NICKEL	19 MATTE BLACK	26 POLISHED CHROME	26D SATIN CHROME	3 POLISHED BRASS	32D SATIN S.STEEL	4 SATIN BRASS	C5 ANTIQUE BRASS	V3* POLISHED BRASS	/CASE
T300 COMBO	DT											6

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (\* )LIFETIME FINISH WARRANTY

## DIMENSIONS

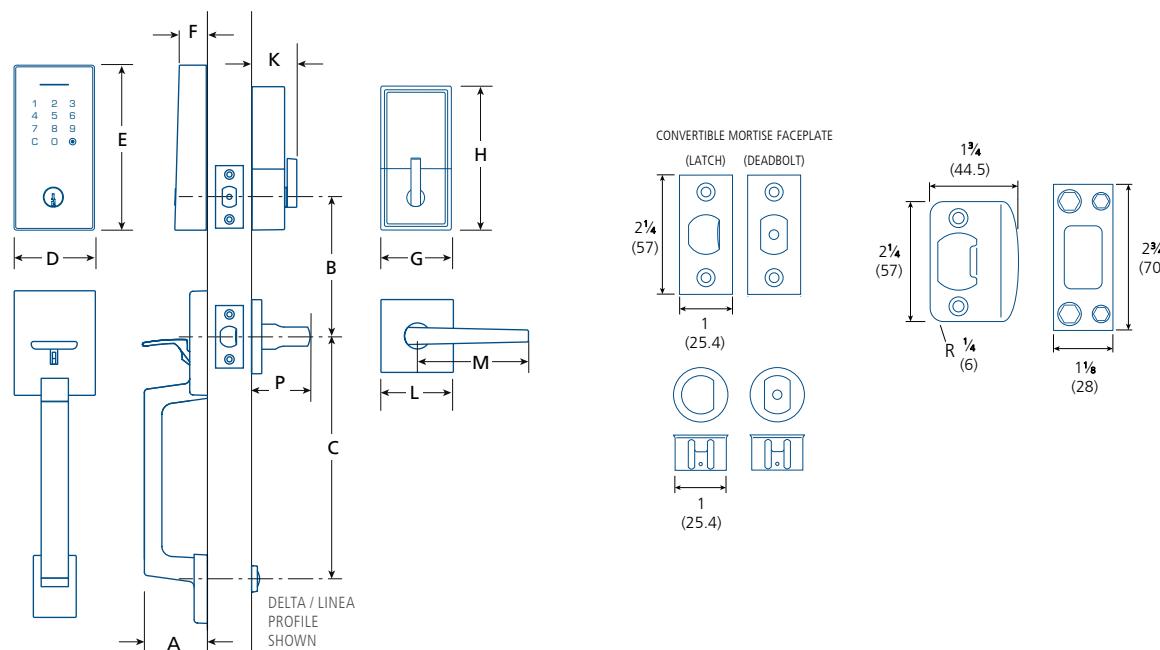

	A	B	C	D	E	F	G	H	K	L	M	P
T300 COMBO DT LTS	2 1/8 (54)	5 1 (127)	8 13/32 (214)	2 5/8 (66)	5 3/4 (146)	1 (25.4)	2 11/16 (68)	5 3/16 (132)	1 1/2 (38)	2 9/16 (64.5)	4 (102)	2 3/8 (60)

IN (MM) (1) RECOMMENDED DISTANCE



# DDL 1150 SERIES

## DIGITAL LOCKSET



**Certifications** • 1 Year limited warranty

**Door Thickness** • 1 $\frac{3}{8}$ –2" (35–51 mm)

**Handing** • Handed

**Backset** • 2 $\frac{3}{4}$ " (70 mm)  
• 2 $\frac{7}{8}$ " (60 mm) – available

**Latch** • Stainless steel deadlatch  
• 1/2" (12.7 mm) throw

**Faceplate** • Mortise type, square corners  
• 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (29 x 57 mm)

**Strike** • 1 $\frac{1}{8}$  x 2 $\frac{3}{4}$ " (29 x 70 mm)  
• Plastic dust-box

**Chassis** • Zinc alloy case with rubber seal  
• Stainless steel mechanical push buttons  
• Exposed mounting screws

**Preparation** • Cross bore: 2 $\frac{1}{8}$ " (54 mm)  
• Edge bore: 1" (25.4 mm)

**Cylinder** —

**Function** Exterior lever always locked unless unlocked by entering correct combination or by inside lever.

**Lever Style** Lever with curved return

**Finish** SC–Satin chrome

*Other finishes available by special order*

**Notes** • Recommended for indoor use only  
• Completely mechanical, no batteries required  
• Easy combination changes

1150      SC      –      LH  
SERIES    FINISH    HAND<sup>(1)</sup>


(1) LH – LEFT HAND; RH – RIGHT HAND



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA - REV.2022-05.

01.420

## DIMENSIONS

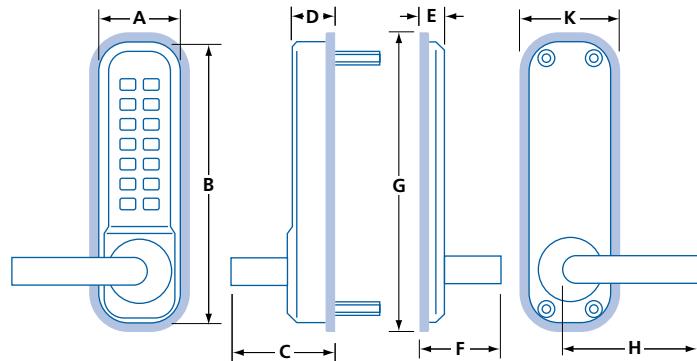

	A	B	C	D	E	F	G	H	K
<b>1150</b>	$2\frac{1}{8}$ (54)	$7\frac{5}{16}$ (185)	$2\frac{1}{2}$ (64)	$1\frac{5}{16}$ (33)	$1\frac{9}{16}$ (20)	$2\frac{1}{4}$ (57)	$7\frac{1}{2}$ (190)	$4\frac{5}{16}$ (110)	$2\frac{7}{16}$ (62)

IN (MM)

## PARTS & ACCESSORIES



**DLSC238**

Deadlatch bolt,  $2\frac{3}{8}$ " (60 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (29 x 57 mm) faceplate

**DLSC234**

Deadlatch bolt,  $2\frac{3}{4}$ " (70 mm) backset,  
 $1\frac{1}{8} \times 2\frac{1}{4}$ " (29 x 57 mm) faceplate



# DDL 2200 SERIES

## DIGITAL LOCKSET



**Certifications** • 1 Year limited warranty

**Door Thickness** •  $1\frac{3}{8}$ – $2$ " (35–51 mm)  
•  $2\frac{1}{4}$ " (57 mm) – available

**Handing** • Non handed

**Backset** •  $2\frac{3}{4}$ " (70 mm)  
•  $2\frac{3}{8}$ " (60 mm) – available  
• 2200 :  $1\frac{1}{8}$ " (28 mm)

**Latch** • 2200: deadbolt;  $\frac{7}{8}$ " (22 mm) throw  
• 2212: deadbolt with security pin;  
1" (25.4 mm) throw  
• 2230: security deadlatch;  
 $\frac{1}{2}$ " (12.7 mm) throw

**Faceplate** • Mortise type, square corners  
•  $1\frac{1}{8} \times 2\frac{1}{4}$ " (29x57 mm)  
• 2200: None, not applicable

**Strike** • T-Type;  $1\frac{1}{8} \times 2\frac{3}{4}$ " (29x70 mm)  
• Plastic dust-box  
• 2200: includes surface strike

**Chassis** • Zinc alloy case with rubber seal  
• Stainless steel mechanical push buttons  
• Exposed mounting screws

**Preparation** • Special, see installation instructions for details  
• Trim plate for installation on doors with  
 $2\frac{1}{8}$ " (54 mm) preparation – available  
• 2200: surface mounted, fits any flat surface  
door and frame

**Cylinder** —

**Function** Exterior knob always locked unless unlocked  
by entering correct combination, or by turning  
inside thumb-turn.

**Knob Style** Flat knob with ridges

*Large diameter knob available – see parts & accessories*

**Finish** AB–Antique bronze, PB–Polished brass,  
SC–Satin chrome, SN–Satin nickel

*Other finishes available by special order*

**Notes** • Recommended for indoor use only  
• Completely mechanical, no batteries required  
• Easy combination changes

2230      SC  
MODEL      FINISH




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA- REV.2023-04

01.422

## SELECTION GUIDE

MODEL	DESCRIPTION	FINISH
2200	Combination deadbolt lock, surface mounted, 1 $\frac{1}{8}$ " (28 mm) backset	SC
2212	Combination deadbolt lock, 2 $\frac{3}{4}$ " (70 mm) backset	AB, PB, SC
2230	Combination deadlatch lock, 2 $\frac{3}{4}$ " (70 mm) backset	SC, SN

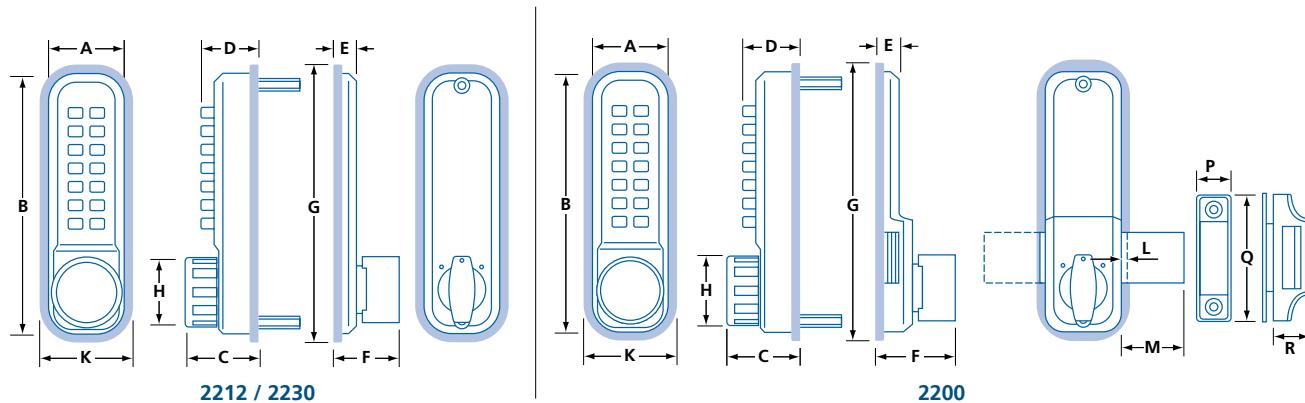

	A	B	C	D	E	F	G	H	K	L	M	P	Q	R
<b>2200</b>										$\frac{1}{16}$ (2)	$\frac{7}{8}$ (22)	$\frac{25}{32}$ (20)	$2\frac{3}{4}$ (70)	$\frac{7}{8}$ (22)
<b>2212</b>	1 $\frac{5}{8}$ (41)	5 $\frac{9}{16}$ (143)	1 $\frac{9}{16}$ (40)	1 $\frac{3}{16}$ (30)	1 $\frac{15}{32}$ (12)	1 $\frac{5}{8}$ (42)	6 (152)	1 $\frac{7}{16}$ (36)	2 (51)	—	—	—	—	—
<b>2230</b>										—	—	—	—	—

IN (MM)

## PARTS & ACCESSORIES



**DLSC238**

Deadlatch bolt, 2 $\frac{3}{8}$ " (60 mm) backset, 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (29 x 57 mm) faceplate



**KNOB**

Easy-grip knob, 1 $\frac{3}{4}$ " (44 mm) diameter.  
» Antique brass (KNOBAB)  
» Polished brass (KNOBBP)

**DLSC234**

Deadlatch bolt, 2 $\frac{3}{4}$ " (70 mm) backset, 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (29 x 57 mm) faceplate



**DBS238**

Deadbolt, 2 $\frac{3}{8}$ " (60 mm) backset, 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (29 x 57 mm) faceplate



**RP2200**

2 $\frac{1}{4}$ " (57 mm) door kit for DDL 2200.

**DBS234**

Deadbolt, 2 $\frac{3}{4}$ " (70 mm) backset, 1 $\frac{1}{8}$  x 2 $\frac{1}{4}$ " (29 x 57 mm) faceplate



**DETP**

Metal 2 $\frac{1}{2}$  x 6 $\frac{1}{2}$ " (64 x 165 mm) retro-fit trim plate for pre-drilled 2 $\frac{1}{8}$ " (54 mm) doors.



**RP2210**

2 $\frac{1}{4}$ " (57 mm) door kit for DDL 2212,2230.

**DET**

Rubber 2 $\frac{1}{2}$  x 6 $\frac{1}{2}$ " (64 x 165 mm) retro-fit trim gasket for pre-drilled 2 $\frac{1}{8}$ " (54 mm) doors.



# PF SERIES

## GLASS DOOR LOCKS



PF210  
PASSAGE

1  
YEAR



PF251  
ENTRY (KIK CYLINDER)



PF251P  
PROFILE CYLINDER

### Warranty

- 1 Year limited warranty

### Panel Thickness

- For tempered glass panels

- $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick
- $\frac{19}{32}$ " (15 mm) extension kit (#PF2-EXT)

### Handing

- Handed, field reversible\*

(\* Handing conversion is possible only from LH to RH or LHR to RHR (and vice versa). See handing guide.

### Spring Latch

- Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw
- Derlin stripe for silent/smooth operation

### Strike

- ASA strike – available
- Metal frame strike – available
- Glass panel strike – available

Strikes not included, sold separately.  
See Parts & Accessories

### Trim

- High strength zinc-alloy body
- Stainless steel covers

Levers not included, sold separately.  
See Parts & Accessories

### Chassis

- Concealed mounting
- Shims and gaskets included

### Preparation

- Glass cut-out required. See installation instructions for details

### Cylinder

- 5-pin KIK cylinder
- Schlage "C" keyway, 2 keys
- Removable, rekeyable

Other keyways and keying options available.

### Functions

- 200 Glass panel strike

- 210 Passage

- 251 Entry

- 251P Entry, profile cylinder (less core)

### Levers

- Wide variety of lever styles
- Sold separately – see Parts & Accessories

### Finish

- 630–Satin stainless steel
- 19–Matte black\*

(\* Special order. Other finishes also available by special order

PF	251	LH	–	630
SERIES	FUNCTION <sup>(1)</sup>	HAND		FINISH

(1) SEE SELECTION CHART FOR DETAILS

(2) LH: LEFT RH: RIGHT LHR: LEFT, REVERSED RHR: RIGHT, REVERSED



ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, REV.2023-06.



01.500

## SELECTION GUIDE

SERIES	FUNCTION / DESCRIPTION	FINISH <sup>1</sup>	/ CASE
PF	210 Passage	630, 19*	20
PF	251 Entry, KIK cylinder included ●	630, 19*	20
PF	251P Entry, profile cylinder (less core) ●	630, 19*	20
PF	200 Strike for glass side panel	630, 19*	**

(1) OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED. (\*) SPECIAL ORDER, MAY REQUIRE ADDITIONAL DELIVERY TIME

(\*\*) CONTACT LOCAL REPRESENTATIVE FOR DETAILS. ● KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

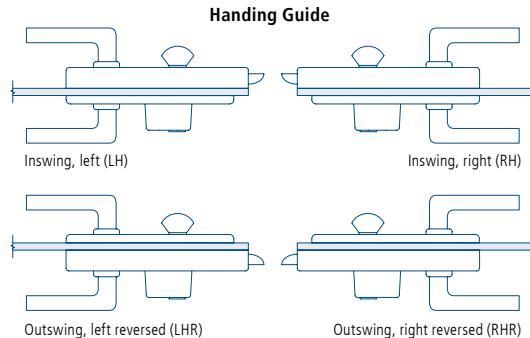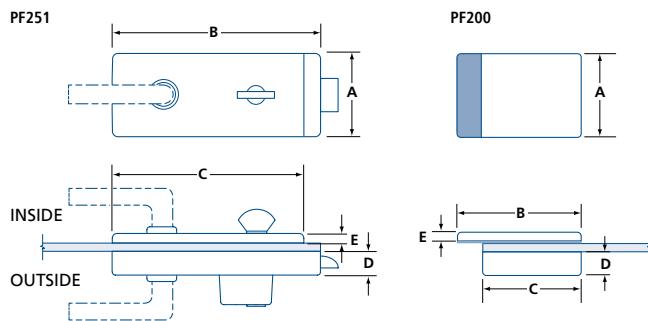

	A	B	C	D	E
PF210	2 $\frac{5}{8}$ (67)	6 $\frac{1}{2}$ (165)	5 $\frac{7}{8}$ (150)	7/8 (22)	5/16 (8)
PF251	2 $\frac{5}{8}$ (67)	3 (76)	2 $\frac{3}{8}$ (60)	7/8 (22)	5/16 (8)
PF200	2 $\frac{5}{8}$ (67)	3 (76)	2 $\frac{3}{8}$ (60)	7/8 (22)	5/16 (8)

IN (MM)

## PARTS & ACCESSORIES

Additional lever styles available by special order - see Architectural Lever Styles.  
Please contact your local sales representative for details.



**PFL001-32D**

Straight lever style (sold in pairs).



**PFL018-32D**

Curved lever style (sold in pairs).



**CBPT1530-SCKD-15**

Schlage "C" keyway profile cylinder with thumb-turn. For LH/RH PF251P locks.



**CBPT3131-SCKD-15**

Schlage "C" keyway profile cylinder with thumb-turn. For LHR/RHR PF251P lock.



**9203**

Viro profile cylinder, brass plated. Required for master key systems with PF251P.



**LS01**

For metal door frames 1 $\frac{3}{4}$ " to 2" (44.5 mm to 50 mm) thick. Includes dust-box, mounting plate and machine screws.



**ASAC15**

ASA strike for 1 $\frac{3}{4}$ " to 2" (44.5 mm to 50 mm) door frame. 1 $\frac{1}{4}$  x 4 $\frac{7}{8}$ " (32 x 124 mm)



**PF200**

Patch fitting lock strike for glass side panel up to 1 $\frac{9}{32}$ " (15 mm) thick.



**PF2-EXT**

Extension kit for panel thicknesses up to 1 $\frac{9}{32}$ " (15 mm). For PF210 or PF251.



# PF SERIES

## GLASS DOOR FLOOR DEADBOLTS



PF181  
FLOOR DEADBOLT



PF180  
FLOOR DEADBOLT



**Warranty** • 1 Year limited warranty

**Panel Thickness** • For tempered glass panels  
5/16–1/2" (8–12.7 mm) thick

**Handing** • Non-handed

**Deadbolt** • Solid zinc-alloy floor bolt  
• 1 1/16" (17.5 mm) throw  
• PF180: round bolt, 3/32" (2.4 mm) thick  
• PF181: flat bolt, 3/32" (2.4 mm) thick

**Strike** • Steel floor strike  
• Dust-proof floor strike – available\*  
(\*) For PF180 only. See Parts & Accessories

**Trim** • High strength zinc-alloy body  
• Stainless steel covers

**Chassis** • Concealed mounting  
• Shims and gaskets included

**Preparation** • Glass cut-out required. See installation instructions for details

**Cylinder** • PF180: 4-pin profile double cylinder  
• PF181: 5-pin profile double cylinder  
• Yale keyway, 3 keys

*Other keyways and keying options available.*

**Finish** 630–Satin stainless steel  
19–Matte black\*

*(\*) Special order. Other finishes also available by special order*

PF	180	–	630
SERIES	FUNCTION <sup>(1)</sup>		FINISH

(1) SEE SELECTION CHART FOR DETAILS




ALL IMAGES, ILLUSTRATIONS AND DIMENSIONS, IN (MM), ARE FOR REFERENCE ONLY. PRODUCT DETAILS MAY CHANGE WITHOUT NOTICE.  
VISIT WWW.CANAROPA.COM OR CONTACT FOR MORE DETAILS. DISTRIBUTED BY CANAROPA. © CANAROPA, REV.2022-07.

01.510

## SELECTION GUIDE

SERIES	FUNCTION / DESCRIPTION	FINISH <sup>1</sup>	/ CASE
PF181	Flat floor bolt, 5-pin profile double cylinder	630, 19*	**
PF180	Round floor bolt, 4-pin profile double cylinder	630, 19*	**

(1) OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED. (\*) SPECIAL ORDER, MAY REQUIRE ADDITIONAL DELIVERY TIME  
 (\*\*) CONTACT LOCAL REPRESENTATIVE FOR DETAILS. ● KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

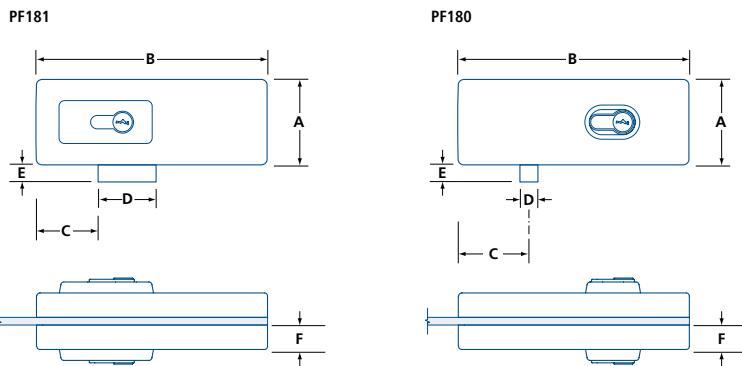

	A	B	C	D	E	F
PF181	2 (51)	6 $\frac{7}{16}$ (163.3)	2 $\frac{1}{8}$ (54)	1 $\frac{7}{16}$ (36)	1 $\frac{1}{16}$ (17.5)	$\frac{3}{8}$ (9)
PF180	2 (51)	6 $\frac{7}{16}$ (163.3)	3 $\frac{15}{32}$ (87.7)	$\frac{9}{16}$ (14.6)	1 $\frac{1}{16}$ (17.5)	$\frac{5}{16}$ (8)

IN (MM)

## PARTS & ACCESSORIES



**CBPT3131-SCKD-15**

Schlage "C" keyway profile cylinder with thumb-turn for PF181 locks.



**9203**

Viro profile cylinder, brass plated. Required for master key systems with PF181.



**T840**

Aluminum dust-proof strike with spring loaded plunger;  $\frac{3}{4}$ " (19 mm) engagement depth. Can be used with PF180. See page 06.305.



**DSP / DSPL**

Adjustable stainless steel dust-proof strike with spring loaded plunger;  $\frac{3}{4}$ " (19 mm) engagement depth. Available with locking (DSPL) and non-locking plunger (DSP). Can be used with PF180. See page 06.305.



# DOREX® PLH900

UNIVERSAL PATCH LOCK & STRIKE HOUSING



**PLH900**UNIVERSAL PATCH LOCK  
& STRIKE HOUSING SYSTEM

PLH901ESL-630

PLH900DM84LS-630

The **PLH900** redefines flexibility in glass door security. Unlike fixed-format systems, the PLH900 is a universal housing and strike solution engineered to support a wide range of DOREX locks. Whether you're installing mortise center locks, cylindrical locks, deadbolts, or even electric strikes, the PLH900 adapts—making it the most versatile option for interior glass applications in commercial and architectural environments.

Designed for strength, compatibility, and clean aesthetics, the PLH900 is ideal for offices, storefronts, and modern interiors where adaptability and performance are key.

**UNIVERSAL LOCK HOUSING**

The PLH900 supports DOREX mortise center locks, cylindrical door locks, and deadbolt locks.

**UNIVERSAL STRIKE HOUSING**

The PLH901 accepts common lock strikes, deadbolt strikes included with your DOREX lock, or the SGT78 electric strike for access control integration.

**ARCHITECTURAL DESIGN**

Concealed mounting screws offer a clean contemporary finish, designed to complement any glass door or glass door partition system.

**MODULAR & FUTURE-PROOF DESIGN**

The PLH900 is built with modularity in mind. With a simple internal adjustment and new housing covers, the PLH900 can be reconfigured for different lock types, handing and glass thickness. No new housing required, just a new lock and covers.

**EASY INSTALLATION & RETROFIT-FRIENDLY**

Designed for flexible installation in new or retrofit projects with minimal modifications and no silicone adhesives. Can fit existing popular glass door preparations.

**HEAVY-DUTY PERFORMANCE**

Engineered for high-traffic commercial settings, ensuring long-term reliability and durability.

## TECHNICAL SPECIFICATIONS

**Housing Dimensions** • 6" x 10" (152.4 x 254 mm) with covers

**Material** • Machined aluminum housing with removable stainless-steel covers

**Glass Thickness** • 10mm–12.7mm (3/8" to 1/2")

**Projection** • 7/8" (22.2 mm) from glass surface

**Lock Compatibility** (with PLH900)

- Mortise center locks: DOREX DM (all functions)\*
- Cylindrical locks: DOREX F1, GX1, F, T2, RW, CW, EM, TL
- Deadbolt locks: DOREX GX1A, TLA, FHA, DG1, DG2, F500

(\* When paired with PLH901ES and/or SGT78 electric strike, the number of available functions is limited to non-deadbolt functions.

**Strike Compatibility** (with PLH901)

- Dorex DM strikes (all functions)
- Standard ASA strike 1 1/8 x 2 3/4 in (29 x 70 mm)
- Common deadbolt strike 1 1/8 x 2 3/4 in (29 x 70 mm)
- SGT78 Electric Strike

**Electric Strike Compatibility** (with door frame)

- SGT78 Electric Strike - sold separately
- CX-ED1579L Electric Strike - sold separately

**NOTE:** When PLH900 is installed within a standard door frame, any electric strike can be used, provided that it can accommodate the lock and function installed.

**Warranty**

- 1-year limited warranty
- Installed locks and electric strikes are covered by their own warranties.

**Application** Interior tempered glass doors. Ideal for:

- Commercial Office Fronts
- Sheltered Retail Storefronts
- Hospitality Suites
- Medical & Institutional Interiors
- Access-Controlled Glass Partitions

## Finishes



630  
SATIN  
STAINLESS STEEL



630  
MATTE  
BLACK






SS15P  
SATIN STEEL WITH  
ANTI-FINGERPRINT COATING\*

\*COATING AFFECTS APPEARANCE OF THE FINISH; RESEMBLES SATIN NICKEL.

## DIMENSIONS

PLH900 and PLH901 have the same overall dimensions.

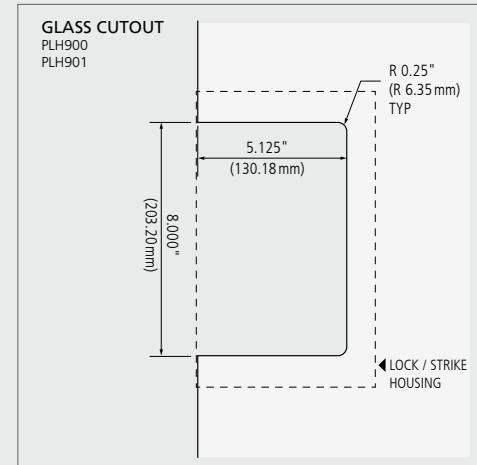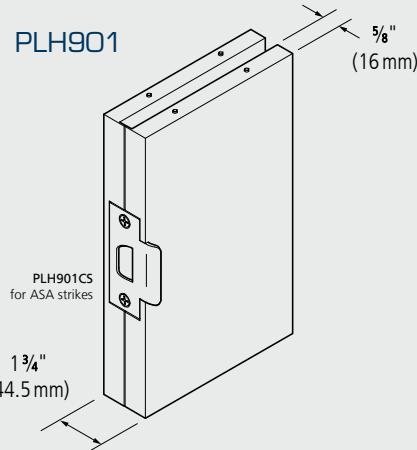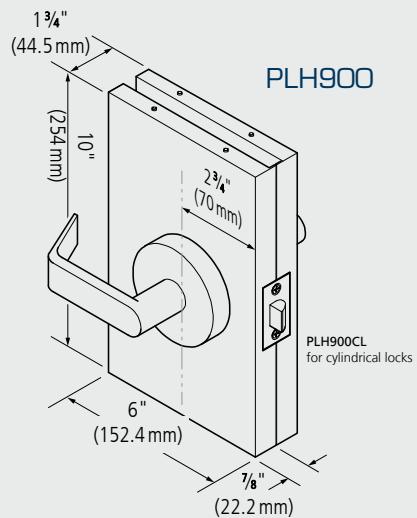


\* Accommodates glass cuts for CLM9000, DL61 models with included brackets.  
\* See installation instructions for details.

## HOW TO ORDER


Begin by selecting the lock type and function required, then determine handing if required.

## DOOR HANDING GUIDE


Always determined from the outside facing in.




## LEFT HAND REVERSED (LHR)




## RIGHT HAND (RH)



## RIGHT HAND REVERSED (RHR)



## PLH900 LOCK HOUSING



Locks are sold separately.

DM - MORTISE  
CL - CYLINDRICAL\*  
DB - DEADBOLT\*

(\* FULLY REVERSIBLE, NO FUNCTION, HANDING, OR TRIM INDICATION IS REQUIRED.)

10 - PASSAGE  
42 - PRIVACY  
45 - ENTRY  
50 - OFFICE\*  
56 - DORMITORY  
70 - CLASSROOM\*  
80 - STOREROOM\*  
84 - STOREROOM W/ DEADBOLT

(\* WHEN PAIRED WITH PLH901ES AND/OR SGT78 ELECTRIC STRIKE, ONLY THESE NON-DEADBOLT FUNCTIONS ARE AVAILABLE.)


630 - SATIN STAINLESS STEEL  
693 - MATTE BLACK  
SS15P - SATIN STEEL, ANTI-FINGERPRINT

S - SECTIONAL  
E - ESCUTCHEON\*

(\* ACCEPTS DM STANDARD (E) AND EXTENDED (EZ) ESCUTCHEON.)

R - RIGHT  
L - LEFT

## PLH901 STRIKE/KEEPER HOUSING



Basic strikes are included with purchased locks.

Electric strike sold separately.

MS - MORTISE  
CS - CYLINDRICAL  
DS - DEADBOLT\*  
ES - ELECTRIC STRIKE  
(SGT78 ONLY)\*\*

(\* FULLY REVERSIBLE, NO HANDING INDICATION REQUIRED.)  
(\*\*) SGT78 SOLD SEPARATELY

R - RIGHT (RH OR LHR)  
L - LEFT (LH OR RHR)

630 - SATIN STAINLESS STEEL  
693 - MATTE BLACK  
SS15P - SATIN STEEL,  
ANTI-FINGERPRINT

MODEL	DESCRIPTION	COMPATIBLE PRODUCTS
PLH 900 DM	Patch lock housing, DM mortise lockset Indicate handing, trim type, and lock function. Covers are not reversible.	DOREX DM (all functions) <sup>1</sup>
PLH 900 CL	Patch lock housing, cylindrical lockset Non-handed, covers are reversible.	DOREX F1, GX1, F, T2, RW, CW, EM, TL
PLH 900 DB	Patch lock housing, deadbolt lockset Non-handed, covers are reversible.	DOREX GX1A, TLA, FHA, DG1, DG2, F500
PLH 901 MS	Patch strike housing, mortise lock strike Indicate handing, covers are not reversible.	DOREX DM strikes (all functions)
PLH 901 CS	Patch strike housing, cylindrical lock strike Indicate handing, covers are not reversible.	Standard ASA strike
PLH 901 DS	Patch strike housing, deadbolt lock strike Non-handed, covers are reversible.	Deadbolt strike; 1 1/8 x 2 3/4 in (29 x 70mm)
PLH 901 ES	Patch strike housing, SGT78 electric strike Indicate handing, covers are not reversible.	SGT78 Electric Strike

<sup>1</sup>(1) WHEN PAIRED WITH PLH901ES AND/OR SGT78 ELECTRIC STRIKE, THE NUMBER OF AVAILABLE FUNCTIONS IS LIMITED TO NON-DEADBOLT FUNCTIONS.

## Need Help?

Our door hardware professionals are always available to help you determine the best door hardware configuration for your opening or application.

Don't hesitate – take advantage of our experience and contact your local Canaropa branch or office.