



BHMA
CERTIFIED

G1

UL
LISTED

3H

ADA

8

10
YEAR

NOTE: F1S is only available by special order; minimum order quantities and additional delivery times may be required.

- Type** • Cylindrical lock
- Certifications**
 - Certified ANSI/BHMA A156.2, Series 4000, Grade 1
 - cULus listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - Meets ADA requirements
 - 10 Year limited warranty
- Door Thickness** • 1³/₈–2¹/₄" (35–57 mm)
- Handing** • Non handed
- Backset**
 - 2³/₄" (70 mm)
 - 2³/₈" (60 mm) – available
- Spring Latch**
 - Stainless steel, 1/2" (12.7 mm) throw
 - Deadlatch, 3/4" (19 mm) throw – available
- Faceplate**
 - Mortise type, square corners
 - 1¹/₈x2¹/₄" (28.5x57 mm)
- Strike** • ASA Strike
- Trim**
 - Solid, pressure cast heavy duty lever
 - Lever secured by additional set screw
 - Brass rose
 - Rose diameter: 3¹/₂" (89 mm)
- Chassis**
 - Concealed mounting plate and screws
 - Fixed security posts
 - Lever clutch release
- Preparation**
 - Cross bore: 2¹/₈" (54 mm)
 - Edge bore: 1" (25.4 mm)
- Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () BEST® and CX5® cores sold separately.*
- Functions**

10 Passage	53 Entry
17 Dummy, single	70 Classroom
42 Privacy	80 Storeroom
- Lever Style** S–Straight; no return
- Finish** 26D–Satin chrome
Other finishes available by special order

F1	S	53	26D	238
SERIES	STYLE	FUNCTION	FINISH	OPTION ¹


(1) OPTION: 238 2-3/8IN (60MM) BACKSET

SELECTION GUIDE

SERIES	STYLE	FUNCTION ¹	FINISH ¹	/ CASE
F1	S	10 Passage	26D	6
F1	S	17 Dummy, single	26D	12
F1	S	42 Privacy	26D	6
F1	S	53 Entry ↔	26D	6
F1	S	70 Classroom ↔	26D	6
F1	S	80 Storeroom ↔	26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

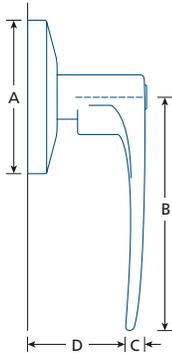

		A	B	C	D*
F1S		3½ (89)	5 (127)	¾ (19)	2¾/16 (56)

IN (MM)

(*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106

T-Strike, square corners:
1½x2¾" (28.5x70 mm)

9106NH

T-Strike, no hole; square corners:
1½x2¾" (28.5x70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



F1001

Passage latch: 2¾" (60 mm) backset,
1½x2¼" (28.5x57 mm) faceplate



F1010

Privacy latch: 2¾" (60 mm) backset,
1½x2¼" (28.5x57 mm) faceplate



F1005

Deadlatch: 2¾" (60 mm) backset,
1½x2¼" (28.5x57 mm) faceplate

F1DL234-34

Deadlatch: 2¾" (70 mm) backset, ¾" (19 mm)
throw. 1½x2¼" (28.5x57 mm) faceplate
*For use in double door or electric strike
applications*

