



F1H



- Type** • Cylindrical lock
- Certifications**
 - Certified ANSI/BHMA A156.2, Series 4000, Grade 1
 - cULus listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - Meets ADA requirements
 - 10 Year limited warranty
- Door Thickness** • 1³/₈–2¹/₄" (35–57 mm)
- Handing** • Non handed
- Backset**
 - 2³/₄" (70 mm)
 - 2³/₈" (60 mm) – available
- Spring Latch**
 - Stainless steel, 1/2" (12.7 mm) throw
 - Deadlatch, 3/4" (19 mm) throw – available
- Faceplate**
 - Mortise type, square corners
 - 1¹/₈x2¹/₄" (28.5x57 mm)
- Strike** • ASA Strike
- Trim**
 - Solid, pressure cast heavy duty lever
 - Lever secured by additional set screw
 - Brass rose
 - Rose diameter: 3¹/₂" (89 mm)

- Chassis**
 - Concealed mounting plate and screws
 - Fixed security posts
 - Lever clutch release

- Preparation**
 - Cross bore: 2¹/₈" (54 mm)
 - Edge bore: 1" (25.4 mm)

- Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () BEST® and CX5® cores sold separately.*

- | | | |
|------------------|------------------|--------------|
| Functions | 10 Passage | 53 Entry |
| | 17 Dummy, single | 70 Classroom |
| | 42 Privacy | 80 Storeroom |

- Lever Styles** C–Curved return*, H–Standard return, S–Straight; no return*

() Special order.*

- Finish** 26D–Satin chrome

Other finishes available by special order.

F1	H	53	26D	238
SERIES	STYLE	FUNCTION	FINISH	OPTION ¹


(1) OPTION: 238 2-3/8IN (60MM) BACKSET

SELECTION GUIDE

SERIES	STYLE	FUNCTION ²	FINISH ²	/ CASE
F1	C ¹ , H, S ¹	10 Passage	26D	6
F1	C ¹ , H, S ¹	17 Dummy, single	26D	12
F1	C ¹ , H, S ¹	42 Privacy	26D	6
F1	C ¹ , H, S ¹	53 Entry ↔	26D	6
F1	C ¹ , H, S ¹	70 Classroom ↔	26D	6
F1	C ¹ , H, S ¹	80 Storeroom ↔	26D	6

(1) SPECIAL ORDER. (2) OTHER FINISHES AND FUNCTIONS AVAILABLE BY SPECIAL ORDER. MAY REQUIRE MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES.

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

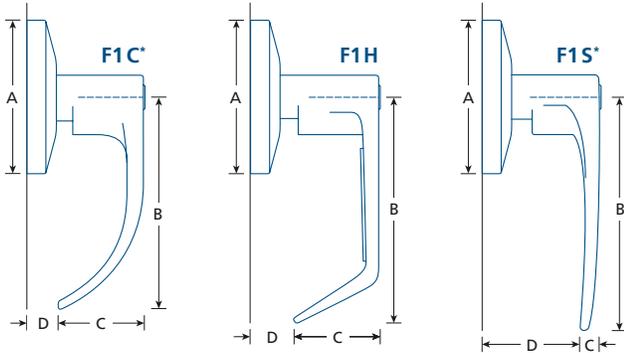

(*) SPECIAL ORDER.

		A	B	C	D*
F1C	Ⓛ	3½ (89)	4½ (114)	2½ (63.3)	5⁄8 (16)
F1H	Ⓛ	3½ (89)	5 (127)	2½ (63.3)	1½ (12.7)
F1S	Ⓛ	3½ (89)	5 (127)	¾ (19)	2¾⁄16 (56)

IN (MM) (*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106

T-Strike, square corners:
1½x2¾" (28.5x70 mm)

9106NH

T-Strike, no hole; square corners:
1½x2¾" (28.5x70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



F1001

Passage latch: 2¾" (60 mm) backset,
1½x2¼" (28.5x57 mm) faceplate



F1010

Privacy latch: 2¾" (60 mm) backset,
1½x2¼" (28.5x57 mm) faceplate



F1005

Deadlatch: 2¾" (60 mm) backset,
1½x2¼" (28.5x57 mm) faceplate

F1DL234-34

Deadlatch: 2¾" (70 mm) backset, ¾" (19 mm)
throw. 1½x2¼" (28.5x57 mm) faceplate
For use in double door or electric strike applications

