



**Type** • Cylindrical lock

- Certifications**
- Conforms to ANSI/BHMA A156.2, Series 4000, Grade 1
  - cULus listed, 3hr fire-rating
  - UL 10C Positive Pressure Rating
  - Meets ADA requirements
  - 10 Year limited warranty

- Door Thickness**
- 1 $\frac{3}{8}$ –2" (35–51mm)
  - SFIC Models: 1 $\frac{1}{8}$ –2" (40–51mm)

**Handing** • Non handed

- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
  - 2 $\frac{5}{8}$ " (60 mm) – available
  - 3 $\frac{3}{4}$ " (95 mm) – available
  - 5" (127 mm) – available

- Spring Latch**
- Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw
  - Deadlatch,  $\frac{3}{4}$ " (19 mm) throw – available

- Faceplate**
- Mortise type, square corners
  - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)

**Strike** • ASA Strike

- Trim**
- Solid, pressure cast lever
  - Brass rose
  - Rose diameter: 3 $\frac{3}{16}$ " (90 mm)

- Chassis**
- Concealed mounting plate and screws
  - Fixed security posts
  - Lever clutch release

- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
  - Edge bore: 1" (25.4 mm)

- Cylinder**
- Solid brass, 6-pin
  - Schlage "C" keyway, 2 keys
  - Removable, rekeyable
  - Small format interchangeable core (SFIC) model – available\*

*Other keyways and keying options available, including CX5 high security. (\*) BEST® and CX5® cores sold separately.*

<b>Functions</b>	<b>10</b> Passage	<b>70</b> Classroom
	<b>15</b> Exit	<b>70IC</b> Classroom SFIC*
	<b>42</b> Privacy	<b>80</b> Storeroom
	<b>53</b> Entry	<b>80IC</b> Storeroom SFIC*
	<b>53IC</b> Entry SFIC*	

*(\*) Interchangeable core not included, sold separately.*

**Finish** C26D–Satin chrome

*Other finishes available by special order*


GX1C	53	C26D
SERIES	FUNCTION	FINISH


## SELECTION GUIDE

SERIES	FUNCTION <sup>1</sup>	FINISH <sup>1</sup>	/CASE
GX1C	10 Passage	C26D	6
GX1C	15 Exit	C26D	6
GX1C	42 Privacy	C26D	6
GX1C	53 Entry ↔	C26D	6
GX1C	53IC Entry SFIC, less core ↔	C26D	6
GX1C	70 Classroom ↔	C26D	6
GX1C	70IC Classroom SFIC, less core ↔	C26D	6
GX1C	80 Storeroom ↔	C26D	6
GX1C	80IC Storeroom SFIC, less core ↔	C26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED.

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

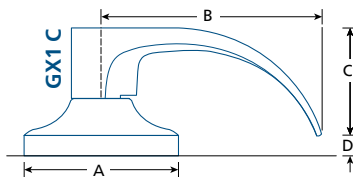

	A	B	C	D*
GX1C 	3 <sup>9</sup> / <sub>16</sub> (90)	5 (127)	2 <sup>5</sup> / <sub>8</sub> (66.7)	5 <sup>1</sup> / <sub>16</sub> (8)

IN (MM) (\*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

## PARTS & ACCESSORIES



**9106**  
T-Strike, square corners:  
1<sup>1</sup>/<sub>8</sub>x2<sup>3</sup>/<sub>4</sub>" (28.5x70 mm)

**9106NH**  
T-Strike, no hole; square corners:  
1<sup>1</sup>/<sub>8</sub>x2<sup>3</sup>/<sub>4</sub>" (28.5x70 mm)



**ASA-T**  
ASA strike with adjustable tab

**ASANH**  
ASA strike, no hole



**9807**  
CX5 high security SFIC core, 7 pin, 0 bitted

**CBI-BF6KD-26D**  
BEST@ F type SFIC core, 6 pin, keyed different

**CBI-BF7KD-26D**  
BEST@ F type SFIC core, 7 pin, keyed different



**GX1SL238**  
Passage latch: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**GX1SL234**  
Passage latch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**GX1PL238**  
Privacy latch: 2<sup>3</sup>/<sub>8</sub>" (60 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**GX1PL234**  
Privacy latch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**GX1DL238**  
Deadlatch: 2<sup>3</sup>/<sub>8</sub>" (60) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**GX1DL234**  
Deadlatch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate



**GX1DL234-34**  
Deadlatch: 2<sup>3</sup>/<sub>4</sub>" (70 mm) backset, <sup>3</sup>/<sub>4</sub>" (19 mm) throw,  
1<sup>1</sup>/<sub>8</sub>x2<sup>1</sup>/<sub>4</sub>" (28.5x57 mm) faceplate  
*For use in double door or electric strike applications*



**GX1LE334**  
Backset extension to 3<sup>3</sup>/<sub>4</sub>" (95 mm); use with  
2<sup>3</sup>/<sub>8</sub>" (60 mm) backset latch

**GX1LE500**  
Backset extension to 5" (127 mm); use with  
2<sup>3</sup>/<sub>4</sub>" (70 mm) backset latch

