




LS  
Square rose


- Type** • Interconnected tubular lock
- Certifications**
- Conforms to ANSI/BHMA A156.12, Grade 2
  - cULus listed, 3 hour fire-rating
  - UL10C Positive Pressure Rating
  - Lever meets ADA requirements
  - 1 Year limited warranty
- Door Thickness** • 1¾–2½" (45–55 mm)
- Handing** • Non handed
- Backset** • 2¾ – 2¾" (60–70 mm), adjustable
- Spring Latch**
- Stainless steel
  - ½" (12.5 mm) throw
- Deadbolt**
- Steel with hardened steel security pin
  - 1" (25.4 mm) throw
- Faceplate**
- Mortise type, square corners
  - 1½x2¼" (28.5x57 mm)
- Strikes**
- T-Strike: 1½x2¾" (28x70 mm)
  - Deadbolt strike: 1½x2¾" (28x70 mm)
  - Plastic dust-boxes


- Interior Escutcheon** • 8½x2¾" (216x70 mm)
- Chassis**
- Concealed mounting screws
  - Visible lever set-screws
  - Single action egress
- Preparation**
- 5½" (140 mm) centre-to-centre installation
  - Cross bore: 2½" (54 mm)
  - Edge bore: 1" (25.4 mm)
- Cylinder**
- Solid brass, 6-pin
  - Schlage "C" keyway, 2 keys
- Function** 55 Suite entry, single lock, with single action egress
- Lever Styles** L–Lina, LS–Lina (square rose)  
*Other lever styles available by special order*
- Finish** 15–Satin nickel, 19–Matte black  
*Other finishes available by special order*

T2IL	55	L	-	15	KD	M
SERIES	FUNCTION	STYLE	FINISH	KEYING	LATCH	

## SELECTION GUIDE

SERIES	FUNCTION	LEVER	FINISH	/CASE
T2 IL	55 Suite entry, single lock, with single action egress 	L, LS	15, 19	10

OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED  
 KEYED FUNCTION

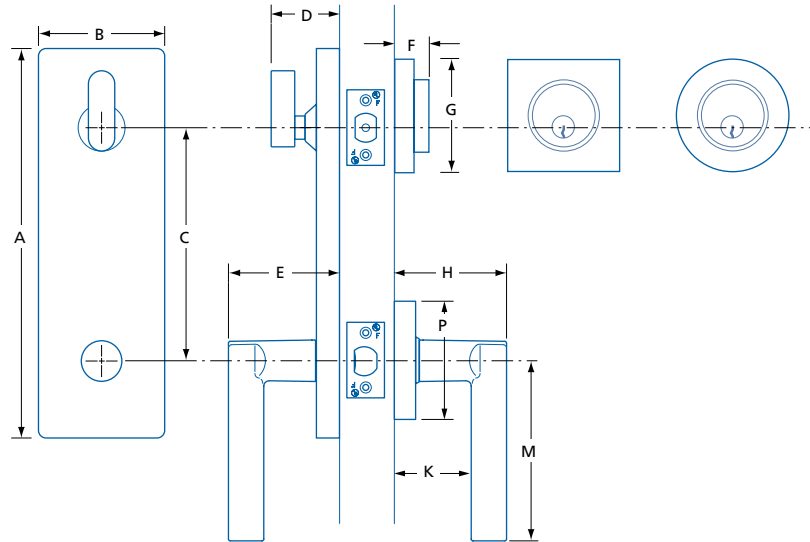

	A	B	C	D	E	F	G	H	K	M	P
<b>T2 IL</b>	8½ (216)	2¾ (70)	5½ (140)	1½ (38)	2½ (63.5)	¾ (19)	2½ (63.5)	2½ (63.5)	1⅝ (41.3)	4 (101.6)	2½ (63.5)

IN (MM)

