



ARCO
MATTE BLACK



PLATO
SATIN NICKEL

SPECIFICATIONS


- Certifications**
 - 25 Year limited mechanical warranty
 - 5 Year limited finish warranty
- Door Thickness** • 1¾–2¼" (44.5–57 mm)
- Handing** • Non handed
- Backset** • 2¾ – 2¾" (60–70 mm), adjustable
- Spring Latch**
 - Solid zinc alloy
 - ½" (12.7 mm) throw
- Deadbolt**
 - Steel deadbolt with hardened steel security pin
 - 1" (25.4 mm) throw
- Faceplate**
 - 4-Way type (W), square corner; convertible to drive-in
 - 1 x 2¼" (25.4 x 57 mm)
- Strike**
 - Full-lip strike, round corner 1¾ x 2¼" (44.5 x 57 mm)
 - Deadbolt strike, round corner 1½ x 2¾" (29 x 70 mm)
- Exterior Trim** • Zinc die-cast handle
- Interior Trim**
 - Standard lever, square rose
 - Square thumb-turn trim
 - Round trim and rose available
- Mounting**
 - Concealed mounting screws
 - All mounting hardware included
- Preparation**
 - Cross bore: 2⅞" (54 mm)
 - Edge bore: 1" (25.4 mm)
 - Plato: 5½" (140 mm) center-to-center
- Cylinder**
 - 5-pin cylinder
 - Weiser keyway
 - 2 keys
- Functions** • Entry
- Finish** See *Selection Guide*.

T401	PT	LTS	C15	KD	W
SERIES	STYLE	TRIM	FINISH	KEYING	LATCH

SELECTION GUIDE

	C10B OIL RUB. BRONZE	C11P ANTIQU BRONZE	C15 SATIN NICKEL	C15A ANTIQU NICKEL	C19 MATTE BLACK	C26 POLISHED CHROME	C26D SATIN CHROME	C3 POLISHED BRASS	C32D SATIN S.STEEL	C4 SATIN BRASS	C5 ANTIQU BRASS	V3* POLISHED BRASS	/CASE
ARCO	AR		•		•	•	•						6
PLATO	PT		•		•	•	•						6

OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED – PLEASE CONTACT (*) LIFETIME FINISH WARRANTY

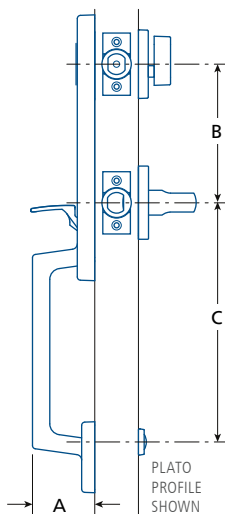

	A	B	C
ARCO	2 ¹¹ / ₁₆	5*	8 ¹¹ / ₁₆
ARLTS	(68)	(127)	(220)
PLATO	2 ¹¹ / ₁₆	5½	9 ²⁷ / ₃₂
PTLTS	(68)	(140)	(250)

IN (MM) (*) RECOMMENDED DISTANCE

