



- Certifications**
- Conforms to ANSI/BHMA A156.3, Grade 1
 - cULus listed, up to 3hr Fire Exit
 - 5 Year limited warranty
- Rail Assembly**
- Stainless steel rail assembly
 - Field sizable
- Handing**
- Handed, field reversible
- Door Width**
- 30–38" (762–965 mm)
 - 36–48" (914–1219 mm) – option
- Door Thickness**
- 1 3/4" (45 mm)
- Stile Width**
- 5 1/2" (140 mm) minimum
- Measured from door edge*
- Projection**
- 2 1/8" (54 mm) from door surface
- Lock Case**
- Conforms to ANSI/BHMA A156.13 and A156.3 Grade 1
 - Fits ANSI/BHMA A115.1 door preparation
 - Adjustable faceplate for bevelled doors up to 1/8" over 2" (3 mm over 51 mm)

- Latchbolt**
- 2 piece, anti-friction stainless steel latchbolt with deadlatch
 - 3/4" (19 mm) throw

- Strike**
- T-type strike

- Dogging**
- —

- Hardware**
- Machine and wood screws

- Electrical**
- Electric latch retraction – option

- Options**
- Alarm kit – available*
 - Request to exit – available*

(Sold separately, see 9500 Trims & Accessories)*

- Functions**
- 10 Passage
 - 70 Classroom
 - 80 Storeroom

Escutcheon lever trim & mortise cylinder required, not included – sold separately, see 9500TEM

- Trims**
- Escutcheon trim (matching function) – required

Sold separately, see 9500TEM

- Finish**
- 32D–Satin Stainless Steel

Other finishes available by special order


9500M	70	R3	LHR	-	32D
MODEL	FUNCTION	SIZE ¹	HAND ²		FINISH

(1) SEE SELECTION GUIDE (2) LHR–LEFT HAND REVERSED, RHR–RIGHT HAND REVERSED

SELECTION GUIDE

MODEL	FUNCTION	SIZE	DOOR WIDTH ¹	DOGGING	FINISH	/CASE	
9500M	Fire Exit Hardware ² Mortise Rim	10 Passage	R3	30–38 (762–965)	—	32D	4
		70 Classroom ➔ 80 Storeroom ➔	R4*	36–48 (914–1219)	—	32D	4

(1) RECOMMENDED DOOR WIDTH, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT. (2) FIRE EXIT HARDWARE MUST BE INSTALLED ON FIRE LABELLED DOORS.
(*) SPECIAL ORDER—PLEASE CONTACT.

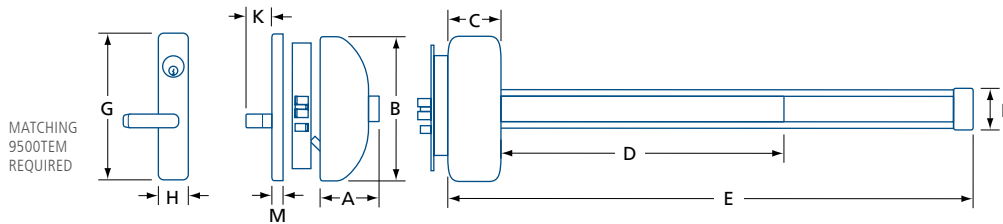

MODEL	A	B	C	D	E ¹	F	G	H	K	M
9500M R3	2 1/8 (54)	8 5/8 (219)	2 5/8 (67)	21 13/16 (554)	32 1/2 (825)	2 1/8 (54)	8 3/4 (222)	2 (50.8)	2 1/8 (54)	1/2 (12.7)
9500M R4				27 1/2 (698)	44 1/2 (1130)					

IN (MM) (1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

9500TEM ESCUTCHEON TRIM



Trim	9500TEM10	9500TEM70	9500TEM80
Exit Device	9500M10	9500M70	9500M80
Function	Passage	Classroom ➔	Storeroom ➔
Finish	32D	32D	32D
Lever	Straight return	Straight return	Straight return
Cylinder ¹	—	Mortise	Mortise
Escutcheon (HxW)	8 3/4 x 2 (222 x 50.8)	8 3/4 x 2 (222 x 50.8)	8 3/4 x 2 (222 x 50.8)
Lever (B)	4 9/16 (116)	4 9/16 (116)	4 9/16 (116)
Projection (C)	2 5/8 (67)	2 5/8 (67)	2 5/8 (67)
Door Thickness	1 3/4 (44.5)	1 3/4 (44.5)	1 3/4 (44.5)
Warranty	1 Year limited	1 Year limited	1 Year limited

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, 1-1/4IN (32MM), SCHLAGE "C", 2 KEYS INCLUDED – KEYING SERVICES AVAILABLE

PARTS & COMPONENTS

See 9500 Trims & Accessories for additional items.

