


FLUSH BOLTS

GENERAL HARDWARE

AUTOMATIC EXTENSION FLUSH BOLT

FB610M

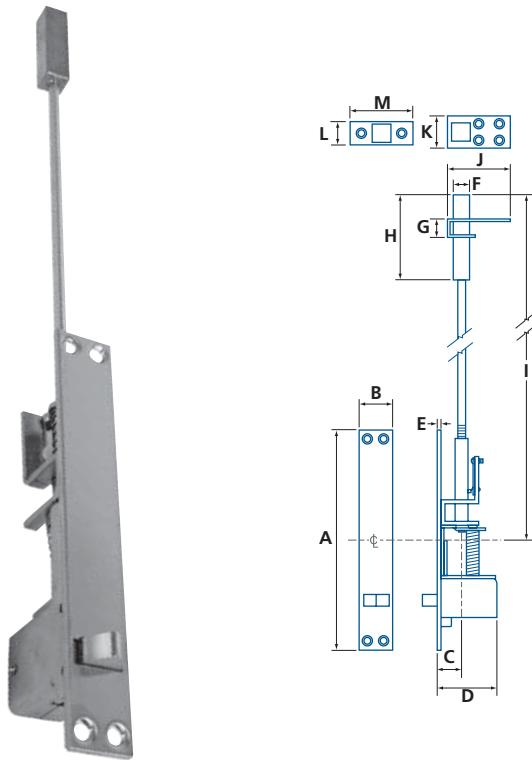

- cULus labeled and rated only for hollow metal doors up to and including 3 hrs. Conforms to UL 10C and UBC 7-2-1997
- Top and bottom flush bolts for use on metal doors measuring up to 4 ft. (1219 mm) wide and 8 ft. (2438 mm) high
- Fits standard and ANSI preparation for metal doors
- Steel components
- Fully automatic, when active door is opened, inactive door is free
- Maintains inactive door locked in case of fire
- Supplied with bolt guide and door strike
- Mounting hardware included: machine and combination Machine-wood screws

MODEL	FINISH	A	B	C	D	E	F	G	H	I	J	K	L	M
FB610M	32D	6 $\frac{3}{4}$ (171)	1 (25.4)	$\frac{3}{4}$ (19.1)	1 $\frac{7}{8}$ (47.6)	$\frac{1}{8}$ (3.2)	$\frac{1}{2}$ (12.7)	$\frac{5}{8}$ (15.9)	2 (50.8)	12 (305)	2 (50.8)	1 (25.4)	1 (25.4)	2 $\frac{1}{4}$ (57)

IN (MM)

