



HYDRAULIC PATCH FITTING SIZE 3





CONTENTS

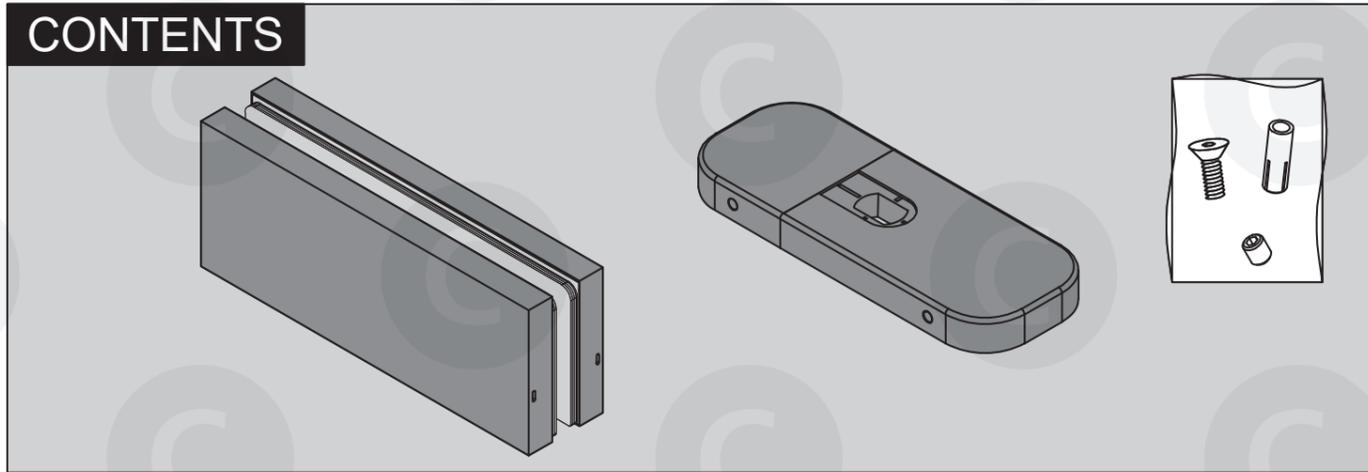








ADJUSTMENT

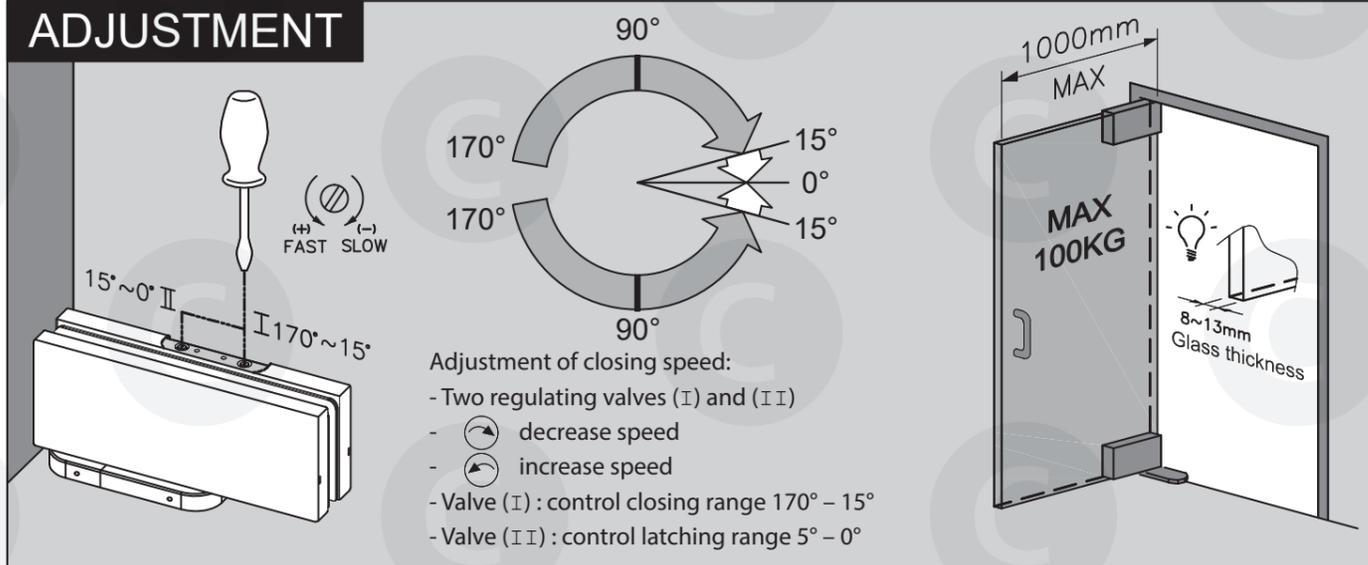

PATCH FITTINGS

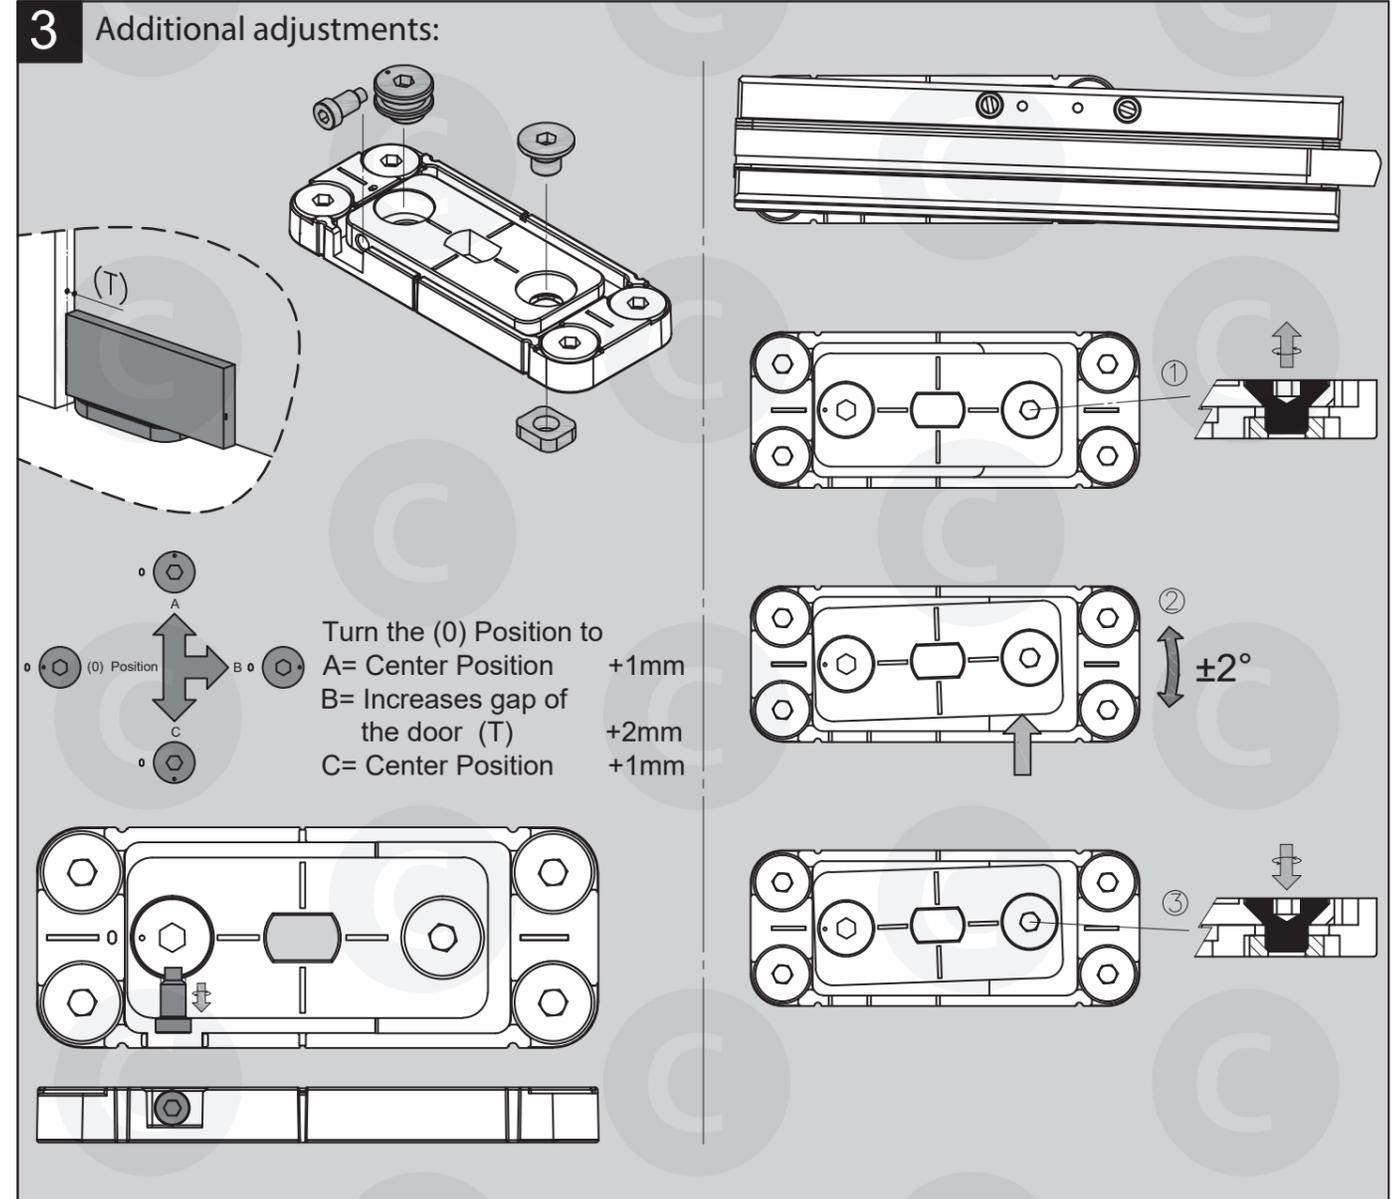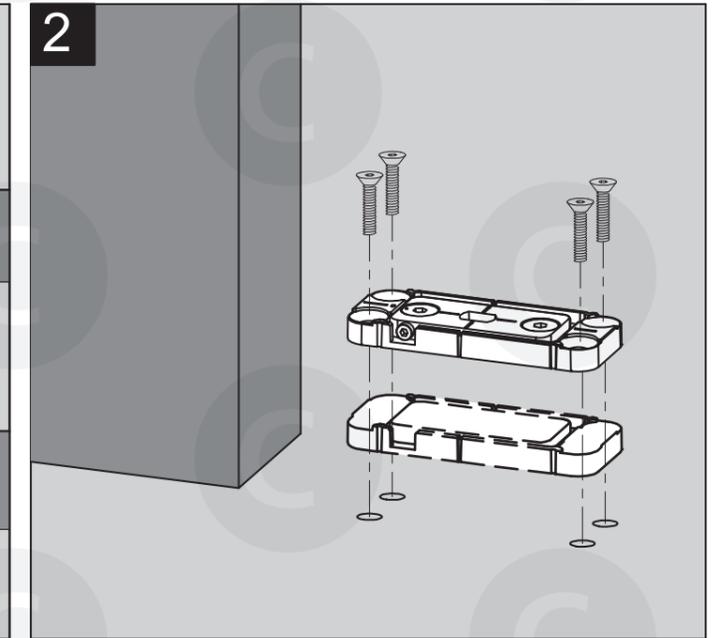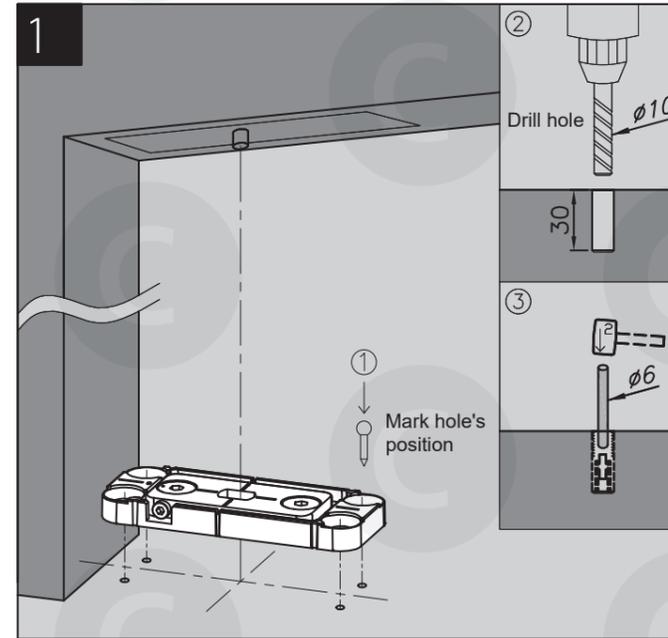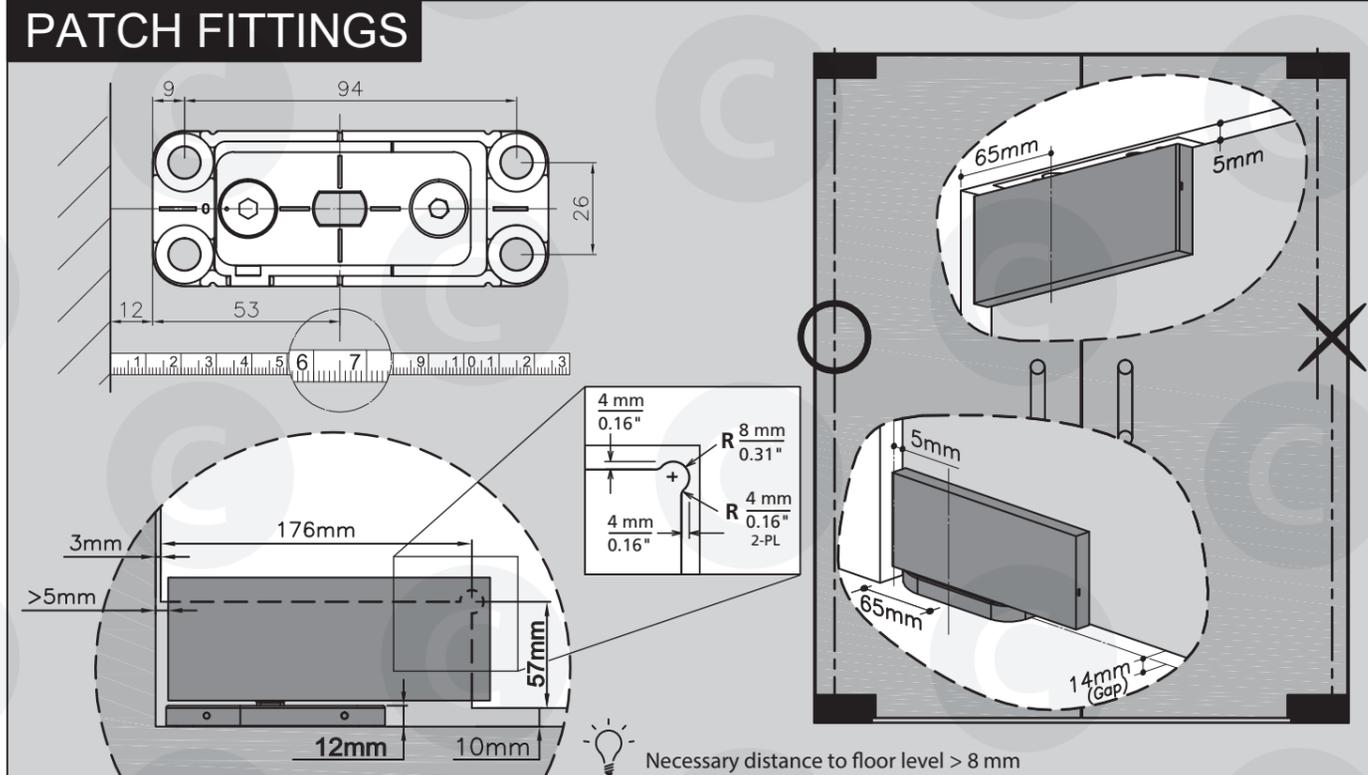

HYDRAULIC PATCH FITTING SIZE 3

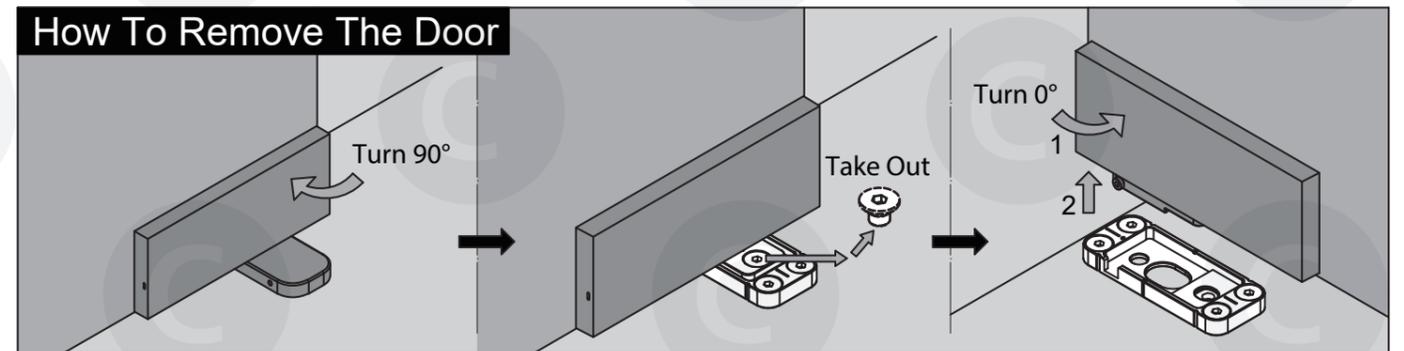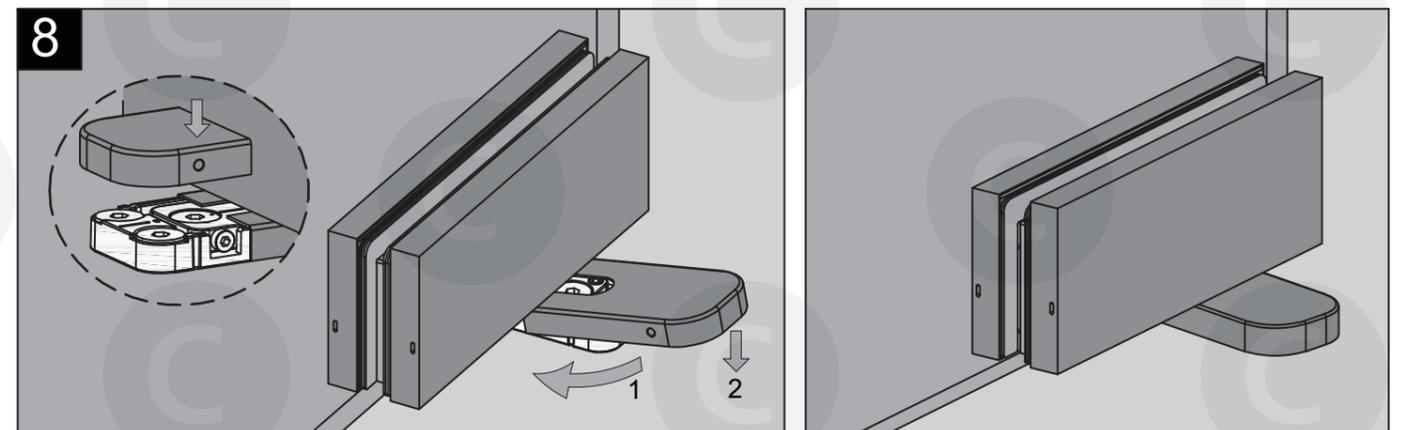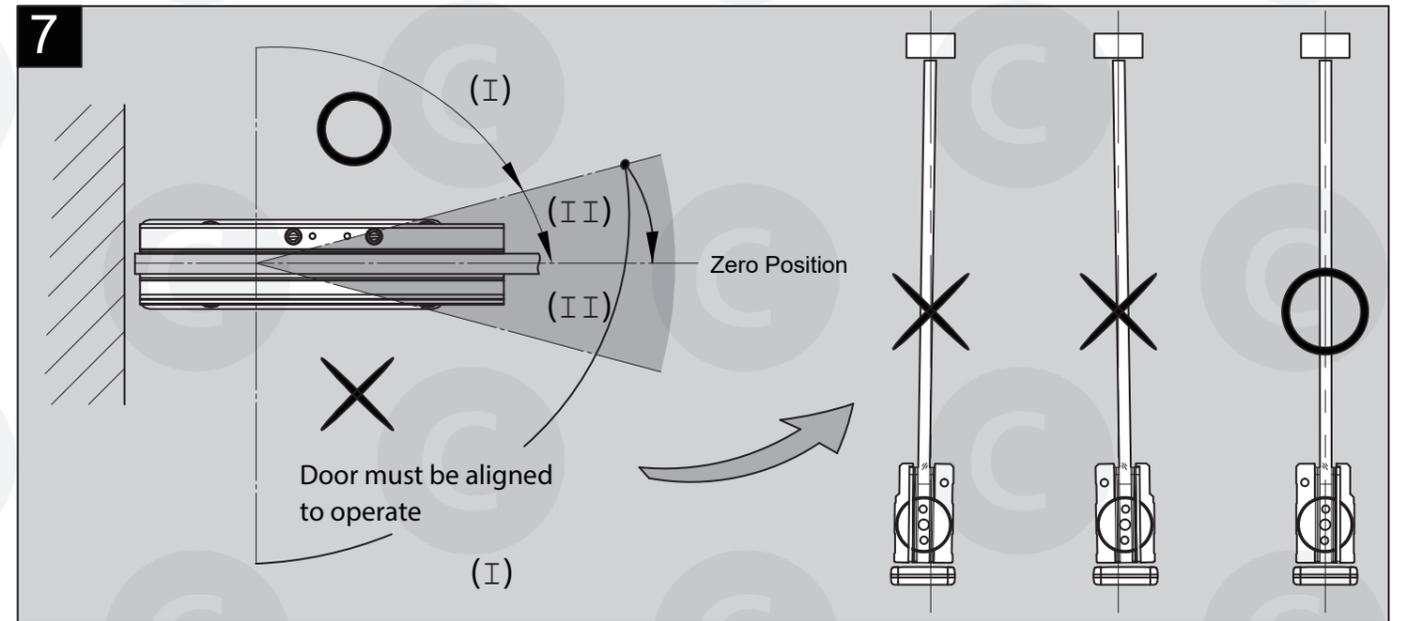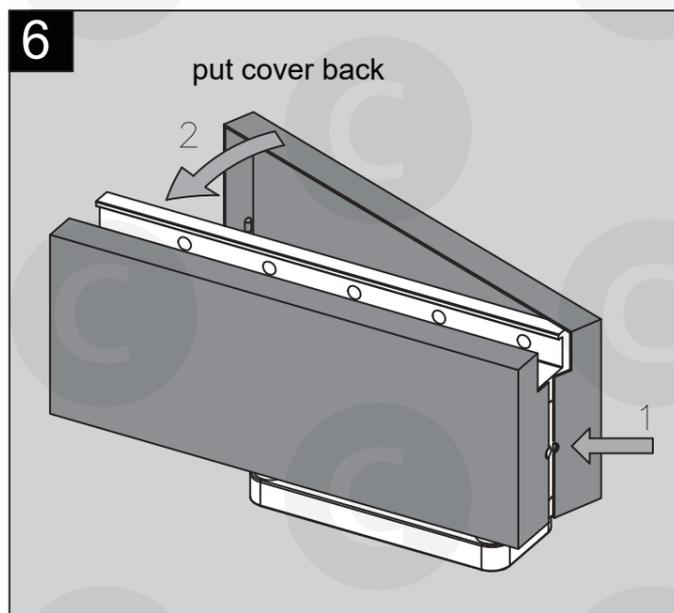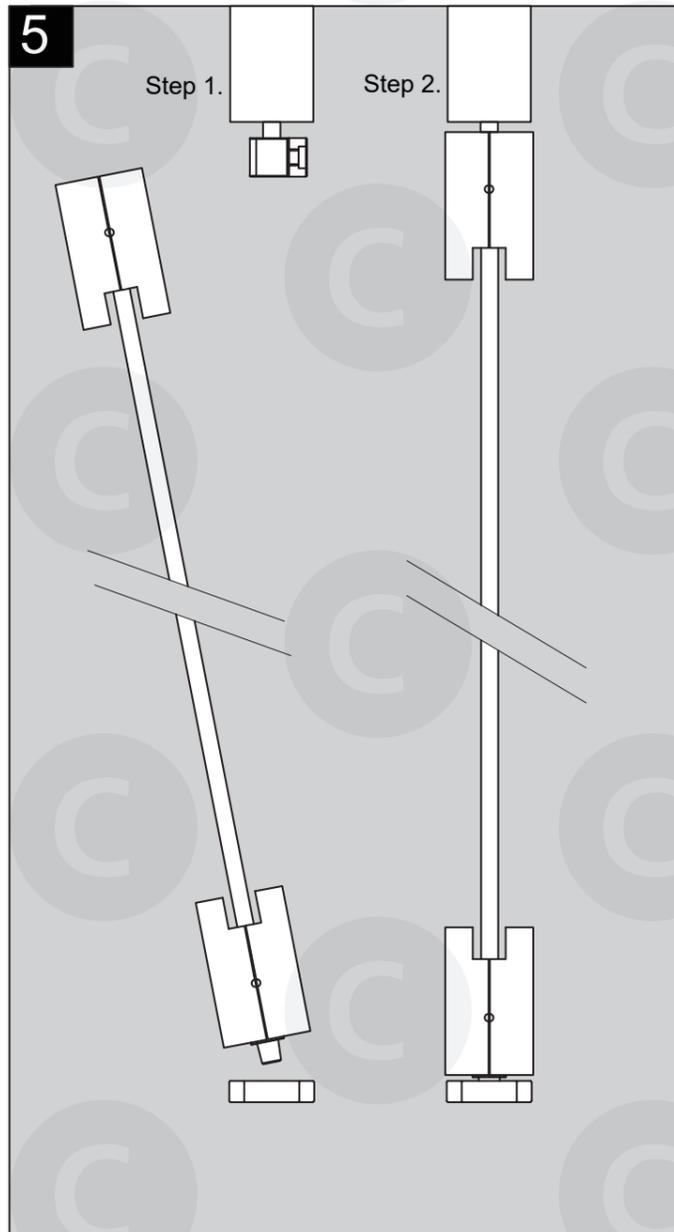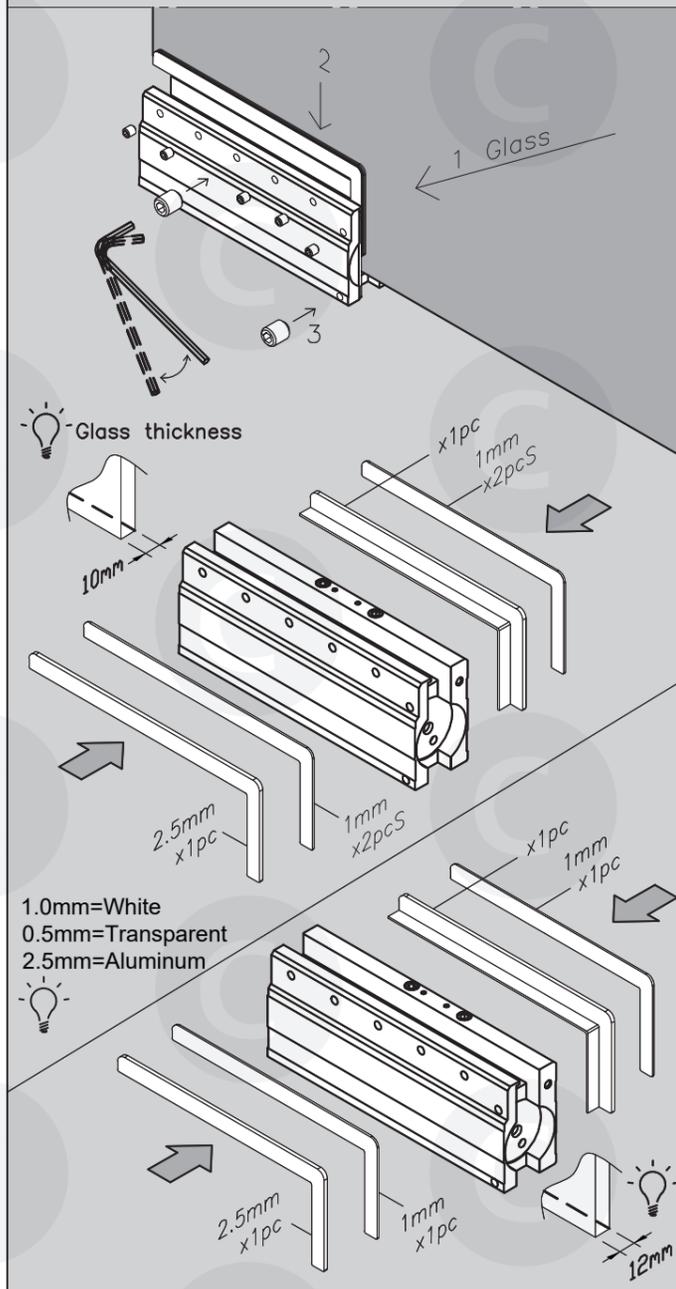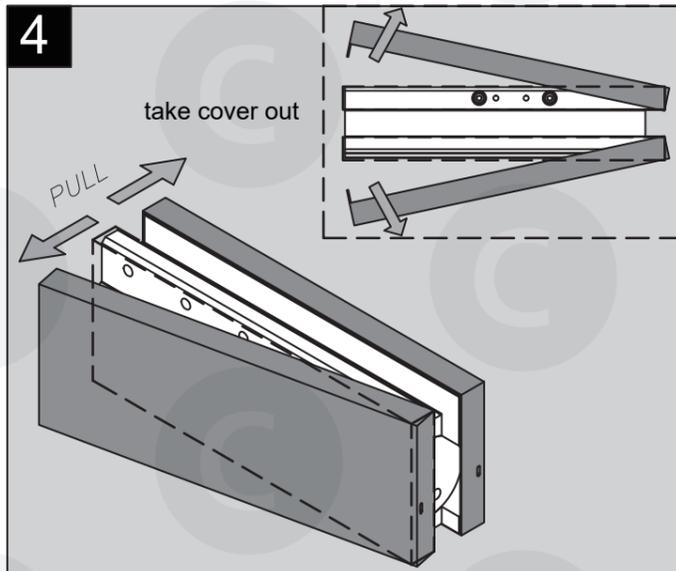

IMPORTANT INSTALLATION NOTES

AFTER INSTALLATION, PLEASE CHECK AND TEST :

1. Open the door to its maximum opening and release. The door should close fully into the door frame and overcome the latch (if one is present).
2. If there's a latch, open the door and rest the latch bolt on the strike. Release the door. The door closer should have sufficient power to close and latch the door.

MAINTENANCE :

1. Verify the door closer every three months to insure all fixings are secure. If necessary, adjust closing and latching speeds to ensure a smooth operation.
2. Apply light oil to arm knuckle joint and door hinges.