



- Heavy weight, full mortise
- 5 knuckles, 4 ball bearings
- Steel or stainless steel hinge and pin
- Conforms to ANSI/BHMA A156.1
- ANSI/BHMA A156.7 template hole pattern
- Non-handed
- Flat tips with knock-out bottom
- Wood screws and undercut machine screws included

OPTIONS

NRP: Non-removable pin (NRP)


| | | | | | | |
|--------|------|--------|--------|-----|---|-----|
| BB1068 | - | 4545 | - | 26D | - | NRP |
| MODEL | SIZE | FINISH | OPTION | | | |

| SIZE | INCHES | MM | GAUGE | HOLES | SCREWS INCLUDED | | QTY ¹ |
|-------|---------------|---------------|-------|-------|-----------------|-------------|------------------|
| | | | | | MACHINE | WOOD | |
| 4545* | 4 1/2 x 4 1/2 | 114.3 x 114.3 | 0.180 | 8 | #12-24 x 1/2 | #12 x 1 1/4 | 3/48 |
| 545* | 5 x 4 1/2 | 127 x 114.3 | 0.190 | 8 | #12-24 x 1/2 | #12 x 1 1/4 | 3/48 |
| 55* | 5 x 5 | 127 x 127 | 0.190 | 8 | #12-24 x 1/2 | #12 x 1 1/4 | 3/48 |

(1) 3/48 : QUANTITY PER BOX / QUANTITY PER CASE. HINGES NOT SOLD INDIVIDUALLY. (*) FIRE RATING AS PER NFPA80 GUIDELINES.

| P | 26D | 32D |
|--------------|--------------|-----------------------|
| PRIME COATED | SATIN CHROME | SATIN STAINLESS STEEL |

OTHER SIZES AND FINISHES AVAILABLE BY SPECIAL ORDER, PLEASE CONTACT FOR DETAILS.

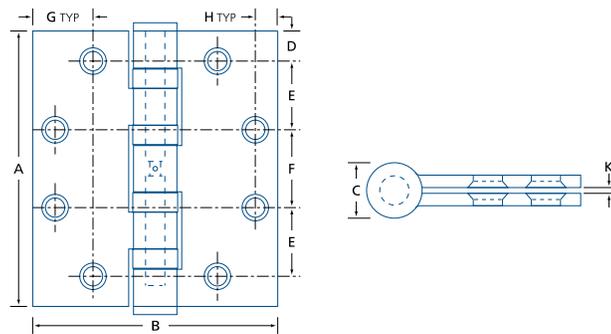

| MODEL | A | B | C | D | E | F | G | H | K |
|-------------|------------------|------------------|-------------|---------------|-----------------|-------------------|-------------|--------------|---------------|
| BB1068 4545 | 4 1/2 (114.3) | 4 1/2 (114.3) | 3/4 (19) | 1/2 (12.7) | 1 1/8 (28.6) | 1 15/64 (31) | 1 (25.4) | 3/8 (9.5) | 1/16 (1.8) |
| BB1068 545 | 5 (127.0) | 4 1/2 (114.3) | 3/4 (19) | 1/2 (12.7) | 1 1/8 (28.6) | 1 15/64 (31) | 1 (25.4) | 3/8 (9.5) | 1/16 (1.8) |
| BB1068 55 | 5 (127.0) | 5 (127.0) | 3/4 (19) | 1/2 (12.7) | 1 1/4 (31.8) | 1 15/32 (37.7) | 1 (25.4) | 3/8 (9.5) | 1/16 (1.8) |

DIMENSIONS IN INCHES (MILLIMETRES) AS PER ANSI A156.7